

ENGINEERING DOCUMENTATION

Coreless Brushed DC Motor

Dimensional & Integration Guide

DOCUMENT	REVISION / ISSUE	STATUS
DIG-ES-CM-BR02-M001	DRAFT-08 / 28 Aug 2026	Engineering Integration Reference

Integration Overview


Compact electric motor for specified rotary actuation. This guide supports mounting, shaft, load-path, drive, thermal, cable and commissioning planning for ES-CM-BR02-M001.

Key Integration Facts

INTEGRATION ITEM	VALUE
Rated Torque	10.7 mNm
Instantaneous Maximum Torque	40 mNm
No-Load Rotational Speed	6600 rpm
Maximum Continuous Current	0.37 A
Torque Constant	35.5 mNm/A
Instantaneous Maximum Current	1.1 A
Motor Speed Constant per Volt	274 rpm/V
Continuous Rated Current	0.37 A

3D Orientation Reference

This axonometric reference provides a quick orientation check for the motor or actuator body, output interface and mounting relationship of ES-CM-BR02-M001.

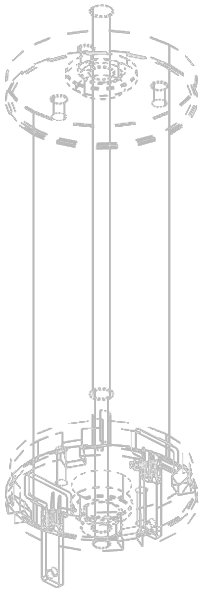

Axonometric Orientation View


Orientation reference only. Use the exact-SKU parameter table and mechanical drawing for dimensions, hole geometry, fits and machining decisions.

Exact-SKU Interface Cross-Reference


INTEGRATION TOPIC	EXACT-SKU REFERENCE
Motor envelope and output orientation	Confirm this interface or boundary from the exact-SKU parameter table and mechanical drawing.
Drive and motion boundaries	Rated Voltage: 24 V; Continuous Rated Current: 0.37 A; Rated Torque: 10.7 mNm. Confirm interface geometry, fits and installation details in the exact-SKU mechanical drawing.
Installed load and thermal reference	Rotor Inertia: 2.8 gcm ² ; Weight: 45 g; Insulation Class: F/155 °C. Confirm interface geometry, fits and installation details in the exact-SKU mechanical drawing.

Product Structure & Views


These views present product structure, mounting interfaces and relevant integration geometry for this SKU.

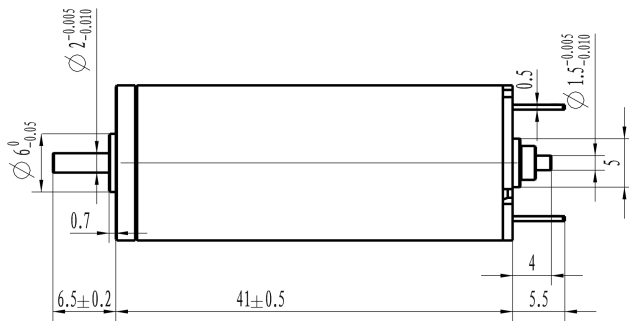


Mechanical View 1

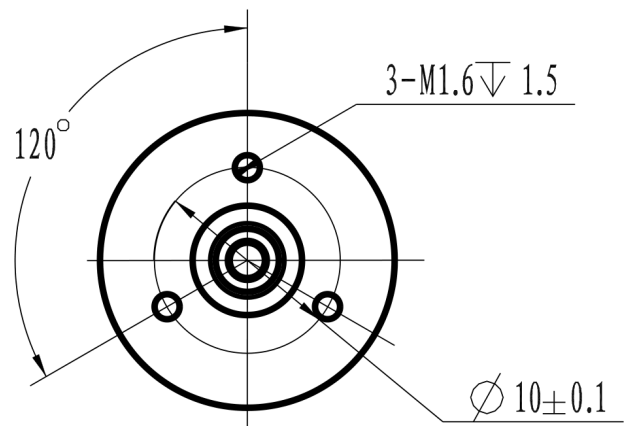

Mechanical View 2

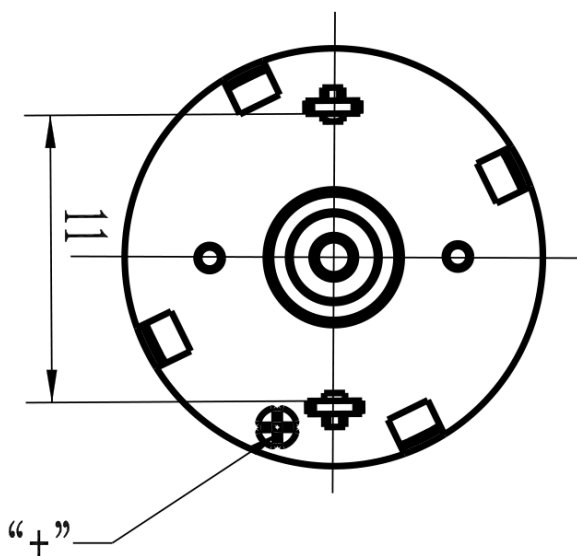

Mechanical View 3

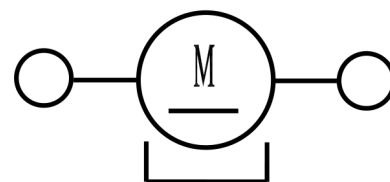

Mechanical View 5

VIEW	FIELD	VALUE
Mechanical View 1	Left shaft diameter with tolerance	$\varnothing -0.005/-0.010$
	Left shaft collar diameter with tolerance	$\varnothing -0.05$
	Left shaft extension length	0.7
	Left end total length	6.5 ± 0.2
	Motor body length	41 ± 0.5
	Right side step depth	0.5
	Right shaft diameter with tolerance	$\varnothing 5 -0.005/-0.010$
	Right shaft segment length	5
	Right side boss width	4
	Right end total length	5.5
Mechanical View 3	Mounting hole thread specification and depth	3 holes, M1.6 thread, 1.5mm depth
	Mounting hole angular distribution	120°
	Mounting hole pattern circle diameter	$\varnothing 10 \pm 0.1$
Mechanical View 5	Front face local vertical dimension	11mm

Technical Specifications

PARAMETER	VALUE	UNIT
Rated Torque	10.7	mNm
Instantaneous Maximum Torque	40	
No-Load Rotational Speed	6600	rpm
Maximum Continuous Current	0.37	A
Torque Constant	35.5	mNm/A
Instantaneous Maximum Current	1.1	A
Motor Speed Constant per Volt	274	rpm/V
Continuous Rated Current	0.37	A
Insulation Class	F/155 °C	
No-load Current	0.012	A
Rated Voltage	24	V
Weight	45	g
Mechanical Time Constant	5.02	ms
Rotor Inertia	2.8	gcm ²
Operating Temperature	-20 to 65	°C
Line-to-line inductance	1.46	mH

Technical Specifications - Continued

PARAMETER	VALUE	UNIT
Motor length	40	mm
Commutator segment count	7	
Housing-to-Ambient Thermal Resistance	21	K/W
Line-to-line resistance	22.6	Ω
Brush type	Graphite brush	
Maximum Winding Temperature	155	$^{\circ}\text{C}$
Speed Constant	163	rpm/mNm
Maximum efficiency	78	%
Loaded Speed	4600	rpm
Motor diameter	16	mm

Mounting, Shaft and Load Path

- Support the complete mounting face, preserve locating features and verify fastener engagement without distorting the housing.
- Align the shaft and coupling before tightening, and validate radial load, axial load, overhung distance, belt tension, inertia and shock for the installed mechanism.

Drive, Electrical and Motion Integration

- Coordinate supply, drive current limit, speed, torque and fault protection with the actual load and duty cycle.
- Use applicable wiring data for conductor identity, polarity, phase pairing, shielding and grounding; do not infer these from the product view.

Thermal, Cable and Commissioning Conditions

- Validate housing and winding temperature over the intended operating cycle, ambient condition, mounting heat path and enclosure airflow.
- Provide strain relief and service clearance, then commission at reduced energy and verify direction, current limits, motion response, temperature and fault behavior.

Integration Checklist

- | | |
|----|---|
| 01 | Confirm the exact-SKU drawing and parameter set. |
| 02 | Verify mounting geometry, locating features, shaft engagement, coupling alignment and service clearance. |
| 03 | Validate torque, speed, inertia, radial and axial loads, overhung distance and shock. |
| 04 | Set drive, current, motion, wiring, grounding and thermal boundaries from applicable product documentation. |
| 05 | Commission at reduced energy and verify direction, motion response, temperature and fault behavior. |

[View SKU Product Datasheet](#) [Request controlled 2D drawing](#) [Request controlled STEP review](#) [Request a Quote](#)

Engineering Use and Verification Notice

01. This Dimensional & Integration Guide applies only to EmbodyStack SKU ES-CM-BR02-M001 and is intended for dimensional evaluation and preliminary integration. It is not a applicable manufacturing drawing, motor or actuator application approval, wiring definition, drive-selection approval, machinery risk assessment, safety validation or production authorization. Before design freeze, installation or energization, verify all dimensions, mounting and locating features, moving envelopes, shaft or output geometry, permissible loads, alignment, supply and current limits, wiring, motion profile, duty cycle, thermal condition, cable routing, environmental boundaries, maintenance and fault response against the applicable EmbodyStack engineering data for this exact SKU. Validate the complete installed system under intended operating and fault conditions.