

ENGINEERING DOCUMENTATION

Six Axis Force Sensor

Dimensional & Integration Guide

DOCUMENT	REVISION / ISSUE	STATUS
DIG-ES-SN-C30-S001-V008	DRAFT-08 / 25 Aug 2026	Engineering Integration Reference

Integration Overview


Six-axis force/torque sensing component for measuring three orthogonal force components and three orthogonal moment components. This guide supports mechanical layout, wiring planning and signal commissioning for ES-SN-C30-S001-V008.

Key Integration Facts

INTEGRATION ITEM	PUBLISHED VALUE
Dimensions	26 × 80 (diameter) mm
Mass	686 g
Measurement Axes	6 axes
Force Range (Fxy)	2400 N
Force Range (Fz)	3200 N
Torque Range (Mxy)	80 Nm
Torque Range (Mz)	80 Nm
Communication Interface	Ethernet; EtherCAT; RS-485; analog output
Operating Temperature	-10 to +55 °C
Ingress Protection	IP64; IP67 customization available

Annotated 3D Orientation and Interface Views

Orthographic 3D views identify the product body, primary interface and mounting relationships for ES-SN-C30-S001-V008.

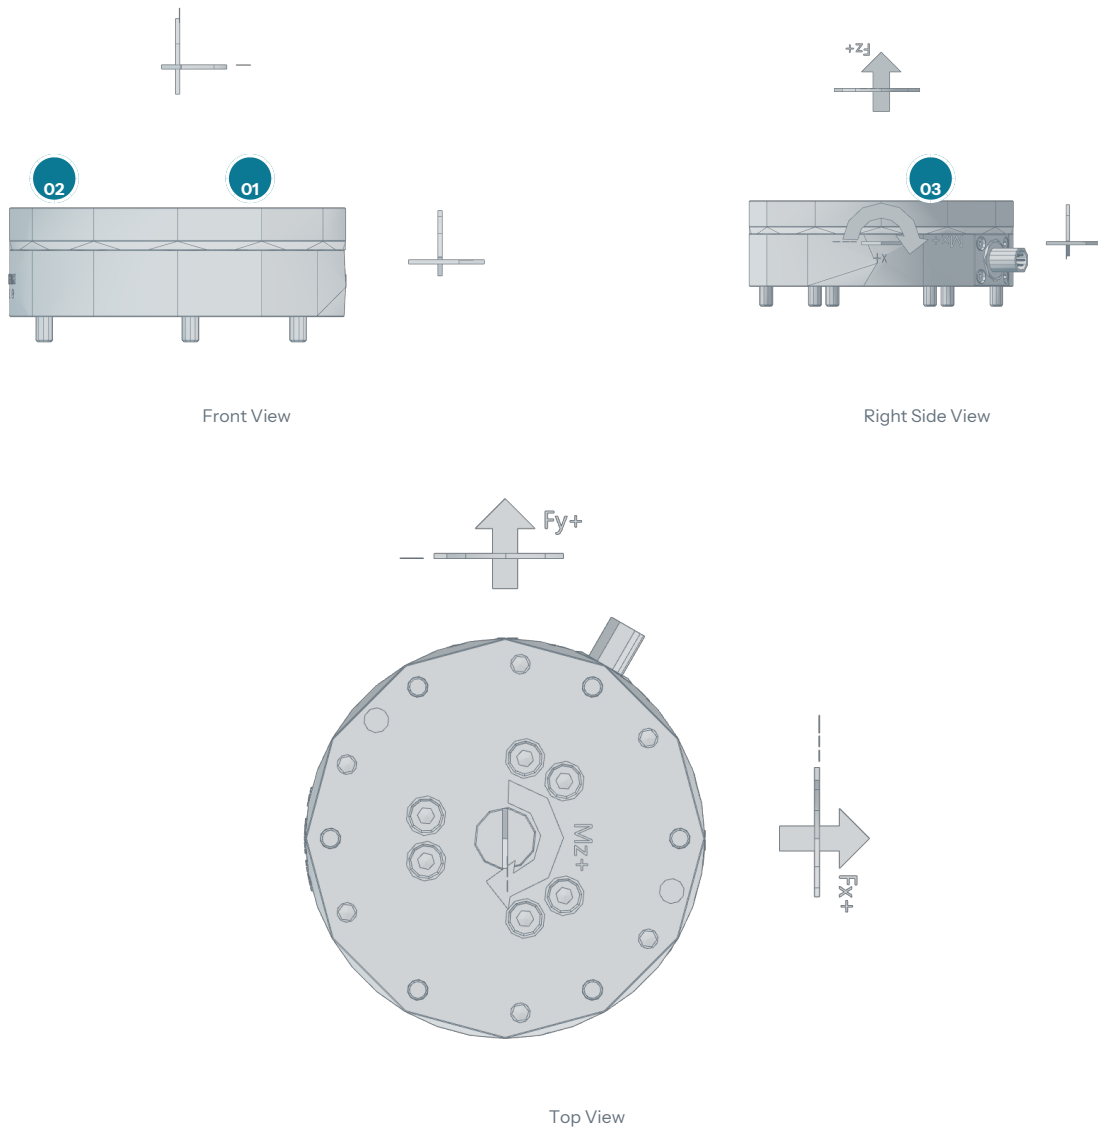


Numbered references identify the principal interfaces used by the integration sections.

Functional Callout Schedule


REF.	VIEW	INTEGRATION REFERENCE
01	Front View	Primary product envelope
02		Primary interface
03	Right Side View	Mounting and locating interface

Product Structure & Views


These views present product structure, mounting interfaces and relevant integration geometry for this SKU.

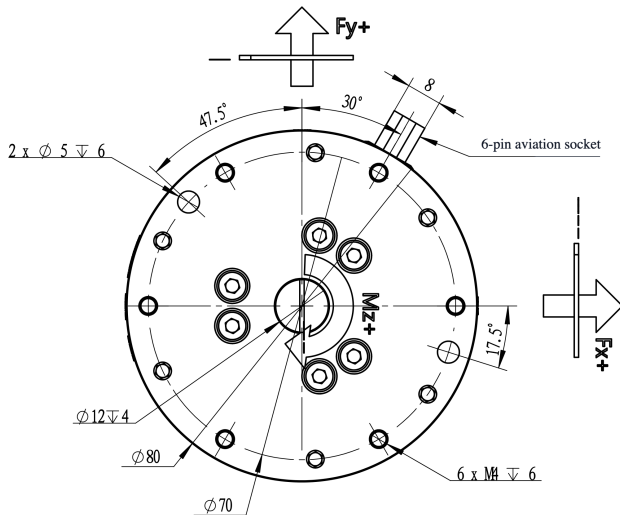


Mechanical View 1

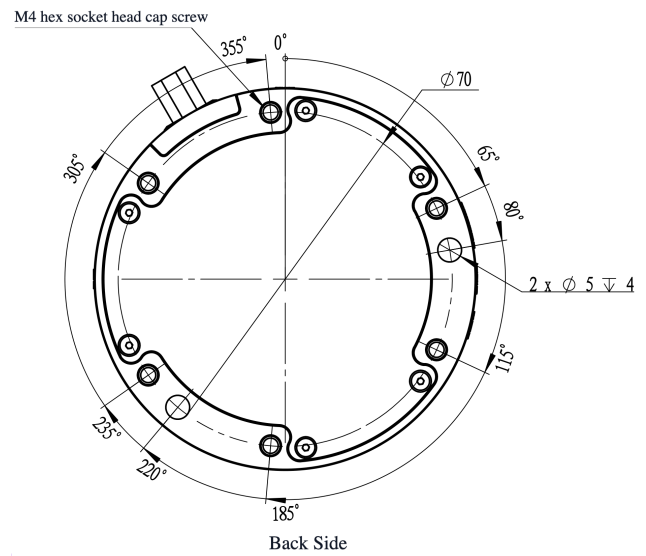

Mechanical View 2

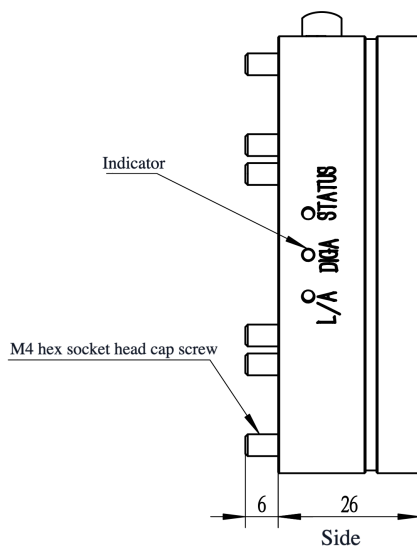

Mechanical View 3

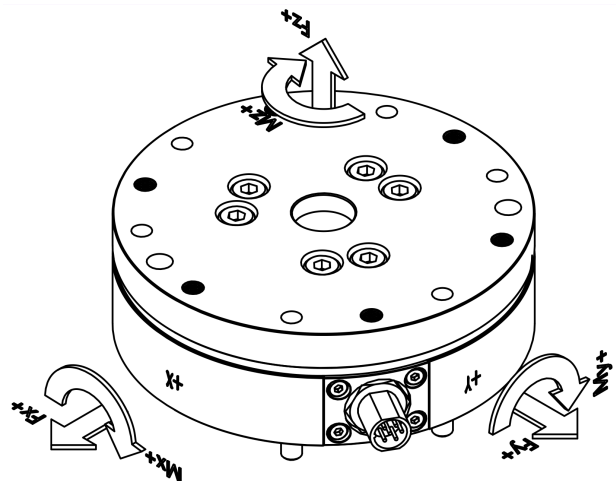

Mechanical View 4

VIEW	FIELD	VALUE
Mechanical View 1	Positive Fy load direction label	Fy positive direction
	Upper angular positioning angle	30 degrees
	Two diameter 5 holes depth 6	2 x diameter 5, depth 6
	Positive Mz moment direction label	Mz positive direction
	Right-side angular positioning angle	17.5 degrees
	Positive Fx load direction label	Fx positive direction
	Diameter 12 hole depth 4	diameter 12, depth 4
	Outer diameter	diameter 80
	Six M4 threaded holes depth 6	6 x M4, depth 6
	Mounting hole pitch circle diameter	diameter 70 pitch circle
	View name	Front side view
Mechanical View 2	Sensor supplied screw note	M4 hex socket head cap screw
	Angular reference position	0 degrees reference position
	Mounting angular position	355 degrees
	Circular diameter	Diameter 70 mm
	Mounting angular position	305 degrees
	Mounting angular position	80 degrees
	Blind hole specification	2 holes, diameter 5 mm, depth 4 mm
	Mounting angular position	115 degrees
	Mounting angular position	220 degrees
	Mounting angular position	185 degrees
	View label	Back side view
Mechanical View 3	Indicator callout	Indicator
	M4 hex socket head cap screw	M4 hex socket head cap screw
	Left protrusion or mounting segment width	6 mm
	Main body side thickness	26 mm
	View label	Side view

Overall Dimensions and Mounting Interface

PARAMETER	PUBLISHED VALUE	UNIT
Dimensions	26 × 80 (diameter)	mm
Mass	686	g

- Mounting holes, locating features and face geometry are governed by the 2D views. Do not infer thread engagement, mounting torque or manufacturing tolerances from the overall envelope.

Load and Measurement Coordinate Frame

PARAMETER	PUBLISHED VALUE	UNIT
Measurement Axes	6	axes

- The measurement data set comprises Fx, Fy, Fz, Mx, My and Mz. Establish the host transform from the exact coordinate origin and axis directions in the applicable product documentation and calibration data.

Force/Torque Measurement Envelope

PARAMETER	PUBLISHED VALUE	UNIT
Force Range (Fxy)	2400	N
Force Range (Fz)	3200	N
Torque Range (Mxy)	80	N·m
Torque Range (Mz)	80	N·m
Resolution (Fxy)	0.01	%FS
Resolution (Fz)	0.01	%FS
Resolution (Mxy)	0.01	%FS
Resolution (Mz)	0.01	%FS
Nonlinearity	0.5	%FS
Axis Crosstalk	2	%FS
Overload Capacity	350	%

- Loads within the published overload capacity may still change sensor parameters. After an overload event, verify zero and measurement behavior before returning the assembly to service.

Connector, Cable and Data Interface

PARAMETER	PUBLISHED VALUE	UNIT
System Architecture	Digital output with adapter	
Communication Interface	Ethernet; EtherCAT; RS-485; analog output	
INTERFACE	CONNECTOR / PHYSICAL LAYER	AVAILABILITY / FUNCTION
Ethernet		
EtherCAT		
RS-485		
Analog output		
External Connector Type	Cold-pressed terminal	
Power Consumption	1.5	W
Maximum Output Data Rate	2700	Hz
Maximum RS-485 Output Data Rate	2200	Hz

- Select and qualify one output path for the ordered configuration. The published interface list represents available architecture choices and must not be interpreted as simultaneous native interfaces.
- Before energizing the assembly, verify power polarity, data-line assignment and shield termination against the applicable wiring documentation for the selected interface path.
- Provide strain relief and route the cable so that cable loads are not transferred into the sensing body or mounting interface.
- Qualify the required output rate with the selected interface and host acquisition path; use the published exact-SKU interface-specific limit where one is provided.

Operating and Ingress Conditions

PARAMETER	PUBLISHED VALUE	UNIT
Operating Temperature	-10 to +55	°C
Ingress Protection	IP64; IP67 customization available	

- The product ingress rating does not establish the protection rating of the complete host enclosure. Validate cable entry, mating interfaces and enclosure sealing in the final assembly.

Ingress Configuration Conditions

CONFIGURATION	PUBLISHED CONDITION	INTEGRATION REQUIREMENT
Standard configuration	IP64	Use this rating only for the exact standard SKU configuration and validate sealing in the final host assembly.
Custom ingress configuration	IP67 option available by confirmation	Do not assign IP67 to this SKU unless the ordered configuration and applicable product documentation explicitly confirm it.

Mounting & Signal Commissioning

- Align the mating faces and avoid installation preload, bending or forced fit that could bias the unloaded output.
- After power-up, allow 10-20 minutes for thermal stabilization before final zeroing or baseline recording.
- After mechanical installation and thermal stabilization, perform the supported zeroing procedure and confirm unloaded outputs before commissioning.

Integration Checklist

- 01 Confirm EmbodyStack SKU ES-SN-C30-S001-V008 and the exact 2D package before laying out the host interface.
- 02 Confirm the mounting face, hole pattern, locating features and required installation clearance.
- 03 Confirm that the host does not introduce preload, misalignment, bending or cable force into the sensing body.
- 04 Confirm the selected output architecture, power path, wiring assignment, grounding and shield strategy.
- 05 Confirm the required output rate against the published exact-SKU and interface-specific limits.
- 06 Confirm the operating temperature and the standard ingress condition for the ordered configuration.
- 07 Allow thermal stabilization, perform zeroing and record the unloaded baseline after installation.
- 08 Define an inspection and re-verification action after any overload event.
- 09 Request current 2D, STEP and wiring documentation before final design or integration planning.

[View SKU Product Datasheet](#) [Request controlled 2D drawing](#) [Request controlled STEP review](#) [Request a Quote](#)

Engineering Use and Verification Notice

01. This Dimensional & Integration Guide applies only to EmbodyStack SKU ES-SN-C30-S001-V008 and is intended for dimensional evaluation and preliminary integration. It is not a applicable manufacturing drawing and must not be used as the sole basis for machining, tooling, tolerance allocation, wiring final integration, safety validation, enclosure certification or integration planning. during integration planning, verify all dimensions, mounting interfaces, coordinate definitions, load limits, cable and adapter configuration, power delivery, grounding, ingress conditions and environmental limits against the applicable EmbodyStack engineering data for this exact SKU. Where this guide and applicable product documentation differ, the applicable product documentation governs. Validate the complete host assembly under its intended loads, environment, duty cycle and applicable regulatory requirements.

specified Resources