

PRODUCT DATASHEET

ES-HG-S07-F20-R50

Precision Transmission Component

Hat Harmonic Gearboxes | High-Torque Hat Unit Type I

Product Overview

Precision Transmission Component with rated Torque 33 N·m, instantaneous Maximum Torque 127 N·m and start/Stop Peak Torque 73 N·m.

Key Specifications

PARAMETER	VALUE	UNIT
Rated Torque	33	N·m
Instantaneous Maximum Torque	127	N·m
Start/Stop Peak Torque	73	N·m
Reduction Ratio	50	
Maximum Input Speed	6500	r/min
Allowable Average Torque	44	N·m
Backlash	≤20	arc sec
Frame Size	20	
Weight	0.72	kg

Technical Specifications


PARAMETER	SPECIFICATION	UNIT	NOTES
PERFORMANCE			
Rated Torque	33	Nm	Frame Size: 20; Reduction Ratio: 50; Size: 20
Instantaneous Maximum Torque	127	Nm	Frame Size: 20; Reduction Ratio: 50; Size: 20
Start/Stop Peak Torque	73	Nm	Frame Size: 20; Reduction Ratio: 50; Size: 20
Backlash	≤20	arc sec	Reduction Ratio: 50; Size: 20; Frame Size: 20
Allowable Average Torque	44	Nm	Frame Size: 20; Reduction Ratio: 50; Size: 20
Starting Torque	8.6 / 0.086	Nm	Frame Size: 20; Reduction Ratio: 50; Size: 20 / Reduction Ratio: 50; Size: 20; Frame Size: 20
Angular Transmission Accuracy	1	arcmin	Frame Size: 20; Reduction Ratio: 50; Size: 20
Hysteresis Loss	2	arcmin	Frame Size: 20; Reduction Ratio: 50; Size: 20
MECHANICAL			
Frame Size	20		Frame Size: 20; Reduction Ratio: 50; Size: 20
Weight	0.72	kg	Frame Size: 20; Reduction Ratio: 50
Wave Generator Dimension T	12.8+0.10 / 9.4+0.10 / 16.3+0.10	mm	Varies by published configuration.
Wave Generator Bore U	φ8H7 / φ14H7 / φ11H7		Varies by published configuration.
Wave Generator Keyway W	4JS9/P9 / 5JS9/P9 / 3JS9/P9		Varies by published configuration.
RELIABILITY			
Design Life	10000	h	Frame Size: 20; Reduction Ratio: 50; Size: 20
ADDITIONAL SPECIFICATIONS			
Reduction Ratio	50		Frame Size: 20; Reduction Ratio: 50; Size: 20
Maximum Input Speed	6500	r/min	Frame Size: 20; Reduction Ratio: 50; Size: 20
Average Input Speed	3500	r/min	Frame Size: 20; Reduction Ratio: 50; Size: 20
Wave Generator T	12.8 ⁺ +0.1_0 / 16.3 ⁺ +0.1_0 / 9.4 ⁺ +0.1_0	mm	Varies by published configuration.
Wave Generator U	φ11H7 / φ14H7 / φ8H7		Varies by published configuration.
Wave Generator W	3JS9/P9 / 4JS9/P9 / 5JS9/P9		Varies by published configuration.
Torsional Rigidity K2	1.8	×10 ⁴ Nm/rad	Frame Size: 20; Reduction Ratio: 50; Size: 20
Torsional Rigidity K1	1.3	×10 ⁴ Nm/rad	Frame Size: 20; Reduction Ratio: 50; Size: 20
Torsional Rigidity K3	2.3	×10 ⁴ Nm/rad	Frame Size: 20; Reduction Ratio: 50; Size: 20
Torsional Rigidity T2	25	Nm	Frame Size: 20; Reduction Ratio: 50; Size: 20
Torsional Rigidity T1	7	Nm	Frame Size: 20; Reduction Ratio: 50; Size: 20

Dimensional & Integration Overview


Mechanical Overview

PARAMETER	VALUE	UNIT
Frame Size	20	
Weight	0.72	kg
Wave Generator Dimension T	12.8+0.10 / 9.4+0.10 / 16.3+0.10	mm
Wave Generator Bore U	φ8H7 / φ14H7 / φ11H7	
Wave Generator Keyway W	4JS9/P9 / 5JS9/P9 / 3JS9/P9	


Dimensional Drawings




Mechanical View 1

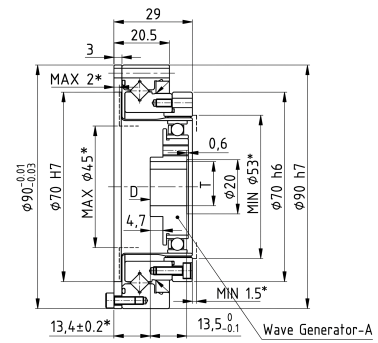

Mechanical View 2

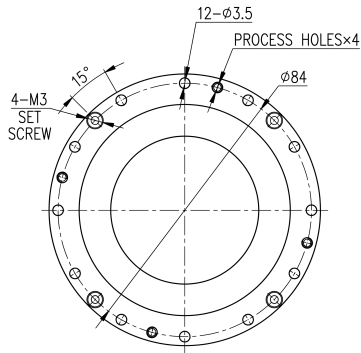

Mechanical View 3

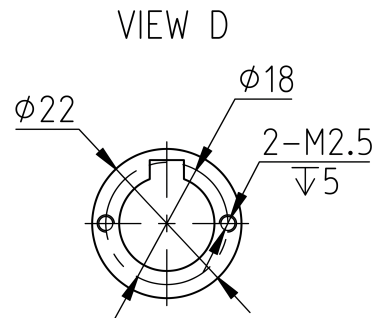

Mechanical View 4

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 1	Sixteen diameter 3.5 holes	16 holes, diameter 3.5 mm
	Depth for diameter 3.5 holes	Depth 7.5 mm
	Width W	Width W, value not specified in this crop
	Diameter 62	Diameter 62 mm
	Sixteen M3 threaded holes	16 M3 threaded holes
	Depth for M3 threaded holes	Depth 6 mm
	Variable U	U, value not specified in this crop
	Process holes quantity four	Process holes ×4
	Diameter 27	Diameter 27 mm
	M4 threaded holes	M4 threaded holes; quantity not reliably OCR-confirmed

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 2	Overall Length	29 mm
	Internal Section Length	20.5 mm
	Mounting Boss Depth	3 mm
	Maximum Radial Deviation	MAX 2 mm (reference)
	Clearance or Feature Height	0.6 mm
	Maximum Outer Diameter	MAX Φ 45 mm (reference)
	Minimum Inner Diameter	MIN Φ 53 mm (reference)
	Mounting Flange Outer Diameter	Φ 90 -0.01/-0.03 mm
	Mounting Bore Diameter	Φ 70 H7
	Shaft Diameter	Φ 20 mm
	Wave Generator Shaft Diameter	Φ 90 h7
	Feature Dimension or Clearance	4.7 mm
	Minimum Clearance	MIN 1.5 mm (reference)
	Mounting Height	13.5 0/-0.1 mm
	Mounting Reference Height	13.4 $\pm$ 0.2 mm (reference)
	Datum Reference	Datum D

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 3	12 holes diameter 3.5	12 holes, diameter 3.5 mm
	Process holes quantity	Process holes, quantity 4
	Diameter 84 circle	Diameter 84 mm
	4 M3 set screws	4 × M3 set screw
Mechanical View 4	Detail view identifier	View D
	Inner hole diameter	Diameter 18 mm
	Outer circular feature diameter	Diameter 22 mm
	Threaded hole quantity and size	2 holes, M2.5 thread
	Depth callout	Depth 5 mm

[View Product Online](#) [Request Engineering Data](#) [Request a Quote](#)

01 Specifications are subject to change without notice. Verify the current product configuration before final design release.

02 2D drawings, CAD files and integration documentation are controlled documents and are supplied separately on request.