

PRODUCT DATASHEET

ES-HG-S09-F32-R100

Precision Transmission Component

Hollow Shaft Harmonic Gearboxes | High-Torque Hollow Shaft Gear Unit

Product Overview

Precision Transmission Component with rated Torque 178 Nm, instantaneous Maximum Torque 841 Nm and start/Stop Peak Torque 433 Nm.

Key Specifications

PARAMETER	VALUE	UNIT
Rated Torque	178	Nm
Instantaneous Maximum Torque	841	Nm
Start/Stop Peak Torque	433	Nm
Reduction Ratio	100	
Maximum Input Speed	4800	r/min
Allowable Average Torque	281	Nm
Backlash	≤20	arc sec
Frame Size	32	
Weight	4.2	kg

Technical Specifications

PARAMETER	SPECIFICATION	UNIT	NOTES
PERFORMANCE			
Rated Torque	178	Nm	Frame Size: 32; Reduction Ratio: 100; Size: 32
Instantaneous Maximum Torque	841	Nm	Frame Size: 32; Reduction Ratio: 100; Size: 32
Start/Stop Peak Torque	433	Nm	Frame Size: 32; Reduction Ratio: 100; Size: 32
Backlash	≤20	arc sec	Reduction Ratio: 100; Size: 32; Frame Size: 32
Allowable Average Torque	281	Nm	Frame Size: 32; Reduction Ratio: 100; Size: 32
Angular Transmission Accuracy	1	arcmin	Frame Size: 32; Reduction Ratio: 100; Reduction Ratio Min: 50; Size: 32
Hysteresis Loss	1	arcmin	Frame Size: 32; Reduction Ratio: 100; Reduction Ratio Min: 50; Size: 32
MECHANICAL			
Frame Size	32		Frame Size: 32; Reduction Ratio: 100; Size: 32
Weight	4.2	kg	Frame Size: 32; Reduction Ratio: 100; Size: 32

Technical Specifications


PARAMETER	SPECIFICATION	UNIT	NOTES
RELIABILITY			
Design Life	15000	h	Frame Size: 32; Reduction Ratio: 100; Size: 32
ADDITIONAL SPECIFICATIONS			
Reduction Ratio	100		Frame Size: 32; Reduction Ratio: 100; Size: 32
Maximum Input Speed	4800	r/min	Frame Size: 32; Reduction Ratio: 100; Size: 32
Average Input Speed	3500	r/min	Frame Size: 32; Reduction Ratio: 100; Size: 32
Torsional Rigidity K2	11	$\times 10^4$ Nm/rad	Frame Size: 32; Reduction Ratio: 100; Reduction Ratio Min: 50; Size: 32
Torsional Rigidity K1	6.7	$\times 10^4$ Nm/rad	Frame Size: 32; Reduction Ratio: 100; Reduction Ratio Min: 50; Size: 32
Torsional Rigidity K3	12	$\times 10^4$ Nm/rad	Frame Size: 32; Reduction Ratio: 100; Reduction Ratio Min: 50; Size: 32
Torsional Rigidity T2	108	Nm	Frame Size: 32; Reduction Ratio: 100; Reduction Ratio Min: 50; Size: 32
Torsional Rigidity T1	29	Nm	Frame Size: 32; Reduction Ratio: 100; Reduction Ratio Min: 50; Size: 32

Dimensional & Integration Overview


Mechanical Overview

PARAMETER	VALUE	UNIT
Frame Size	32	
Weight	4.2	kg


Dimensional Drawings

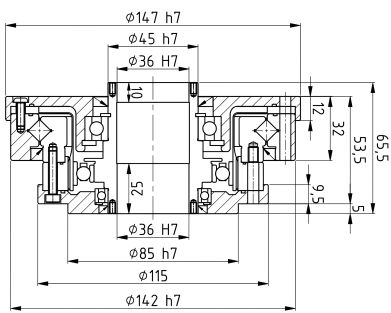

Mechanical View 1

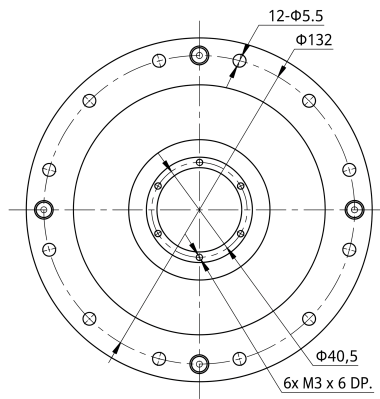

Mechanical View 2

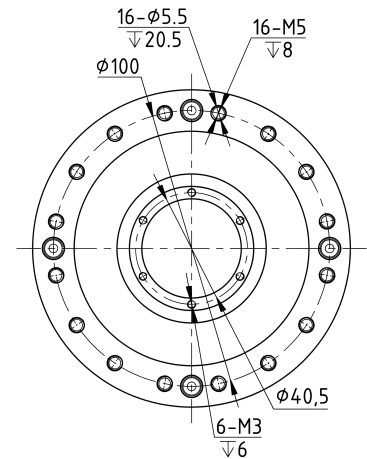

Mechanical View 3

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 1	Overall outer diameter	Φ147 h7
	Inner shaft diameter (upper)	Φ45 h7
	Central bore diameter (upper)	Φ36 H7
	Mounting depth / flange height	10
	Mid-section height	25
	Central bore diameter (lower)	Φ36 H7
	Groove depth / step dimension	9.5
	Outer shaft diameter	Φ85 h7
	Intermediate outer diameter	Φ115
	Bottom outer diameter	Φ142 h7
	Small dimension marking	2
	Vertical dimension	32
		53.5
		65
Mechanical View 2	Flange mounting hole count and diameter	12 holes, Φ5.5 mm
	Mounting hole pitch circle diameter (PCD)	Φ132 mm PCD
	Center positioning hole diameter	Φ40.5 mm
	Threaded hole specification and depth	6 holes, M3 thread, 6 mm depth

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 3	Hole diameter and quantity	16 holes, Φ 5.5 mm
	Hole depth	Depth 20.5 mm
	Threaded hole specification and quantity	16 threaded holes, M5
	Threaded hole depth	Depth 8 mm
	Outer diameter	Φ 100 mm
	Bolt circle diameter	Φ 40.5 mm
	Inner threaded hole specification and quantity	6 threaded holes, M3
	Inner threaded hole depth	Depth 6 mm

[View Product Online](#) [Request Engineering Data](#) [Request a Quote](#)

01 Specifications are subject to change without notice. Verify the current product configuration before final design release.

02 2D drawings, CAD files and integration documentation are controlled documents and are supplied separately on request.