

PRODUCT DATASHEET

ES-HG-S11-F25-R80

Precision Transmission Component

Cup Harmonic Gearboxes | Lightweight Cup Unit Type I

Product Overview

Precision Transmission Component with rated Torque 63 Nm, instantaneous Maximum Torque 255 Nm and start/Stop Peak Torque 137 Nm.

Key Specifications

PARAMETER	VALUE	UNIT
Rated Torque	63	Nm
Instantaneous Maximum Torque	255	Nm
Start/Stop Peak Torque	137	Nm
Reduction Ratio	80	
Backlash	≤20	arc sec
Maximum Input Speed	5600	r/min
Allowable Average Torque	87	Nm
Frame Size	25	
Weight	1.14	kg

Technical Specifications


PARAMETER	SPECIFICATION	UNIT	NOTES
PERFORMANCE			
Rated Torque	63	Nm	Frame Size: 25; Reduction Ratio: 80
Instantaneous Maximum Torque	255	Nm	Frame Size: 25; Reduction Ratio: 80
Start/Stop Peak Torque	137	Nm	Frame Size: 25; Reduction Ratio: 80
Backlash	≤20	arc sec	Frame Size: 25; Reduction Ratio: 80
Allowable Average Torque	87	Nm	Frame Size: 25; Reduction Ratio: 80
MECHANICAL			
Frame Size	25		Frame Size: 25; Reduction Ratio: 80
Weight	1.14	kg	Frame Size: 25; Reduction Ratio: 80
Wave Generator Dimension T	12.8+0.10 / 16.3+0.10	mm	Frame Size: 25; Option Label: Wave generator - A ϕ 11; Reduction Ratio: 80; Wave Generator Option: wave-generator-fd26f6670d9b / Frame Size: 25; Option Index: 1; Option Label: Wave generator - A ϕ 14; Reduction Ratio: 80; Wave Generator Option: wave-generator-307ae5fd0846
Wave Generator Bore U	ϕ 11H7 / ϕ 14H7		Frame Size: 25; Option Label: Wave generator - A ϕ 11; Reduction Ratio: 80; Wave Generator Option: wave-generator-fd26f6670d9b / Frame Size: 25; Option Index: 1; Option Label: Wave generator - A ϕ 14; Reduction Ratio: 80; Wave Generator Option: wave-generator-307ae5fd0846
Wave Generator Keyway W	5JS9/P9 / 4JS9/P9		Frame Size: 25; Option Index: 1; Option Label: Wave generator - A ϕ 14; Reduction Ratio: 80; Wave Generator Option: wave-generator-307ae5fd0846 / Frame Size: 25; Option Label: Wave generator - A ϕ 11; Reduction Ratio: 80; Wave Generator Option: wave-generator-fd26f6670d9b
RELIABILITY			
Design Life	15000	h	Frame Size: 25; Reduction Ratio: 80
ADDITIONAL SPECIFICATIONS			
Reduction Ratio	80		Frame Size: 25; Reduction Ratio: 80
Maximum Input Speed	5600	r/min	Frame Size: 25; Reduction Ratio: 80
Average Input Speed	3500	r/min	Frame Size: 25; Reduction Ratio: 80

Dimensional & Integration Overview


Mechanical Overview

PARAMETER	VALUE	UNIT
Frame Size	25	
Weight	1.14	kg
Wave Generator Dimension T	12.8+0.10 / 16.3+0.10	mm
Wave Generator Bore U	φ11H7 / φ14H7	
Wave Generator Keyway W	5JS9/P9 / 4JS9/P9	


Dimensional Drawings

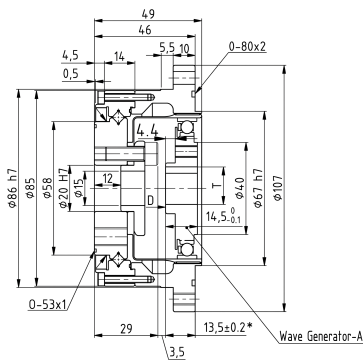


Mechanical View 1

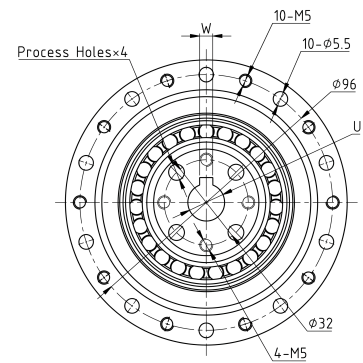

Mechanical View 2



Mechanical View 3

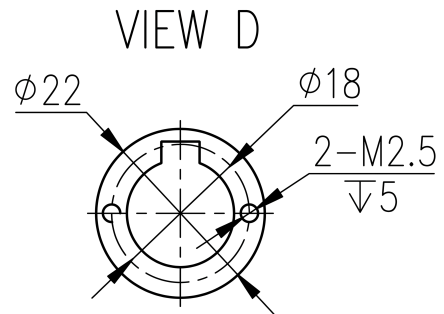

Mechanical View 4

2D Drawing Dimensions & Callouts

VIEW	FIELD		VALUE
Mechanical View 1	Overall axial length		49
	Inner axial length		46
	O-ring or groove callout		O-80 x 2
	Local axial dimensions		5.5 and 10
	End step axial width		4.5
	Local axial length		14
	Small step axial width		0.5
	Local clearance or offset dimension		4.4
	Diameter 86 h7 fit		Diameter 86 h7
	Diameter 20 H7 fit		Diameter 20 H7
	Diameter 58		
	Outer diameter 107		Diameter 107
	Diameter 85		
	Diameter 40		
	Diameter 15		
	Diameter 67 h7 fit		Diameter 67 h7
	Local axial dimension		12
	Dimension symbol T		T, value not specified in this crop

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 1	Dimension symbol D	D, value not specified in this crop
	Axial dimension 14.5 tolerance	14.5 +0/-0.1
	O-ring or groove callout	O-53 x 1
	Axial dimension 13.5 tolerance	13.5 ±0.2
	Bottom axial length	29

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 2	Number of process holes	4 process holes
	View or feature label W	Label W
	M5 threaded holes quantity	10 × M5 threaded holes
	Diameter 5.5 holes quantity and diameter	10 × Ø5.5 holes
	Diameter 96	Ø96
	View or feature label U	Label U
	Diameter 32	Ø32
	M5 holes quantity	4 × M5 holes
Mechanical View 3	M8 threaded mounting holes quantity and size	8 × M8 threaded holes
	Hole diameter	Diameter 42
Mechanical View 4	View identifier	View D
	Hole diameter	Diameter 22 mm
		Diameter 18 mm
	Threaded hole quantity and size	2 × M2.5 threaded holes
	Hole depth or depth callout	Depth 5 mm

[View Product Online](#)
[Request Engineering Data](#)
[Request a Quote](#)

01 Specifications are subject to change without notice. Verify the current product configuration before final design release.

02 2D drawings, CAD files and integration documentation are controlled documents and are supplied separately on request.