PRODUCT DATASHEET

ES-PS-C32-S001-V006

Precision Linear Motion Assembly

Standard Planetary Roller Screws | Standard Planetary Roller Screw Series

Product Overview

Precision Linear Motion Assembly with nominal diameter 100 mm, ball Screw Lead 25 mm and rated dynamic load C_a 901 kN.

Key Specifications

PARAMETER	VALUE	UNIT
Nominal diameter	100	mm
Ball Screw Lead	25	mm
Rated dynamic load C_a	901	kN
Rated static load C_{oa}	2748	kN
Maximum dynamic load C_a	960	kN
Maximum static load C_{oa}	3023	kN
Forward theoretical efficiency η	0.88	ratio
Reverse theoretical efficiency η´	0.87	ratio
Body diameter D	200	mm

Technical Specifications

PARAMETER	SPECIFICATION	UNIT
PERFORMANCE		
Rated dynamic load C_a	901	kN
Rated static load C_{oa}	2748	kN
Maximum dynamic load C_a	960	kN
Maximum static load C_{oa}	3023	kN
MECHANICAL		
Nominal diameter	100	mm
Ball Screw Lead	25	mm
CONFIGURATION		
Development status	Standard listing	
ADDITIONAL SPECIFICATIONS		
Forward theoretical efficiency η	0.88	ratio
Reverse theoretical efficiency η´	0.87	ratio
Body diameter D	200	mm

Technical Specifications


PARAMETER	SPECIFICATION	UNIT
ADDITIONAL SPECIFICATIONS		
Overall length W	260	mm
Thread count N	5	
Segment length W_1	80	mm
Diameter d_0	99	mm
Overall height H	203	mm
Segment length W_2	100	mm
Diameter d_1	100.8	mm
Diameter d_2	96.5	mm
Segment length W_3	130	mm

Dimensional & Integration Overview


Mechanical Overview

PARAMETER	VALUE	UNIT
Nominal diameter	100	mm
Ball Screw Lead	25	mm
Body diameter D	200	mm
Overall length W	260	mm
Segment length W_1	80	mm
Diameter d_0	99	mm

Dimensional Drawings

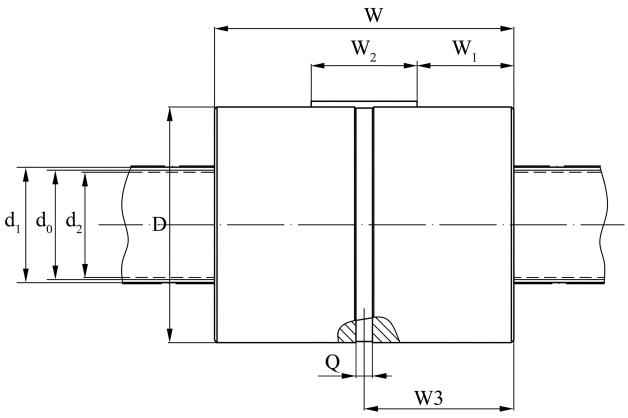

Mechanical View 1

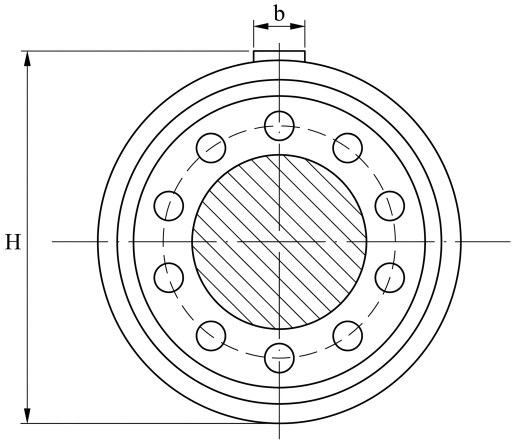

Mechanical View 2

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 1	Overall length W	W
	Segment length W2	W2
	Segment length W1	W1
	Shaft diameters d1, d0 and d2	d1; d0; d2
	Body diameter D	D
	Slot or keyway width Q	Q
	Lower segment length W3	W3
Mechanical View 2	Mounting hole pattern pitch/width symbol	b, value Not specified
	Overall height	H, value Not specified

View Product Online Request Engineering Data Request a Quote

01 Specifications are subject to change without notice. Verify the current product configuration before final design release.

02 2D drawings, CAD files and integration documentation are controlled documents and are supplied separately on request.