

PRODUCT DATASHEET

ES-PS-C32-S001-V140

Precision Linear Motion Assembly

Standard Planetary Roller Screws | Standard Planetary Roller Screw Series

Product Overview

Precision Linear Motion Assembly with nominal diameter 75 mm, ball Screw Lead 20 mm and rated dynamic load C_a 583 kN.

Key Specifications

PARAMETER	VALUE	UNIT
Nominal diameter	75	mm
Ball Screw Lead	20	mm
Rated dynamic load C_a	583	kN
Rated static load C_{0a}	1457	kN
Maximum dynamic load C_a	621	kN
Maximum static load C_{0a}	1603	kN
Forward theoretical efficiency η	0.88	ratio
Reverse theoretical efficiency η'	0.87	ratio
Body diameter D	150	mm

Technical Specifications

PARAMETER	SPECIFICATION	UNIT
PERFORMANCE		
Rated dynamic load C_a	583	kN
Rated static load C_{0a}	1457	kN
Maximum dynamic load C_a	621	kN
Maximum static load C_{0a}	1603	kN
MECHANICAL		
Nominal diameter	75	mm
Ball Screw Lead	20	mm
Interface thread Q	M8×1	
Mounting hole pattern G	8× ϕ 17.5	
CONFIGURATION		
Development status	Standard listing	
ADDITIONAL SPECIFICATIONS		
Forward theoretical efficiency η	0.88	ratio

Technical Specifications


PARAMETER	SPECIFICATION	UNIT
ADDITIONAL SPECIFICATIONS		
Reverse theoretical efficiency η'	0.87	ratio
Body diameter D	150	mm
Overall length W	191	mm
Thread count N	5	
Segment length W_1	73	mm
Diameter d_0	75	mm
Segment length W_2	45	mm
Angle α	22.5	°
Diameter d_1	76.4	mm
Diameter d_2	73	mm

Dimensional & Integration Overview

Mechanical Overview

PARAMETER	VALUE	UNIT
Nominal diameter	75	mm
Ball Screw Lead	20	mm
Interface thread Q	M8×1	
Mounting hole pattern G	8× $\varnothing$ 17.5	
Body diameter D	150	mm
Overall length W	191	mm

Dimensional Drawings

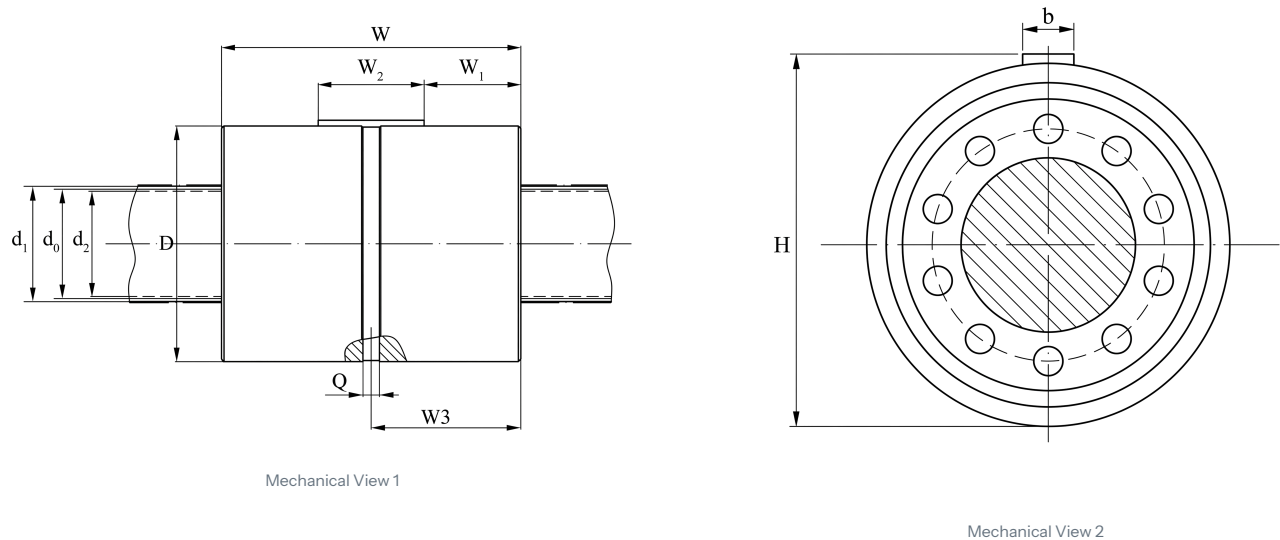

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 1	Overall length W	W
	Segment length W2	W2
	Segment length W1	W1
	Shaft diameters d1, d0 and d2	d1; d0; d2
	Body diameter D	D
	Slot or keyway width Q	Q
	Lower segment length W3	W3
Mechanical View 2	Mounting hole pattern pitch/width symbol	b, value Not specified
	Overall height	H, value Not specified

[View Product Online](#)[Request Engineering Data](#)[Request a Quote](#)

01 Specifications are subject to change without notice. Verify the current product configuration before final design release.

02 2D drawings, CAD files and integration documentation are controlled documents and are supplied separately on request.