

PRODUCT DATASHEET

ES-SD-C21-S001-V003

Industrial Motion Controller

Medium Power Servo Drives | Medium-Power Servo Drive Series - ES-SD-C21-S001

Product Overview

Industrial Motion Controller with logic Supply Voltage 18 to 30 VDC, 1 A, peak Output Current A / 15 A and communication Protocol RS232; RS485; Pulse train.

Key Specifications

PARAMETER	VALUE	UNIT
Logic Supply Voltage	18 to 30 VDC, 1 A	
Peak Output Current	A / 15	A
Communication Protocol	RS232; RS485; Pulse train	
Weight	kg / 1.2	kg
Cooling Method	Forced-air cooling	
Rated Output Power	1000	W
Servo Drive AC Supply Voltage	1-phase 220 VAC -20%/+15%, 47-63 Hz	
Atmospheric Pressure	86-106 kPa	
Braking Absorption Voltage	380 ± 5	V DC

Technical Specifications

PARAMETER	SPECIFICATION	UNIT
ELECTRICAL		
Logic Supply Voltage	18 to 30 VDC, 1 A	
Peak Output Current	A / 15	A
Rated Output Power	1000	W
Servo Drive AC Supply Voltage	1-phase 220 VAC -20%/+15%, 47-63 Hz	
Protection Functions	Overvoltage, undervoltage, motor I ² T overtemperature, short-circuit and drive overtemperature protection	
Overvoltage Alarm Voltage	400 ± 5	V DC
Undervoltage Alarm Voltage	200 ± 5	V DC
Braking Absorption Voltage	380 ± 5	V DC
MECHANICAL		
Weight	kg / 1.2	kg
INTERFACES		
Communication Protocol	RS232; RS485; Pulse train	
Position-loop sampling frequency	1	kHz
Analog input sampling frequency	4	kHz
Input impedance	200 kΩ	

Technical Specifications


PARAMETER	SPECIFICATION	UNIT
INTERFACES		
Speed-loop sampling frequency	4	kHz
Current-loop sampling frequency	16	kHz
Input impedance	200 k Ω	
Input sampling frequency	4	kHz
ENVIRONMENTAL		
Cooling Method	Forced-air cooling	
Atmospheric Pressure	86-106 kPa	
Operating Temperature	0-40	°C
Relative humidity	5-95	% RH
Storage Temperature	-10 °C-70 °C	
SAFETY		
STO Support	No / false	
ADDITIONAL SPECIFICATIONS		
Continuous output current	4.6	A
Protection rating	IP20	
Supply voltage	1-phase 220 VAC -20%/+15%, 47-63 Hz	

Dimensional & Integration Overview


Mechanical Overview

PARAMETER	VALUE	UNIT
Weight	kg / 1.2	kg


Dimensional Drawings

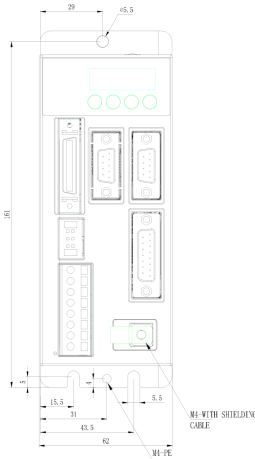

Mechanical View 1



Power Connector Pinout

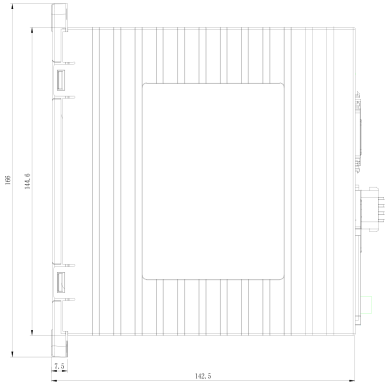

Mechanical View 3

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 1	Top mounting hole horizontal location	29 mm
	Top mounting hole diameter	Diameter 5.5 mm
	Overall body height	161 mm
	Lower left mounting slot end offset	5 mm
	Lower mounting slot hole or clearance size	5.5 mm
	Lower left mounting slot local width	15.5 mm
	Lower mounting feature spacing	31 mm
	Lower mounting feature span	43.5 mm
	Bottom overall width	62 mm
	Protective earth M4 connection	M4 protective earth connection
Mechanical View 3	Overall height	Overall height 166 mm
	Main body height	Main body height 144.6 mm
	Left-side protrusion or step width	Left-side protrusion or step width 7.5 mm
	Main body length	Main body length 142.5 mm

[View Product Online](#) [Request Engineering Data](#) [Request a Quote](#)

01 Specifications are subject to change without notice. Verify the current product configuration before final design release.

02 2D drawings, CAD files and integration documentation are controlled documents and are supplied separately on request.