

PRODUCT DATASHEET

ES-SM-A01-040S-TOP16NM-50W-003

AC Servo Motors


AC Servo Motors | ES-SM-A01-040S Standard 40 mm AC Servo Motor Series

Product Overview

AC Servo Motors with rated Torque 0.16 N·m, instantaneous Maximum Torque 0.48 N·m and rated Speed 3000 rpm.

Key Specifications

PARAMETER	VALUE	UNIT
Rated Torque	0.16	N·m
Instantaneous Maximum Torque	0.48	N·m
Rated Speed	3000	rpm
Continuous Rated Output Power	50	W
Instantaneous Maximum Current	2.25	A
Flange Size	40	mm
Torque Constant	0.232	N·m/A
Rated Voltage	220	V AC
Rated Line Voltage	220	V

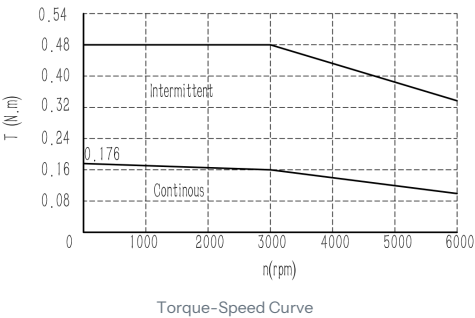

Technical Specifications

PARAMETER	SPECIFICATION	UNIT
PERFORMANCE		
Rated Torque	0.16	Nm
Instantaneous Maximum Torque	0.48	Nm
Rated Speed	3000	rpm
Continuous Rated Output Power	50	W
Torque Constant	0.232	Nm/A
Rated Power	50	W
ELECTRICAL		
Rated Voltage	220	V AC
Rated Line Voltage	220	V
Instantaneous Maximum Current	2.25	A
Back EMF Constant	0.018	V/krpm
Insulation Class	F	
Maximum Allowed Voltage Slew Rate	8	KV/ μ s
Motor Outlet Mode	Communication encoder socket	
Pole Pairs	5	
Rated Current	0.7	A

Technical Specifications


PARAMETER	SPECIFICATION	UNIT	NOTES
ELECTRICAL			
Rotational Back-EMF Constant	0.018	V/krpm	
Electrical Time Constant	1.14	ms	
Position Feedback Device	23-bit multi-turn communication optical absolute encoder		
MECHANICAL			
Flange Size	40	mm	
Inertia Level	Low inertia		
Holding Brake Available	Without holding brake		
Mechanical Time Constant	1.51	ms	Brake Configuration: without_brake
Rotor Inertia	0.018 kgcm ² / 0.018 Kg·cm ²		Brake Configuration: without_brake
Bearing Radial Force Capacity	120	N	
Bearing Axial Force Capacity	60	N	
ENVIRONMENTAL			
Altitude and Derating Rule	Maximum altitude 4000 m; above 1000 m, power derates 1.5% per 100 m		
Operating Environment	Keep away from corrosive or flammable gases, oil droplets and dust		
Operating Humidity	≤90% RH, non-condensing		
Operating Temperature	-20 to 40°C (no freezing)		
Protection Rating	IP65, shaft end IP54 (Note: with shaft-end oil seal IP54, without oil seal IP50)		

Dimensional & Integration Overview


Mechanical Overview

PARAMETER	VALUE	UNIT
Flange Size	40	mm
Inertia Level	Low inertia	
Holding Brake Available	Without holding brake	
Mechanical Time Constant	1.51	ms
Rotor Inertia	0.018 kgcm ² / 0.018 Kg·cm ²	
Bearing Radial Force Capacity	120	N


Dimensional Drawings

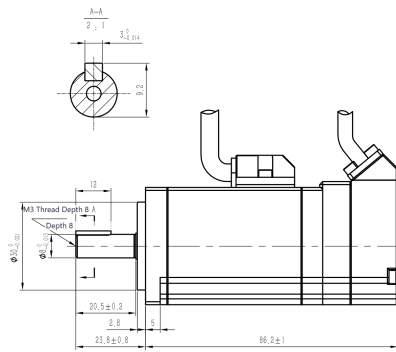


Mechanical View 1



Power Connector Pinout

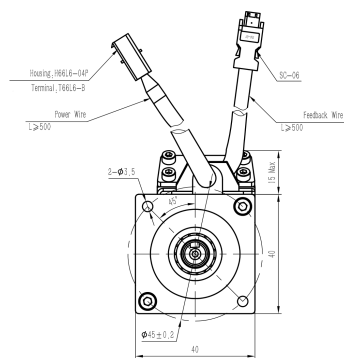

Mechanical View 3



Feedback Connector Pinout

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 1	Section view label	Section A-A
	Keyway width	3 mm, +0 / -0.014
	Keyway related height	9.2 mm
	Shaft end step length	12 mm
	M3 thread depth	M3 thread depth 8 mm
	Hole depth	Depth 8 mm
	Shaft shoulder diameter	Diameter 30 mm, +0 / -0.021
	Shaft end diameter	Diameter 8 mm, +0 / -0.013
	Shaft extension length	20.5 mm $\pm$ 0.2
	Small axial offset	2.8 mm
	Axial step length	5 mm
	Motor body length	86.2 mm $\pm$ 1
	Front end total axial length	23.8 mm $\pm$ 0.8

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 3	Maximum top protrusion height	15 mm maximum
	Mounting hole diameter and quantity	2 holes, diameter 3.5 mm
	Mounting hole angular spacing	45 degrees
	Mounting face vertical dimension	40 mm
	Mounting pilot circle diameter	Diameter 45 ± 0.2 mm
	Mounting face horizontal dimension	40 mm

[View Product Online](#) [Request Engineering Data](#) [Request a Quote](#)

01 Specifications are subject to change without notice. Verify the current product configuration before final design release.

02 2D drawings, CAD files and integration documentation are controlled documents and are supplied separately on request.