

PRODUCT DATASHEET

ES-SM-A01-060S-TOP64NM-200W-006

AC Servo Motors


AC Servo Motors | ES-SM-A01-060S Standard 60 mm AC Servo Motor Series

Product Overview

AC Servo Motors with rated Torque 0.64 Nm, instantaneous Maximum Torque 1.92 Nm and rated Speed 3000 rpm.

Key Specifications

PARAMETER	VALUE	UNIT
Rated Torque	0.64	N·m
Instantaneous Maximum Torque	1.92	N·m
Rated Speed	3000	rpm
Continuous Rated Output Power	200	W
Instantaneous Maximum Current	4.8	A
Flange Size	60	mm
Torque Constant	0.48	N·m/A
Rated Voltage	300	V AC
Rated Line Voltage	300	V

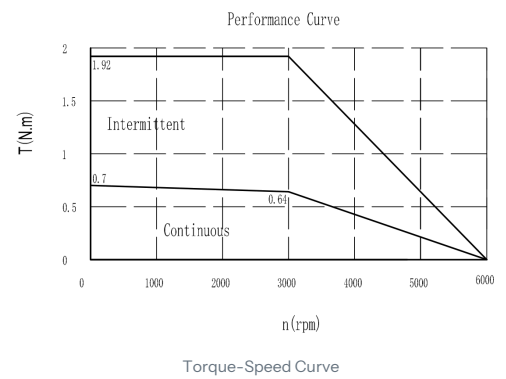

Technical Specifications

PARAMETER	SPECIFICATION	UNIT
PERFORMANCE		
Rated Torque	0.64	Nm
Instantaneous Maximum Torque	1.92	Nm
Rated Speed	3000	rpm
Continuous Rated Output Power	200	W
Rated Power	200	W
Torque Constant	0.48	Nm/A
ELECTRICAL		
Rated Voltage	300	V AC
Rated Line Voltage	300	V
Instantaneous Maximum Current	4.8	A
Insulation Class	F	
Maximum Allowed Voltage Slew Rate	8	KV/ μ s
Motor Outlet Mode	Communication encoder socket	
Pole Pairs	5	
Rated Current	1.5	A
Rotational Back-EMF Constant	29	V/krpm

Technical Specifications


PARAMETER	SPECIFICATION	UNIT	NOTES
ELECTRICAL			
Electrical Time Constant	1.9	ms	
Position Feedback Device	Single-turn communication optical encoder		
MECHANICAL			
Flange Size	60	mm	
Inertia Level	Low inertia		
Holding Brake Available	With holding brake		
Mechanical Time Constant	1.47 / 1.44	ms	Brake Configuration: without_brake
Rotor Inertia	0.204 kgcm ² / 0.2 Kg·cm ²		Brake Configuration: without_brake
Bearing Radial Force Capacity	180	N	
Bearing Axial Force Capacity	90	N	
ENVIRONMENTAL			
Altitude and Derating Rule	Maximum altitude 4000 m; above 1000 m, power derates 1.5% per 100 m		
Operating Environment	Keep away from corrosive or flammable gases, oil droplets and dust		
Operating Humidity	≤90% RH, non-condensing		
Operating Temperature	-20 to 40°C (no freezing)		
Protection Rating	IP65, shaft end IP54 (Note: with shaft-end oil seal IP54, without oil seal IP50)		
CONFIGURATION			
Output Shaft Type	Keyed shaft		

Dimensional & Integration Overview


Mechanical Overview

PARAMETER	VALUE	UNIT
Flange Size	60	mm
Inertia Level	Low inertia	
Holding Brake Available	With holding brake	
Mechanical Time Constant	1.47 / 1.44	ms
Rotor Inertia	0.204 kgcm ² / 0.2 Kg·cm ²	
Bearing Radial Force Capacity	180	N


Dimensional Drawings

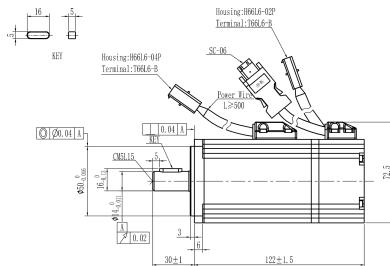


Mechanical View 1




Power Connector Pinout



Power Connector Pinout



Mechanical View 4



Feedback Connector Pinout

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 1	Key width	16 mm
	Keyway depth	5 mm
	Power wire minimum length	$L \geq 500$ mm
	Position tolerance	Position 0.04 relative to datum A
		Position 0.04 diameter relative to datum A
	Output shaft diameter	$\Phi 50\ 0/-0.016$ mm
	Shaft length	$16\ 0/-0.13$ mm
	Hole diameter	$\Phi 14\ 0/-0.011$ mm
	Datum A	
	Perpendicularity tolerance	Perpendicularity 0.02 relative to datum A
	Mounting spacing	3 mm
	Mounting slot width	6 mm
	Distance from shaft end to mounting face	30 ± 1 mm
	Overall length	122 ± 1.5 mm
	Center height	72.5 mm

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 4	Feedback Wire Label	Feedback Wire
	Brake Wire Label	Brake Wire
	Feedback Wire Minimum Length	$L \geq 500$
	Brake Wire Minimum Length	
	Mounting Hole Diameter and Quantity	4- $\phi 5.5$
	Mounting Hole Angular Distribution	45°
	Square Envelope Dimension	$\square 60$
	Circular Pitch Diameter with Tolerance	$\phi 70 \pm 0.1$

[View Product Online](#) [Request Engineering Data](#) [Request a Quote](#)

01 Specifications are subject to change without notice. Verify the current product configuration before final design release.

02 2D drawings, CAD files and integration documentation are controlled documents and are supplied separately on request.