

PRODUCT DATASHEET

ES-SM-A01-060S-TOP64NM-200W-007

AC Servo Motors


AC Servo Motors | ES-SM-A01-060S Standard 60 mm AC Servo Motor Series

Product Overview

AC Servo Motors with rated Torque 0.64 Nm, instantaneous Maximum Torque 1.92 Nm and rated Speed 3000 rpm.

Key Specifications

PARAMETER	VALUE	UNIT
Rated Torque	0.64	N·m
Instantaneous Maximum Torque	1.92	N·m
Rated Speed	3000	rpm
Continuous Rated Output Power	200	W
Instantaneous Maximum Current	4.8	A
Flange Size	60	mm
Torque Constant	0.48	N·m/A
Rated Voltage	300	V AC
Rated Line Voltage	300	V

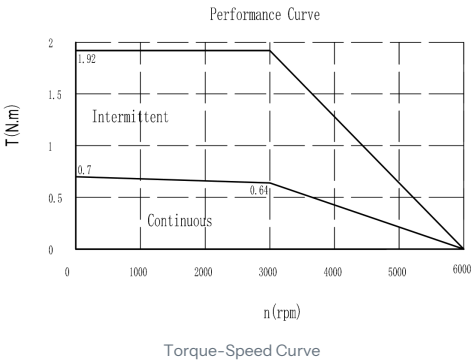

Technical Specifications

PARAMETER	SPECIFICATION	UNIT
PERFORMANCE		
Rated Torque	0.64	Nm
Instantaneous Maximum Torque	1.92	Nm
Rated Speed	3000	rpm
Continuous Rated Output Power	200	W
Rated Power	200	W
Torque Constant	0.48	Nm/A
ELECTRICAL		
Rated Voltage	300	V AC
Rated Line Voltage	300	V
Instantaneous Maximum Current	4.8	A
Insulation Class	F	

Technical Specifications

PARAMETER	SPECIFICATION	UNIT
ELECTRICAL		
Maximum Allowed Voltage Slew Rate	8	KV/ μ s
Motor Outlet Mode	Communication encoder socket	
Pole Pairs	5	
Rated Current	1.5	A
Rotational Back-EMF Constant	29	V/krpm
Electrical Time Constant	1.9	ms
Position Feedback Device	23-bit multi-turn communication optical absolute encoder	
MECHANICAL		
Flange Size	60	mm
Inertia Level	Low inertia	
Holding Brake Available	Without holding brake	

Technical Specifications

PARAMETER	SPECIFICATION	UNIT	NOTES
MECHANICAL			
Mechanical Time Constant	1.44	ms	Brake Configuration: without_brake
Rotor Inertia	0.2 kg·cm ² / 0.2 Kg·cm ²		Brake Configuration: without_brake
Bearing Radial Force Capacity	180	N	
Bearing Axial Force Capacity	90	N	
ENVIRONMENTAL			
Altitude and Derating Rule	Maximum altitude 4000 m; above 1000 m, power derates 1.5% per 100 m		
Operating Environment	Keep away from corrosive or flammable gases, oil droplets and dust		
Operating Humidity	≤90% RH, non-condensing		
Operating Temperature	-20 to 40°C (no freezing)		
Protection Rating	IP65, shaft end IP54 (Note: with shaft-end oil seal IP54, without oil seal IP50)		
CONFIGURATION			
Output Shaft Type	Keyed shaft		

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 1	Key width	5
	Key length	16
	Key label	KEY
	Left position tolerance	Position tolerance diameter 0.04 relative to datum A
	Upper geometric tolerance	Geometric tolerance 0.04 relative to datum A
	Shaft key label	KEY
	Shaft key dimension	5
	Shaft-end callout	CM5L15
	Body height	72.5
	Shaft diameter	Diameter 50 with +0/-0.016 tolerance
	Shaft step dimension	16 with +0/-0.13 tolerance
	Geometric tolerance value	0.02
Mechanical View 3	Mounting hole count and diameter	4 holes, diameter 5.5 mm
	Square flange side length	Square 60 mm
	Mounting bolt circle diameter	Diameter 70 mm ± 0.1 mm

[View Product Online](#)
[Request Engineering Data](#)
[Request a Quote](#)

01 Specifications are subject to change without notice. Verify the current product configuration before final design release.

02 2D drawings, CAD files and integration documentation are controlled documents and are supplied separately on request.