

PRODUCT DATASHEET

ES-SM-A01-130D-T4P78NM-1000W-003

AC Servo Motors


AC Servo Motors | ES-SM-A01-130D Standard 130 mm AC Servo Motor Series

Product Overview

AC Servo Motors with rated Torque 4.78 N·m, instantaneous Maximum Torque 14.34 N·m and rated Speed 2000 rpm.

Key Specifications

PARAMETER	VALUE	UNIT
Rated Torque	4.78	N·m
Instantaneous Maximum Torque	14.34	N·m
Rated Speed	2000	rpm
Continuous Rated Output Power	1000	W
Instantaneous Maximum Current	14.5 ref.)	A
Flange Size	130	mm
Torque Constant	1.21	N·m/A
Rated Voltage	320	V AC
Rated Line Voltage	320	V

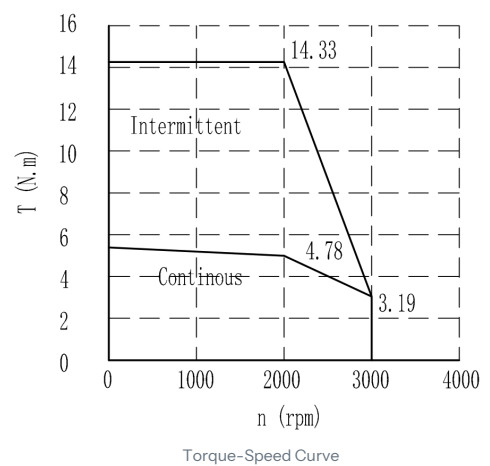

Technical Specifications

PARAMETER	SPECIFICATION	UNIT
PERFORMANCE		
Rated Torque	4.78	Nm
Instantaneous Maximum Torque	14.34	Nm
Rated Speed	2000	rpm
Continuous Rated Output Power	1000	W
Torque Constant	1.21	Nm/A
Bearing Axial Force	392	N
Bearing Radial Force	980	N
Rated Power	1000	W
ELECTRICAL		
Rated Voltage	320	V AC
Rated Line Voltage	320	V
Instantaneous Maximum Current	14.5 ref.)	A
Back EMF Constant	73.4 ref.)	V/krpm
Insulation Class	F	
Motor Outlet Mode	HFO21 + HFO18 aviation connectors	
Pole Pairs	5	

Technical Specifications


PARAMETER	SPECIFICATION	UNIT	NOTES
ELECTRICAL			
Rated Current	4.5 ref.)	A	
Maximum Allowed Voltage Slew Rate	8	KV/ μ s	
Rotational Back-EMF Constant	73.4 ref.)	V/krpm	
Electrical Time Constant	8.96	ms	
Position Feedback Device	17-bit multi-turn communication magnetic absolute encoder		
MECHANICAL			
Flange Size	130	mm	
Inertia Level	Medium inertia		
Holding Brake Available	Without holding brake		
Mechanical Time Constant	1.9	ms	Brake Configuration: without_brake
Rotor Inertia	10.6 kgcm ² / 10.6 Kg·cm ²		Brake Configuration: without_brake
Bearing Radial Force Capacity	980	N	
Bearing Axial Force Capacity	392	N	
ENVIRONMENTAL			
Altitude and Derating Rule	Maximum altitude 4000 m; above 1000 m, power derates 1.5% per 100 m		
Operating Environment	Keep away from corrosive or flammable gases, oil droplets and dust		
Operating Humidity	≤90% RH, non-condensing		

Dimensional & Integration Overview


Mechanical Overview

PARAMETER	VALUE	UNIT
Flange Size	130	mm
Inertia Level	Medium inertia	
Holding Brake Available	Without holding brake	
Mechanical Time Constant	1.9	ms
Rotor Inertia	10.6 kgcm ² / 10.6 Kg·cm ²	
Bearing Radial Force Capacity	980	N


Dimensional Drawings

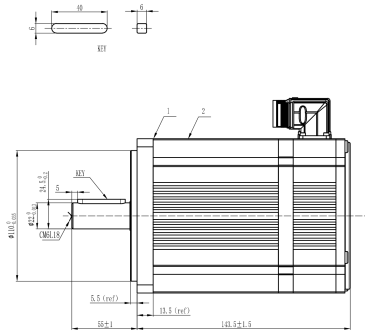


Mechanical View 1



Power Connector Pinout

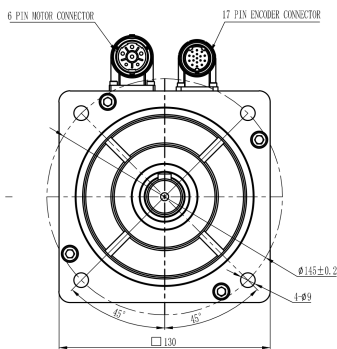

Mechanical View 3



Feedback Connector Pinout

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 1	Key length	Key length 40 mm
	Key width	Key width 6 mm
	Key height or thickness	Key height/thickness 6 mm
	Item callout 1	
	Item callout 2	
	Shaft key label	Key feature identified on shaft
	Shaft step or vertical height dimension	24.5 mm, +0/-0.2 mm
	Keyway end distance	Keyway end distance 5 mm
	Shaft diameter	Shaft diameter $\Phi 22$ mm, +0/-0.013 mm
	Outer diameter or envelope height	Outer diameter/envelope $\Phi 110$ mm, +0/-0.035 mm
	End threaded hole or thread length callout	CM6L18 thread/hole callout
	Reference clearance or offset	5.5 mm reference
	Reference mounting offset or shoulder length	13.5 mm reference
	Shaft extension length	Shaft extension length 55 mm ± 1 mm
	Motor body length	Motor body length 143.5 mm ± 1.5 mm

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 3	Mounting hole pitch circle diameter	Pitch circle diameter 145 ±0.2 mm
	Mounting hole quantity and diameter	4 holes, diameter 9 mm
	Left mounting hole angular position	45 degrees
	Right mounting hole angular position	
	Square flange outside dimension	Square flange 130 mm

[View Product Online](#) [Request Engineering Data](#) [Request a Quote](#)

01 Specifications are subject to change without notice. Verify the current product configuration before final design release.

02 2D drawings, CAD files and integration documentation are controlled documents and are supplied separately on request.