

PRODUCT DATASHEET

ES-SM-A01-130D-T9P55NM-2000W-003

AC Servo Motors


AC Servo Motors | ES-SM-A01-130D Standard 130 mm AC Servo Motor Series

Product Overview

AC Servo Motors with rated Torque 9.55 Nm, instantaneous Maximum Torque 28.65 Nm and rated Speed 2000 rpm.

Key Specifications

PARAMETER	VALUE	UNIT
Rated Torque	9.55	N·m
Instantaneous Maximum Torque	28.65	N·m
Rated Speed	2000	rpm
Continuous Rated Output Power	2000	W
Instantaneous Maximum Current	15 ref.)	A
Flange Size	130	mm
Torque Constant	2.1	N·m/A
Rated Voltage	560	V AC
Rated Line Voltage	560	V

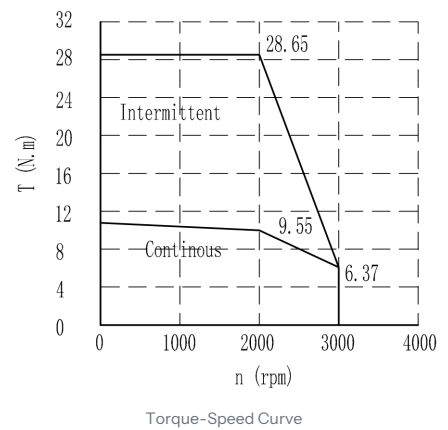

Technical Specifications

PARAMETER	SPECIFICATION	UNIT
PERFORMANCE		
Rated Torque	9.55	Nm
Instantaneous Maximum Torque	28.65	Nm
Rated Speed	2000	rpm
Continuous Rated Output Power	2000	W
Torque Constant	2.1	Nm/A
Bearing Axial Force	392	N
Bearing Radial Force	980	N
Rated Power	2000	W
ELECTRICAL		
Rated Voltage	560	V AC
Rated Line Voltage	560	V
Instantaneous Maximum Current	15 ref.)	A
Back EMF Constant	126.5 ref.)	V/krpm
Insulation Class	F	
Motor Outlet Mode	HFO21 + HFO18 aviation connectors	
Pole Pairs	5	

Technical Specifications


PARAMETER	SPECIFICATION	UNIT	NOTES
ELECTRICAL			
Rated Current	4.75 ref.)	A	
Maximum Allowed Voltage Slew Rate	12	KV/ μ s	
Rotational Back-EMF Constant	126.5 ref.)	V/krpm	
Electrical Time Constant	9.69	ms	
Position Feedback Device	Single-turn communication magnetic encoder		
MECHANICAL			
Flange Size	130	mm	
Inertia Level	Medium inertia		
Holding Brake Available	With holding brake		
Mechanical Time Constant	1.61 / 1.53	ms	Brake Configuration: without_brake
Rotor Inertia	21.25 kg $\cdot$ cm ² / 20.25 Kg $\cdot$ cm ²		Brake Configuration: without_brake
Bearing Radial Force Capacity	980	N	
Bearing Axial Force Capacity	392	N	
ENVIRONMENTAL			
Altitude and Derating Rule	Maximum altitude 4000 m; above 1000 m, power derates 1.5% per 100 m		
Operating Environment	Keep away from corrosive or flammable gases, oil droplets and dust		
Operating Humidity	$\leq$ 90% RH, non-condensing		

Dimensional & Integration Overview


Mechanical Overview

PARAMETER	VALUE	UNIT
Flange Size	130	mm
Inertia Level	Medium inertia	
Holding Brake Available	With holding brake	
Mechanical Time Constant	1.61 / 1.53	ms
Rotor Inertia	21.25 kg·cm ² / 20.25 Kg·cm ²	
Bearing Radial Force Capacity	980	N


Dimensional Drawings

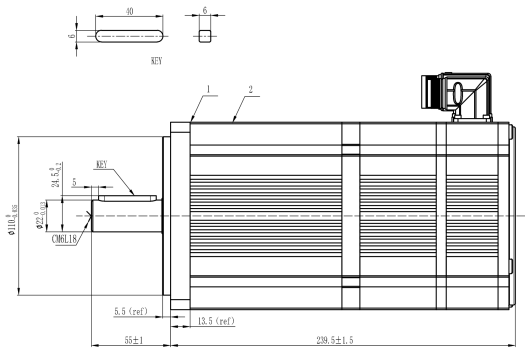


Mechanical View 1



Power Connector Pinout

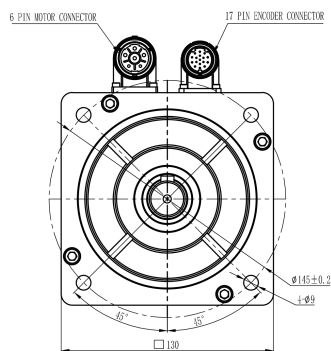

Mechanical View 3



Feedback Connector Pinout

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 1	Key width	6
	Key length	40
	Key height	6
	Key feature label	KEY
	Item label 1	Item 1
	Item label 2	Item 2
	Shaft keyway label	KEY
	Shaft/keyway vertical locating dimension	24.5 +0/-0.2
	Shaft keyway width	5
	Shaft diameter	Diameter 22 +0/-0.013
	Mounting flange diameter	Diameter 110 +0/-0.035
	Shaft-end thread or center-hole specification	CM6L18
	Reference axial offset	5.5 reference
	Reference axial step length	13.5 reference
	Motor body length	239.5 ±1.5
	Shaft extension length	55 ±1

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 3	Mounting hole pitch circle diameter	Pitch circle diameter $\phi 145 \pm 0.2$
	Mounting hole quantity and diameter	4 holes, diameter $\phi 9$
	Mounting hole angular position	45 degree angular spacing/reference position
	Square flange outside size	Square 130 flange size

[View Product Online](#) [Request Engineering Data](#) [Request a Quote](#)

01 Specifications are subject to change without notice. Verify the current product configuration before final design release.

02 2D drawings, CAD files and integration documentation are controlled documents and are supplied separately on request.