

PRODUCT DATASHEET

ES-SM-A03-080D-T2P39NM-750W-001

AC Servo Motors


AC Servo Motors | ES-SM-A03-080D Compact 80 mm AC Servo Motor Series

Product Overview

AC Servo Motors with rated Torque 2.39 N·m, instantaneous Maximum Torque 7.17 N·m and rated Speed 3000 rpm.

Key Specifications

PARAMETER	VALUE	UNIT
Rated Torque	2.39	Nm
Instantaneous Maximum Torque	7.17	Nm
Rated Speed	3000	rpm
Continuous Rated Output Power	750	W
Rated Voltage	220	V AC
Instantaneous Maximum Current	12.7	A
Flange Size	80	mm
Altitude and Derating Rule	highest altitude2000m(1000mfor each increase above100m,Power drop1.5%)	
Bearing Axial Force Capacity	147	N

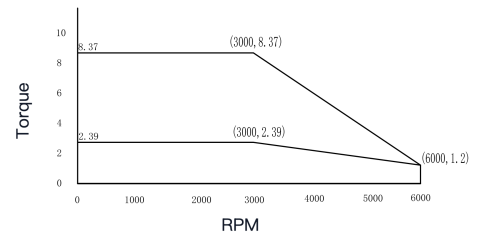

Torque-Speed Curve

Technical Specifications

PARAMETER	SPECIFICATION	UNIT
PERFORMANCE		
Rated Torque	2.39	N·m
Instantaneous Maximum Torque	7.17	N·m
Rated Speed	3000	rpm
Continuous Rated Output Power	750	W
Rated Power	750	W
Torque Constant	0.64	N·m/A
ELECTRICAL		
Rated Voltage	220	V AC
Instantaneous Maximum Current	12.7	A
Insulation Class	F	
Motor Outlet Mode	Standard socket	
Pole Pairs	5	
Rated Current	4	A
Rotational Back-EMF Constant	39	V/krpm
Electrical Time Constant	3.59	ms
Position Feedback Device	17-bit multi-turn communication magnetic absolute encoder	

Technical Specifications


PARAMETER	SPECIFICATION	UNIT	NOTES
MECHANICAL			
Flange Size	80	mm	
Inertia Level	Medium inertia		
Holding Brake Available	Without holding brake		
Mechanical Time Constant	0.88	ms	Brake Configuration: without_brake
Rotor Inertia	1.8 / 1.65	Kg·cm ²	Brake Configuration: without_brake
Bearing Radial Force Capacity	392	N	
Bearing Axial Force Capacity	147	N	
ENVIRONMENTAL			
Altitude and Derating Rule	highest altitude 2000m (1000m for each increase above 100m, Power drop 1.5%)		
Operating Environment	Keep away from corrosive or flammable gases, oil droplets and dust		
Operating Humidity	≤90% RH, non-condensing		
Operating Temperature	-20 to 40°C (no freezing)		
Protection Rating	IP65, shaft end IP54 (Note: with shaft-end oil seal IP54, without oil seal IP50)		
CONFIGURATION			
Output Shaft Type	Keyed shaft		
ADDITIONAL SPECIFICATIONS			
Holding Brake	false		
Cooling Method	Totally enclosed, self-cooled		

Dimensional & Integration Overview


Mechanical Overview

PARAMETER	VALUE	UNIT
Flange Size	80	mm
Inertia Level	Medium inertia	
Holding Brake Available	Without holding brake	
Mechanical Time Constant	0.88	ms
Rotor Inertia	1.8 / 1.65	Kg·cm ²
Bearing Radial Force Capacity	392	N


Dimensional Drawings

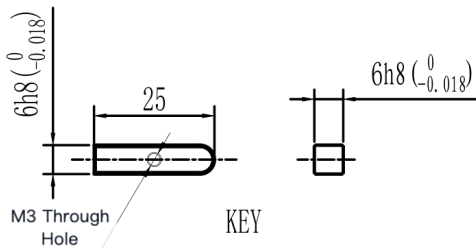


Mechanical View 1

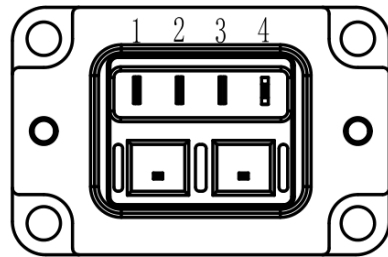


Power Connector Pinout



Mechanical View 3



Mechanical View 4

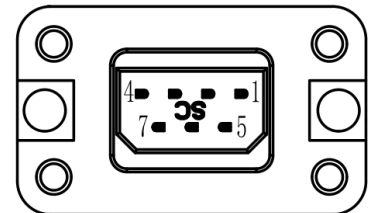

Feedback Connector Pinout

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 1	Key width tolerance	6 h8, upper deviation 0, lower deviation -0.018
	Key slot length	25
	M3 through hole	
	Key feature label	Key
Mechanical View 3	Left-side dimension with tolerance	15.5 mm, +0 / -0.1 mm
	Mounting hole angular positioning	45 degrees
	Mounting hole pitch circle diameter	Diameter 90 mm
	Mounting hole quantity and diameter	4 holes, diameter 6.5 mm
	Square flange outside size	Square 80 mm

2D Drawing Dimensions & Callouts

VIEW	FIELD	VALUE
Mechanical View 4	Keyway label	Keyway present
	Threaded hole specification	M6 thread, length/depth 20
	Shaft shoulder diameter and tolerance	Diameter 70 h7, +0/-0.03
	Geometric tolerance relative to datum A	Cylindrical/geometric tolerance diameter 0.04 relative to datum A
	Shaft end length and tolerance	Length 21.5, +0/-0.2
	Datum A	Datum feature A
	Reference overall height	Reference dimension 95.5
	Reference clearance or step dimension	Reference dimension 0.5
	Mounting-side step dimension	8
	Output shaft diameter and tolerance	Diameter 19 h6, +0/-0.013
	Mounting step width	3 ±0.3
	Perpendicularity tolerance relative to datum A	Perpendicularity 0.06 relative to datum A
	Geometric tolerance value relative to datum A	Geometric tolerance 0.02 relative to datum A
	Shaft end to mounting reference distance	35 ±1
	Main body length	95 ±1

[View Product Online](#) [Request Engineering Data](#) [Request a Quote](#)

01 Specifications are subject to change without notice. Verify the current product configuration before final design release.

02 2D drawings, CAD files and integration documentation are controlled documents and are supplied separately on request.