

ENGINEERING DOCUMENTATION

Slotted Brushless DC Motor

Dimensional & Integration Guide

DOCUMENT	REVISION / ISSUE	STATUS
DIG-ES-DC-SL02-M001	DRAFT-08 / 28 Aug 2026	Engineering Integration Reference

Integration Overview


Compact electric motor for specified rotary actuation. This guide supports mounting, shaft, load-path, drive, thermal, cable and commissioning planning for ES-DC-SL02-M001.

Key Integration Facts

INTEGRATION ITEM	VALUE
Rated Torque	0.019 Nm
Rated Speed	10000 rpm
Torque Constant	0.016 Nm/A
Continuous Rated Output Power	19.9 W
Instantaneous Maximum Torque	0.057 Nm
No-Load Rotational Speed	12000 rpm
Cogging Torque	3.42 Nm
Pole Pairs	2

3D Orientation Reference

This axonometric reference provides a quick orientation check for the motor or actuator body, output interface and mounting relationship of ES-DC-SL02-M001.

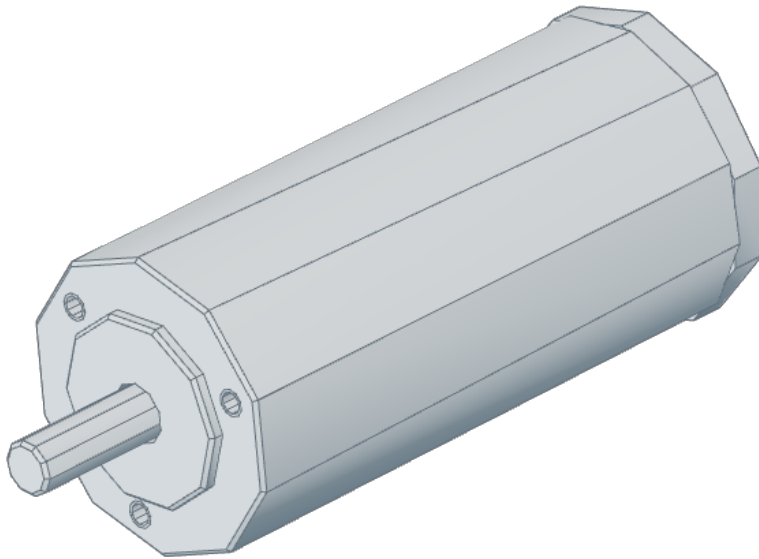

Axonometric Orientation View


Orientation reference only. Use the exact-SKU parameter table and mechanical drawing for dimensions, hole geometry, fits and machining decisions.

Exact-SKU Interface Cross-Reference


INTEGRATION TOPIC	EXACT-SKU REFERENCE
Motor envelope and output orientation	Body Length: 48 mm. Confirm interface geometry, fits and installation details in the exact-SKU mechanical drawing.
Drive and motion boundaries	Rated Voltage: 24 V; Continuous Rated Current: 1.2 A; Rated Torque: 0.019 Nm; Rated Speed: 10000 rpm. Confirm interface geometry, fits and installation details in the exact-SKU mechanical drawing.
Installed load and thermal reference	Rotor Inertia: 1.1 kgcm ² ; Duty Cycle: S2 . Confirm interface geometry, fits and installation details in the exact-SKU mechanical drawing.

Product Structure & Views

These views present product structure, mounting interfaces and relevant integration geometry for this SKU.

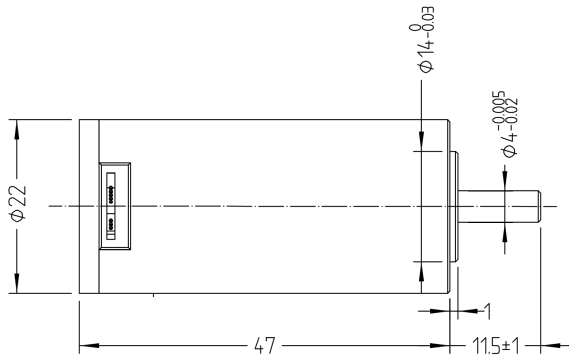

Mechanical View 1

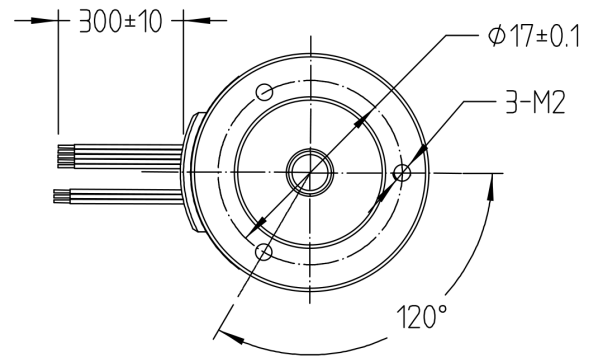

Mechanical View 2

VIEW	FIELD	VALUE
Mechanical View 1	Shaft shoulder diameter	Diameter 14 mm, upper deviation 0 mm, lower deviation -0.03 mm
	Output shaft diameter	Diameter 4 mm, upper deviation -0.005 mm, lower deviation -0.02 mm
	Motor body diameter	Diameter 22 mm
	Motor body length	47 mm
	Output shaft protrusion length	11.5 mm ± 1 mm
Mechanical View 2	Motor front mounting flange length	300 ± 10 mm
	Front flange mounting hole circle diameter	17 ± 0.1 mm
	Front flange mounting hole specification and quantity	3 × M2 threaded holes
	Mounting hole angular distribution	120° angular spacing

Technical Specifications

PARAMETER	VALUE	UNIT
Rated Torque	0.019	Nm
Rated Speed	10000	rpm
Torque Constant	0.016	Nm/A
Continuous Rated Output Power	19.9	W
Instantaneous Maximum Torque	0.057	Nm
No-Load Rotational Speed	12000	rpm
Cogging Torque	3.42	Nm
Pole Pairs	2	
Instantaneous Maximum Current	3.6	A
Rotational Back-EMF Constant	1.67	V/krpm
Continuous Rated Current	1.2	A
Dielectric strength	500VAC/1KHz/1mA/1s	
Insulation Resistance	100 MOhm 20C	
Position Feedback Device		
No-load Current	0.24	A
Rated Voltage	24	V

Technical Specifications - Continued

PARAMETER	VALUE	UNIT
Rotor Inertia	1.1	kgcm ²
Body Length	48	mm
Frame size	22	
Winding connection		
Housing shape	Round	
Noise	≤0	dB
Commutation angle	120°	°
Housing-to-Ambient Thermal Resistance	0.85	K/W
Motor efficiency	70	%
Line resistance	3.053	Ω
Maximum Winding Temperature	75	°C
Housing Type	Aluminum housing	
Line inductance	0.54	mH
Ambient temperature	25	°C
Duty Cycle	S2	
Motor Weight	67.7	g

Mounting, Shaft and Load Path

- Support the complete mounting face, preserve locating features and verify fastener engagement without distorting the housing.
- Align the shaft and coupling before tightening, and validate radial load, axial load, overhung distance, belt tension, inertia and shock for the installed mechanism.

Drive, Electrical and Motion Integration

- Coordinate supply, drive current limit, speed, torque and fault protection with the actual load and duty cycle.
- Use applicable wiring data for conductor identity, polarity, phase pairing, shielding and grounding; do not infer these from the product view.

Thermal, Cable and Commissioning Conditions

- Validate housing and winding temperature over the intended operating cycle, ambient condition, mounting heat path and enclosure airflow.
- Provide strain relief and service clearance, then commission at reduced energy and verify direction, current limits, motion response, temperature and fault behavior.

Integration Checklist

- | | |
|----|---|
| 01 | Confirm the exact-SKU drawing and parameter set. |
| 02 | Verify mounting geometry, locating features, shaft engagement, coupling alignment and service clearance. |
| 03 | Validate torque, speed, inertia, radial and axial loads, overhung distance and shock. |
| 04 | Set drive, current, motion, wiring, grounding and thermal boundaries from applicable product documentation. |
| 05 | Commission at reduced energy and verify direction, motion response, temperature and fault behavior. |

[View SKU Product Datasheet](#) [Request controlled 2D drawing](#) [Request controlled STEP review](#) [Request a Quote](#)

Engineering Use and Verification Notice

01. This Dimensional & Integration Guide applies only to EmbodyStack SKU ES-DC-SL02-M001 and is intended for dimensional evaluation and preliminary integration. It is not a applicable manufacturing drawing, motor or actuator application approval, wiring definition, drive-selection approval, machinery risk assessment, safety validation or production authorization. Before design freeze, installation or energization, verify all dimensions, mounting and locating features, moving envelopes, shaft or output geometry, permissible loads, alignment, supply and current limits, wiring, motion profile, duty cycle, thermal condition, cable routing, environmental boundaries, maintenance and fault response against the applicable EmbodyStack engineering data for this exact SKU. Validate the complete installed system under intended operating and fault conditions.