

ENGINEERING DOCUMENTATION

Compact-Profile Hollow Magnetic Encoder

Dimensional & Integration Guide

DOCUMENT	REVISION / ISSUE	STATUS
DIG-ES-EN-C13-S025-B53	DRAFT-08 / 25 Aug 2026	Engineering Integration Reference

Integration Overview


Compact hollow absolute magnetic encoder for high-speed rotary position feedback. This guide supports rotor and stator interface planning, concentricity and axial-gap control, power and signal integration, protocol selection, environmental and commissioning for ES-EN-C13-S025-B53.

Key Integration Facts

INTEGRATION ITEM	PUBLISHED VALUE
Maximum Rotation Speed	>20000 rpm
Update Frequency	27 kHz
Angle Resolution Options	16 or 17 bit
Repeatable Accuracy	0 to ±1 bit
Angular Accuracy	±0.05 °
Power Supply	4.5 to 5.5 V
Overall Thickness	7 mm
Rotor Inner Diameter	53 mm
Stator Outer Diameter	72 mm
Operating Temperature Options	-40 to 85; -40 to 105; -40 to 125 °C

Annotated 3D Orientation and Interface Views

Orthographic 3D views identify the product body, primary interface and mounting relationships for ES-EN-C13-S025-B53.

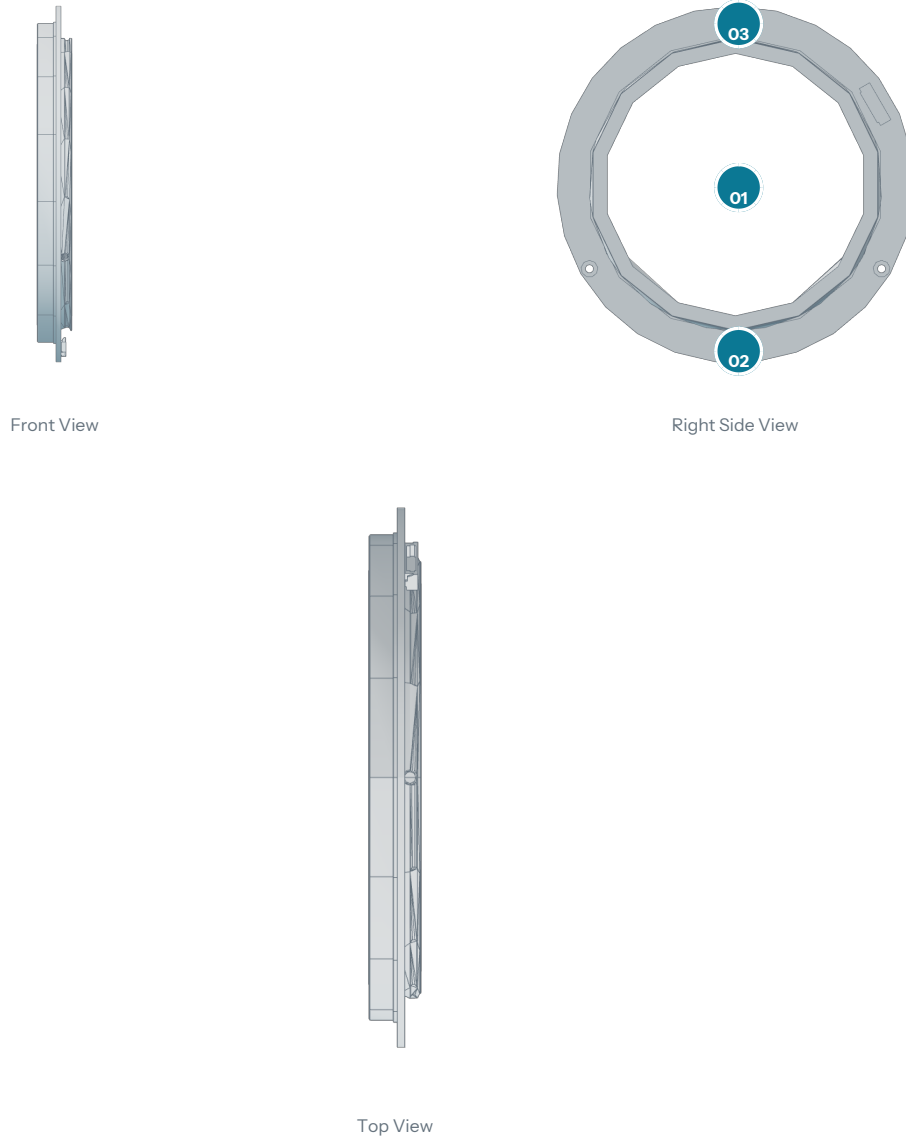




Numbered references identify the principal interfaces used by the integration sections.

Functional Callout Schedule

REF.	VIEW	INTEGRATION REFERENCE
01	Right Side View	Rotor and stator body envelope
02		Electrical interface and cable exit
03		Mounting locating hole pattern

Product Structure & Views

These views present the selected product structure, mounting interfaces and relevant integration geometry for this configuration.

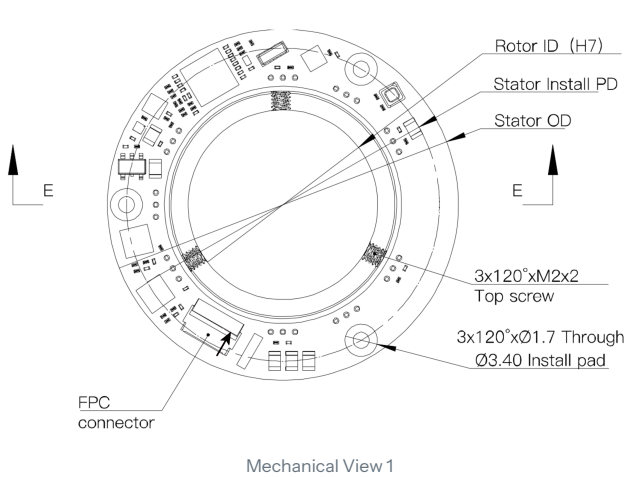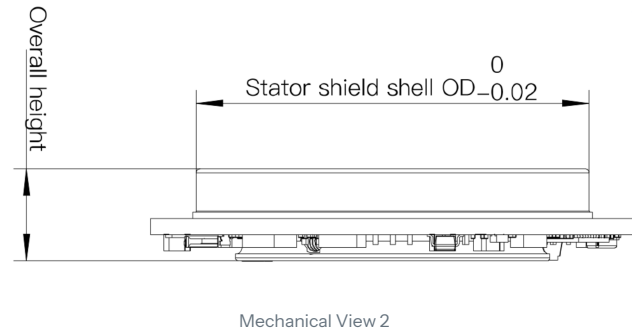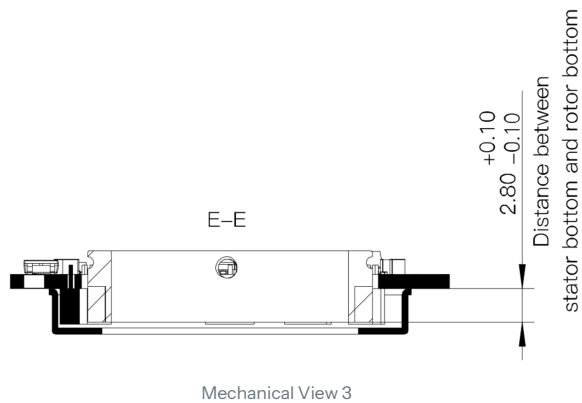

Overall Dimensions and Mounting Interface

PARAMETER	PUBLISHED VALUE	UNIT
Overall Thickness	7	mm
Series Size	55	mm class
Rotor Inner Diameter	53	mm
Stator Mounting Pitch Diameter	68	mm
Stator Shield Outer Diameter	65	mm
Stator Outer Diameter	72	mm
Mechanical Configuration	Compact	
Installation Method	Axial hollow	

- Confirm the selected configuration and applicable product documentation before using interface geometry.
- Locate the stator and rotor from their specified cylindrical datums; do not use fasteners to correct runout or misalignment.
- Control concentricity, axial position, rotor insertion direction and operating air gap throughout assembly.

Rotor, Stator and Magnetic Alignment

PARAMETER	PUBLISHED VALUE	UNIT
Rotor Inner Diameter	53	mm
Stator Shield Outer Diameter	65	mm
Angular Accuracy	± 0.05	°
Repeatable Accuracy	0 to ± 1	bit

- Keep the rotor within the approved stator shield envelope and prevent contact over the full runout and thermal range.
- Protect the calibrated rotor-stator pairing from substitution, strong external magnetic fields, impact and metallic debris.
- After assembly, rotate at low speed and verify direction, runout, signal continuity, error status and repeatability.

Speed, Resolution and Accuracy Boundaries

PARAMETER	PUBLISHED VALUE	UNIT
Maximum Rotation Speed	>20000	rpm
Update Frequency	27	kHz
Angle Resolution Options	16 or 17	bit
Repeatable Accuracy	0 to ± 1	bit
Temperature Drift	± 0.01	$^{\circ}$ per 3°C
Angular Accuracy	± 0.05	$^{\circ}$

- Treat maximum rotation speed as a component boundary; validate shaft dynamics, balance, retention and temperature in the installed system.
- Select angle resolution and update frequency with the controller timing, latency and protocol configuration.
- Installed accuracy also depends on runout, concentricity, axial gap, temperature and calibration integrity.

Power, Signal and Protocol Integration

PARAMETER	PUBLISHED VALUE	UNIT
Power Supply	4.5 to 5.5	V
Current Consumption	approximately 60	mA
Startup Time	15	ms
Supported Output Interfaces	SSI; BiSS-C; RS485; RS422; T485; BUS; PERIOD	
Battery Supply	2.7 to 3.6	V
Battery Mode Current	approximately 35	μA

- Select one selected output interface and use its current pin assignment, termination, timing and CRC rules.
- Provide regulated power, return, shielding and grounding compatible with the controller and cable length.
- Battery supply applies only to a compatible battery multi-turn configuration; verify polarity, service life, isolation and fault handling.

Cable, EMC and Status Handling

- Route differential signals as differential pairs and keep them separated from motor phase and switching-power conductors.
- Terminate the cable shield according to the system grounding architecture and prevent cable force from loading the encoder.
- Map warning, error, battery, magnetic-field, temperature and overspeed status into commissioning and machine fault handling.

Environmental and Service Conditions

PARAMETER	PUBLISHED VALUE	UNIT
Operating Temperature Options	-40 to 85; -40 to 105; -40 to 125	°C

- Confirm the ordered temperature option and validate temperature at the installed stator and nearby drive components.
- Prevent oil, dust, metallic particles, condensation and cleaning residue from entering the rotor-stator gap and connector.
- Stop and inspect after impact, rotor contact, abnormal runout, magnetic contamination, overspeed or repeated status faults.

Integration Checklist

- 01 Confirm the exact SKU, interface drawing and selected encoder configuration.
- 02 Verify rotor and stator diameters, mounting pitch, axial position, concentricity and operating gap.
- 03 Confirm shaft shoulder, rotor retention, fasteners and full-speed mechanical integrity.
- 04 Select one selected protocol and verify pin assignment, termination, timing, CRC and status mapping.
- 05 Verify regulated power, current, battery configuration, grounding, shielding and cable strain relief.
- 06 At low speed verify direction, absolute position, repeatability, warning and error behavior.
- 07 Validate speed, update rate, accuracy and temperature over the complete duty cycle.
- 08 Protect the magnetic gap and connector from contamination, impact and strong external fields.
- 09 Include specified 2D, STEP, pinout, protocol and installation data in integration planning.

[View SKU Product Datasheet](#) [Request controlled 2D drawing](#) [Request controlled STEP review](#) [Request a Quote](#)

Engineering Use and Verification Notice

01. This Dimensional & Integration Guide applies only to EmbodyStack SKU ES-EN-C13-S025-B53 and is intended for dimensional evaluation and preliminary integration. It is not a applicable manufacturing drawing, encoder selection approval, shaft or rotor retention approval, wiring final integration, calibration certificate, machinery risk assessment, safety validation or integration planning document. Before design freeze, assembly or commissioning, verify dimensions, fits, datums, concentricity, runout, axial gap, rotor retention, speed, resolution, accuracy, power, protocol, pinout, termination, grounding, shielding, status handling, temperature, contamination and fault response against the applicable EmbodyStack engineering data for this exact SKU and ordered configuration. Where this guide and applicable product documentation differ, the applicable product documentation governs. Validate the complete encoder, shaft, motor, controller, cable, host structure and machine under intended operating, fault, environmental and regulatory conditions.