ENGINEERING DOCUMENTATION

Frameless Torque Motor

Dimensional & Integration Guide

DOCUMENT	REVISION / ISSUE	STATUS
DIG-ES-FM-H01-OD070-T0P66NM-001	DRAFT-08 / 27 Aug 2026	Engineering Integration Reference

Integration Overview

Frameless torque motor for direct integration into a host rotary assembly. This guide supports rotor-stator alignment, air-gap control, bearing and load-path design, thermal extraction, electrical integration and staged commissioning.

Key Integration Facts

INTEGRATION ITEM	PUBLISHED VALUE
Rated Torque	0.66 N·m
Rated Speed	3650 rpm
Weight	0.23 kg

Product Structure & Views

These views present product structure, mounting interfaces and relevant integration geometry for this SKU.

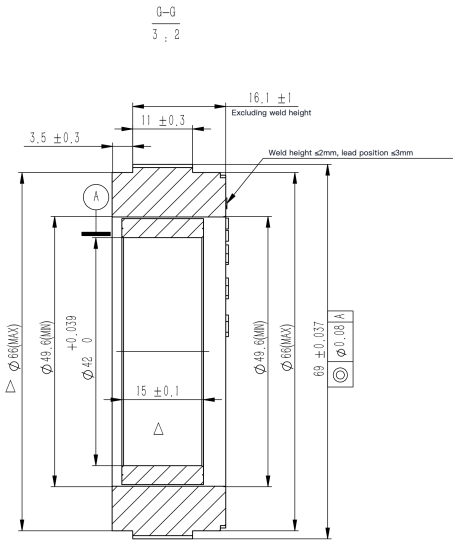

Mechanical View 1

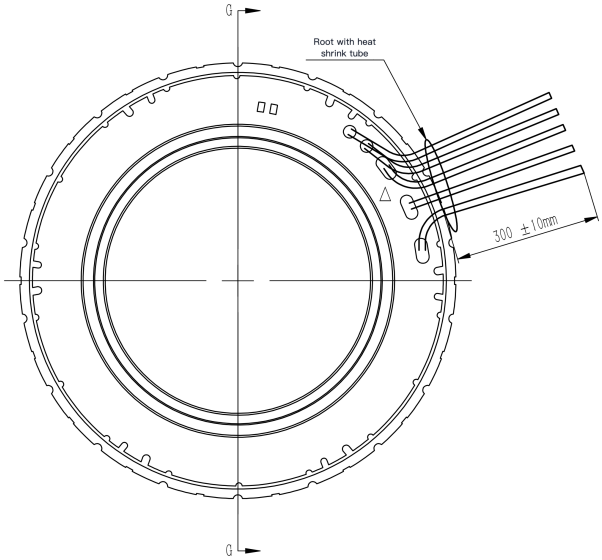

Mechanical View 2

VIEW	FIELD	VALUE
Mechanical View 1	Section view identifier	Section G-G
	View scale	Scale 3:2
	End dimension excluding weld height	16.1 ±1 excluding weld height
	Upper step width	11 ±0.3
	Left end offset dimension	3.5 ±0.3
	Weld height and lead position limits	Weld height ≤2 mm; lead position ≤3 mm
	Datum A	Datum A
	Left maximum outside diameter	Diameter 66 maximum
	Left minimum diameter	Diameter 49.6 minimum
	Bore diameter with unilateral tolerance	Diameter 42 +0.039/0
	Right minimum diameter	Diameter 49.6 minimum
	Right maximum outside diameter	Diameter 66 maximum
	Overall axial dimension	69 ±0.037
	Geometric tolerance relative to datum A	Geometric tolerance diameter 0.08 relative to datum A
	Internal horizontal dimension	15±0.3
Mechanical View 2	Section indicator G-G	Section/cutting-plane indicator G-G
	Root heat shrink tube note	Root area with heat shrink tube
	Cable extension length	Cable length 300 ±10 mm

Overall Dimensions and Mounting Interface

- Confirm the stator, rotor, bore, axial stack, locating and retention geometry against the applicable exact-SKU drawing.
- The host housing and shaft must provide the required datum control without distorting the active motor components.

Rotor, Stator and Air-Gap Alignment

- Control concentricity, axial position, runout and operating air gap through the complete tolerance and temperature range.
- Prevent contact, magnetic debris, impact and assembly forces from damaging the rotor or stator.

Bearing, Load Path and Retention

PARAMETER	PUBLISHED VALUE	UNIT
Rotor Inertia	0.24	kg·cm²
Weight	0.23	kg

- The host bearing system must carry radial, axial and moment loads; do not infer bearing capability from motor torque or diameter.
- Provide positive rotor retention and verify overspeed, imbalance, shock and fault torque cases.

Electrical and Feedback Integration

PARAMETER	PUBLISHED VALUE	UNIT
Torque Constant	0.116	N·m/A

- Match the winding, drive current, voltage, commutation and feedback system to the exact SKU.
- Use current phase, sensor and insulation definitions; do not infer pin or phase identity from this guide.

Thermal Path and Duty Cycle

PARAMETER	PUBLISHED VALUE	UNIT
Rated Torque	0.66	N·m

- Design a verified heat path from the stator into the host structure and validate temperatures under the intended duty cycle.
- Peak torque and current are transient boundaries and require coordinated drive protection.

Assembly and Commissioning Validation

PARAMETER	PUBLISHED VALUE	UNIT
Rated Speed	3650	rpm
Rated Torque	0.66	N·m

- Check free rotation, air gap, retention, insulation and sensor alignment before energization.
- Commission at low energy, confirm commutation and direction, then validate the complete joint through intended load and fault cases.

Integration Checklist

01	Confirm the exact SKU, 2D package and applicable assembly data.
02	Verify stator, rotor, bore, stack, datums, retention and operating air gap.
03	Validate host bearings, shaft, housing stiffness, runout and thermal growth.
04	Confirm winding, drive, feedback, commutation and insulation compatibility.
05	Establish and validate the stator-to-housing thermal path.
06	Check free rotation and insulation before low-energy commissioning.
07	Validate full load, speed, temperature and credible fault cases.

View SKU Product Datasheet Request controlled 2D drawing Request controlled STEP review Request a Quote

Engineering Use and Verification Notice

01. This Dimensional & Integration Guide applies only to EmbodyStack SKU ES-FM-H01-OD070-T0P66NM-001 and is intended for dimensional evaluation and preliminary integration. It is not a applicable manufacturing drawing, wiring definition, application approval, machinery risk assessment, safety validation or integration planning document. Before design freeze, machining, wiring or energization, verify all dimensions, tolerances, mounting and locating features, load boundaries, electrical interfaces, thermal conditions, cabling, grounding, protection, commissioning and applicable regulatory requirements against the applicable EmbodyStack engineering data for this exact SKU. Where this guide and applicable product documentation differ, the applicable product documentation governs. Validate the complete installed system under intended duty cycles, loads, accelerations, environmental conditions and credible fault cases.