

ENGINEERING DOCUMENTATION

Lightweight Cup Unit Type I

Dimensional & Integration Guide

DOCUMENT	REVISION / ISSUE	STATUS
DIG-ES-HG-S11-F17-R120	DRAFT-08 / 28 Aug 2026	Engineering Integration Reference

Integration Overview


Lightweight Cup Unit Type I for compact, coaxial, high-ratio rotary-axis integration. This guide supports interface planning, mounting alignment, duty validation, torsional behavior, lubrication, sealing and commissioning for ES-HG-S11-F17-R120.

Key Integration Facts


INTEGRATION ITEM	VALUE
Rated Torque	24 Nm
Instantaneous Maximum Torque	86 Nm
Start/Stop Peak Torque	54 Nm
Backlash	±0 arc sec
Reduction Ratio	120
Maximum Input Speed	7300 r/min
Frame Size	17
Weight	0.52 kg

Product Structure & Views


These views present the selected product structure, mounting interfaces and relevant integration geometry for this SKU.

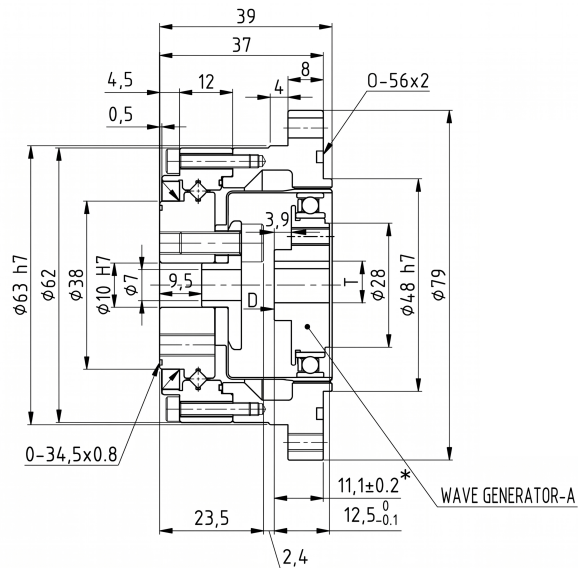


Mechanical View 1

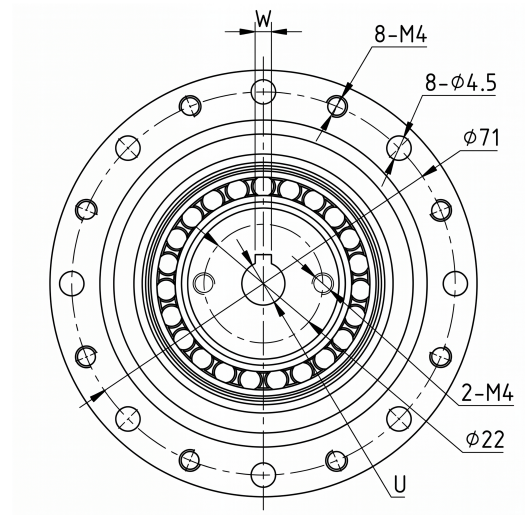

Mechanical View 2

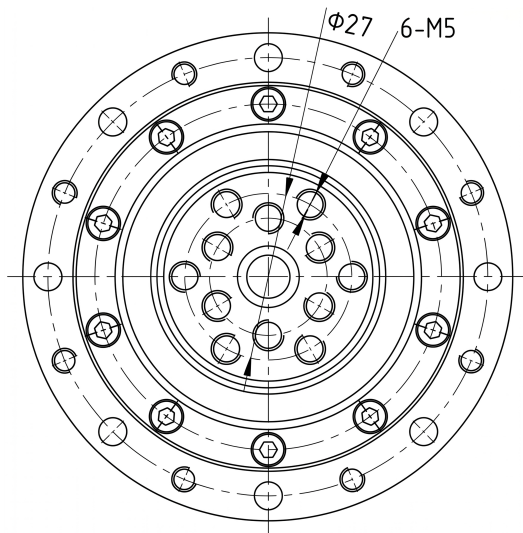

Mechanical View 3

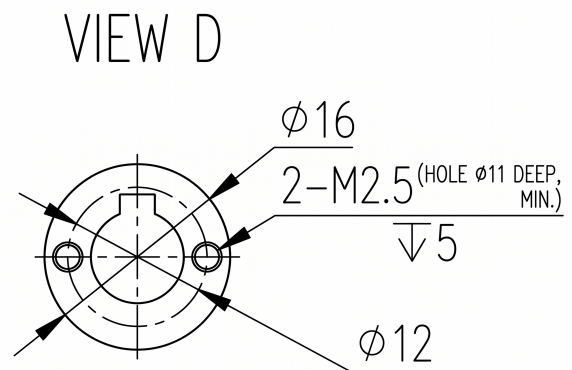

Mechanical View 4

VIEW	FIELD	VALUE
Mechanical View 1	Top overall length	39 mm
	Top inner length	37 mm
	Upper right local length	8 mm
	Upper left local length	4.5 mm
	Upper right leader callout	0-56x2
	Upper local length	12 mm
	Upper left small step width	0.5 mm
	Middle local width	3.9 mm
	Left middle local width	9.5 mm
	Diameter 7 hole or feature	Diameter 7 mm
	Diameter 38 dimension	Diameter 38 mm
	Diameter 63 h7 fit	Diameter 63 mm, h7 tolerance
	Diameter 10 H7 hole	Diameter 10 mm, H7 tolerance
	Diameter 62 dimension	Diameter 62 mm
	Diameter 28 dimension	Diameter 28 mm
	Diameter 48 h7 fit	Diameter 48 mm, h7 tolerance
	Diameter 79 outside diameter	Diameter 79 mm
	Datum D	Datum D
	Lower left leader callout	0-34.5x0.8
	Lower right local length with tolerance	11.1 mm ±0.2 mm
	Component label	WAVE GENERATOR-A
	12.5 dimension with unilateral tolerance	12.5 mm +0/-0.1 mm
	Lower left length	23.5 mm
	Bottom local dimension	2.4 mm
	Right Upper Step Width	4 mm
	Datum T	Datum T
Mechanical View 2	W dimension	W, value not specified
	8 threaded M4 mounting holes	8 × M4 threaded holes
	8 holes diameter 4.5	8 × 4 .5 holes
	Pitch circle diameter 71	7 1 pitch circle diameter
	M4 Tapped Holes	2-M4
	Hole Pitch Circle Diameter	Ø22
	Hole Position Parameter U	U
Mechanical View 3	Mounting hole pitch circle diameter	Pitch circle diameter Ø 7
	Threaded mounting hole quantity and size	6 × M5 threaded holes
Mechanical View 4	View direction	View D
	Central circle diameter	Diameter 16
	Threaded hole specification and depth	2 × M2.5 threaded holes; hole diameter 11 deep; depth 5 minimum
	Outer circle diameter	Diameter 12

Housing and Input Interface Dimensions

Housing Size: 17 Reduction Ratio: 120 Weight: 0.52 kg

WAVE GENERATOR	T (MM)	U	W
A8	9.4 +0.10	8 H7	3 JS9/P9
A11	12.8 +0.10	11 H7	4 JS9/P9

Note: Dimensions in mm unless otherwise specified. Refer to the dimensional drawing for feature locations and datum definitions.

Input Interface Design Guidance

- Confirm the selected series, frame size, ratio and product form before using dimensions or interface geometry.
- Design the input shaft, key, engagement and axial retention for the verified torque and assembly state.
- Reserve assembly, sealing, inspection and removal access around input, housing and output interfaces.

Mounting, Alignment and Fastener Control

- Keep mounting faces flat, clean and free of burrs, debris and coating buildup.
- Control concentricity, tilt and axial position of input and housing datums.
- Tighten fasteners in a staged diagonal sequence and verify free, even rotation during assembly.

Torque, Speed and Duty Boundaries

PARAMETER	VALUE	UNIT
Rated Torque	24	Nm
Allowable Average Torque	39	
Start/Stop Peak Torque	54	
Instantaneous Maximum Torque	86	
Maximum Input Speed	7300	r/min
Average Input Speed	3500	
Design Life	15000	h

- Calculate torque and speed from acceleration, constant-speed, deceleration, dwell and reversal portions of the complete cycle.
- Treat start/stop peak and instantaneous maximum torque as transient boundaries.
- Validate life against actual torque, speed, shock frequency, lubrication, temperature, alignment and external loading.

Torque, Speed and Life Boundaries

PARAMETER	VALUE	INTEGRATION REQUIREMENT
Rated Torque	24 Nm	Use as the selected continuous output rating under validated duty and thermal conditions.
Allowable Average Torque	39 Nm	Calculate the actual time-weighted output torque over the complete cycle.
Start/Stop Peak Torque	54 Nm	Transient start/stop boundary; include acceleration and deceleration events.
Instantaneous Maximum Torque	86 Nm	Short-duration shock boundary only; do not use as a normal operating point.
Maximum Input Speed	7300 r/min	Maximum input-speed boundary; also verify motor and thermal limits.
Average Input Speed	3500 r/min	Validate the time-weighted average input speed over the complete duty cycle.
Design Life	15000 h	Design reference only; actual life depends on torque, speed, shock, lubrication and installation.

Transmission Accuracy and Torsional Rigidity

PARAMETER	VALUE	UNIT
Backlash	20	arc sec

- Installed positioning depends on reducer behavior, datum control, structural stiffness, motor and encoder errors and thermal growth.
- Use stiffness regions and transition torques when evaluating compliance, resonance, control gain and reversal.

Lubrication, Sealing and Thermal Control

- Use the specified lubricant, fill method and quantity for the exact configuration; do not mix incompatible lubricants.
- Provide compatible sealing at input, output and housing interfaces without distorting the reducer.
- Validate lubricant distribution and temperature for orientation, speed, load cycle and enclosure.
- Prevent chips, fibers, residue and moisture from entering gear or bearing cavities.

Output Bearing and External Load Path

- Calculate radial, axial and moment loads including offset, acceleration, gravity, process force, impact and emergency stops.
- Do not infer permissible external load from reducer torque capacity or frame size.
- Avoid forcing, impact, misalignment or host distortion through the output support during installation and operation.

Integration Checklist

- | | |
|----|---|
| 01 | Confirm the selected series, frame size, ratio and product form for this SKU. |
| 02 | Verify available dimensions and interface geometry without substituting a nearby configuration. |
| 03 | Check mounting-face flatness, concentricity, tilt, reliefs, cleanliness and support stiffness. |
| 04 | Verify input shaft, key, engagement length and axial retention. |
| 05 | Use staged diagonal tightening and verify free, even rotation. |
| 06 | Calculate average, start/stop peak and shock torque over the complete cycle. |
| 07 | Validate average and maximum input speed, design life and thermal condition. |
| 08 | Evaluate backlash, angular accuracy, hysteresis and stiffness for the control system. |
| 09 | Confirm lubricant, fill quantity, orientation, sealing and contamination controls. |
| 10 | Validate output radial, axial and moment loads using applicable bearing data. |

[View SKU Product Datasheet](#) [Request controlled 2D drawing](#) [Request controlled STEP review](#) [Request a Quote](#)

Engineering Use and Verification Notice

01. This Dimensional & Integration Guide applies only to EmbodyStack SKU ES-HG-S11-F17-R120 and supports preliminary dimensional evaluation and integration. It is not a manufacturing drawing, reducer selection approval, bearing-load approval, lubrication specification, machinery risk assessment, safety validation or integration planning document. Before design freeze, assembly or commissioning, verify all dimensions, datum geometry, fits, interfaces, retention, fasteners, torque and speed duty, shock cases, torsional behavior, external loads, lubrication, sealing, temperature, contamination and maintenance requirements against the current EmbodyStack engineering data for this exact SKU. Validate the complete reducer, motor, host structure, output load, motion cycle, guarding, fault cases and applicable regulatory requirements under intended operating conditions.