

ENGINEERING DOCUMENTATION

Ball Screw Linear Module Engineering Configuration

Dimensional & Integration Guide

DOCUMENT	REVISION / ISSUE	STATUS
DIG-ES-LA-S06-P01	DRAFT-08 / 29 Aug 2026	Engineering Integration Reference

Integration Overview


Exact ball-screw linear-module configuration for guided linear motion in automation equipment. This guide supports dimensional layout, mounting, load-path , motor and coupling integration, cable and sensor clearance, maintenance and commissioning for ES-LA-S06-P01.

Key Integration Facts


INTEGRATION ITEM	VALUE
Working Stroke	Configuration-dependent (511 records)
Overall Length	
Module Mass	
Motor Mounting Style	Configuration-dependent (511 records)
Configured Motor Power	400 W

Product Structure & Views


These views present the selected product structure, mounting interfaces and relevant integration geometry for this configuration.

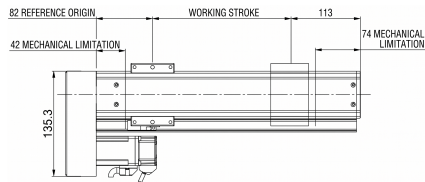


Mechanical View 1

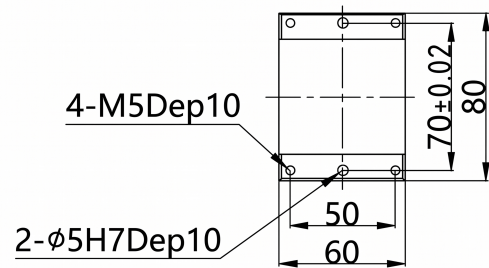


Standard Sliding rack



Mechanical View 3

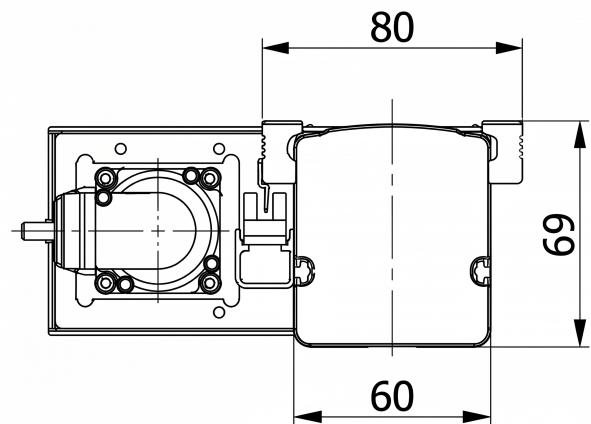

Mechanical View 4

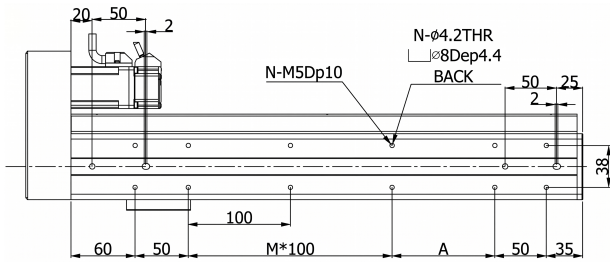

Mechanical View 5

VIEW	FIELD	VALUE
Mechanical View 1	Reference Origin Position	82 mm from reference origin
	Working Stroke	Working stroke range
	Working Stroke Length	113 mm
	Left Mechanical Limitation Position	42 mm mechanical limit
	Right Mechanical Limitation Position	74 mm mechanical limit
	Overall Height	135.3 mm
Mechanical View 2	Vertical height with tolerance	70±0.02
	Overall height	80
	M5 threaded hole specification	4-M5 Depth 10
	Mounting hole spacing	50
	Dowel pin hole specification	2-ØH7 Depth 10
	Overall width	60
Mechanical View 3	Mounting end width	42 mm
	Overall Length	L (variable, depends on model)
Mechanical View 4	Overall width	80
	Overall height	69
	Bottom width	60

VIEW	FIELD	VALUE
Mechanical View 5	Left protrusion width	20 mm
	Left connector zone length	50 mm
	Connector or shaft offset	2 mm
	Through hole specification	N holes, $\varnothing$ 2 mm through
	Counterbore hole specification	$\varnothing$ mm, depth 4.4 mm
	Threaded hole specification	N holes, M5 threaded, depth 10 mm
	Back side designation	Back side
	Right main body length	50 mm
	Right protrusion width	25 mm
	Right connector offset	2 mm
	Overall height	38 mm
	Bottom mounting hole spacing	100 mm
	Left edge distance	60 mm
	Bottom section segment length	50 mm
	Reference or variable dimension	M × 100 mm (variable)
	Datum A	Datum A
	Right section segment length	50 mm
	Right edge distance	35 mm

Configuration Dimensions

- Each row remains bound to one aggregate source configuration. Compare values by row; do not combine cells from different rows into an assumed module configuration.

Configuration Dimensions

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 01 - Stroke: 750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	750 mm	1025 mm	9 kg
Configuration 02 - Stroke: 1000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1000 mm	1275 mm	10.5 kg
Configuration 03 - Stroke: 2950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2950 mm	3225 mm	22.1 kg
Configuration 04 - Stroke: 100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	100 mm	375 mm	5.1 kg
Configuration 05 - Stroke: 1150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1150 mm	1425 mm	11.4 kg
Configuration 06 - Stroke: 850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	850 mm	1125 mm	9.6 kg
Configuration 07 - Stroke: 2600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2600 mm	2875 mm	20 kg
Configuration 08 - Stroke: 2650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2650 mm	2925 mm	20.3 kg
Configuration 09 - Stroke: 2200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2200 mm	2475 mm	17.6 kg
Configuration 10 - Stroke: 2150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2150 mm	2425 mm	17.3 kg
Configuration 11 - Stroke: 650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	650 mm	925 mm	8.4 kg
Configuration 12 - Stroke: 1100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1100 mm	1375 mm	11.1 kg
Configuration 13 - Stroke: 3300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3300 mm	3575 mm	24.2 kg
Configuration 14 - Stroke: 800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	800 mm	1075 mm	9.3 kg
Configuration 15 - Stroke: 1600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1600 mm	1875 mm	14.1 kg
Configuration 16 - Stroke: 2550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2550 mm	2825 mm	19.7 kg
Configuration 17 - Stroke: 2200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2200 mm	2475 mm	17.6 kg
Configuration 18 - Stroke: 1350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1350 mm	1625 mm	12.6 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 19 - Stroke: 1750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1750 mm	2025 mm	15 kg
Configuration 20 - Stroke: 3600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3600 mm	3875 mm	26 kg
Configuration 21 - Stroke: 3500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3500 mm	3775 mm	25.4 kg
Configuration 22 - Stroke: 2400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2400 mm	2675 mm	18.8 kg
Configuration 23 - Stroke: 350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	350 mm	625 mm	6.6 kg
Configuration 24 - Stroke: 3500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3500 mm	3775 mm	25.4 kg
Configuration 25 - Stroke: 3200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3200 mm	3475 mm	23.6 kg
Configuration 26 - Stroke: 1000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1000 mm	1275 mm	10.5 kg
Configuration 27 - Stroke: 3750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3750 mm	4025 mm	26.9 kg
Configuration 28 - Stroke: 500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	500 mm	775 mm	7.5 kg
Configuration 29 - Stroke: 750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	750 mm	1025 mm	9 kg
Configuration 30 - Stroke: 1350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1350 mm	1625 mm	12.6 kg
Configuration 31 - Stroke: 900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	900 mm	1175 mm	9.9 kg
Configuration 32 - Stroke: 2900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2900 mm	3175 mm	21.8 kg
Configuration 33 - Stroke: 1200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1200 mm	1475 mm	11.7 kg
Configuration 34 - Stroke: 1350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1350 mm	1625 mm	12.6 kg
Configuration 35 - Stroke: 2800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2800 mm	3075 mm	21.2 kg
Configuration 36 - Stroke: 1250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1250 mm	1525 mm	12 kg
Configuration 37 - Stroke: 2000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2000 mm	2275 mm	16.4 kg
Configuration 38 - Stroke: 3400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3400 mm	3675 mm	24.8 kg
Configuration 39 - Stroke: 900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	900 mm	1175 mm	9.9 kg
Configuration 40 - Stroke: 3600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3600 mm	3875 mm	26 kg
Configuration 41 - Stroke: 800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	800 mm	1075 mm	9.3 kg
Configuration 42 - Stroke: 1050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1050 mm	1325 mm	10.8 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 43 – Stroke: 3850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3850 mm	4125 mm	27.5 kg
Configuration 44 – Stroke: 1250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1250 mm	1525 mm	12 kg
Configuration 45 – Stroke: 2800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2800 mm	3075 mm	21.2 kg
Configuration 46 – Stroke: 1100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1100 mm	1375 mm	11.1 kg
Configuration 47 – Stroke: 250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	250 mm	525 mm	6 kg
Configuration 48 – Stroke: 2050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2050 mm	2325 mm	16.7 kg
Configuration 49 – Stroke: 3550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3550 mm	3825 mm	25.7 kg
Configuration 50 – Stroke: 3000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3000 mm	3275 mm	22.4 kg
Configuration 51 – Stroke: 600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	600 mm	875 mm	8.1 kg
Configuration 52 – Stroke: 3200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3200 mm	3475 mm	23.6 kg
Configuration 53 – Stroke: 100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	100 mm	375 mm	5.1 kg
Configuration 54 – Stroke: 300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	300 mm	575 mm	6.3 kg
Configuration 55 – Stroke: 1300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1300 mm	1575 mm	12.3 kg
Configuration 56 – Stroke: 3500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3500 mm	3775 mm	25.4 kg
Configuration 57 – Stroke: 3600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3600 mm	3875 mm	26 kg
Configuration 58 – Stroke: 650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	650 mm	925 mm	8.4 kg
Configuration 59 – Stroke: 3500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3500 mm	3775 mm	25.4 kg
Configuration 60 – Stroke: 500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	500 mm	775 mm	7.5 kg
Configuration 61 – Stroke: 650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	650 mm	925 mm	8.4 kg
Configuration 62 – Stroke: 400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	400 mm	675 mm	6.9 kg
Configuration 63 – Stroke: 550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	550 mm	825 mm	7.8 kg
Configuration 64 – Stroke: 1550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1550 mm	1825 mm	13.8 kg
Configuration 65 – Stroke: 1450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1450 mm	1725 mm	13.2 kg
Configuration 66 – Stroke: 3300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3300 mm	3575 mm	24.2 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 67 - Stroke: 150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	150 mm	425 mm	5.4 kg
Configuration 68 - Stroke: 1450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1450 mm	1725 mm	13.2 kg
Configuration 69 - Stroke: 2750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2750 mm	3025 mm	20.9 kg
Configuration 70 - Stroke: 450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	450 mm	725 mm	7.2 kg
Configuration 71 - Stroke: 850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	850 mm	1125 mm	9.6 kg
Configuration 72 - Stroke: 2450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2450 mm	2725 mm	19.1 kg
Configuration 73 - Stroke: 2950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2950 mm	3225 mm	22.1 kg
Configuration 74 - Stroke: 1100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1100 mm	1375 mm	11.1 kg
Configuration 75 - Stroke: 3800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3800 mm	4075 mm	27.2 kg
Configuration 76 - Stroke: 3850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3850 mm	4125 mm	27.5 kg
Configuration 77 - Stroke: 200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	200 mm	475 mm	5.7 kg
Configuration 78 - Stroke: 1700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1700 mm	1975 mm	14.7 kg
Configuration 79 - Stroke: 3450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3450 mm	3725 mm	25.1 kg
Configuration 80 - Stroke: 2700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2700 mm	2975 mm	20.6 kg
Configuration 81 - Stroke: 2000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2000 mm	2275 mm	16.4 kg
Configuration 82 - Stroke: 3100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3100 mm	3375 mm	23 kg
Configuration 83 - Stroke: 2000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2000 mm	2275 mm	16.4 kg
Configuration 84 - Stroke: 2700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2700 mm	2975 mm	20.6 kg
Configuration 85 - Stroke: 1250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1250 mm	1525 mm	12 kg
Configuration 86 - Stroke: 1150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1150 mm	1425 mm	11.4 kg
Configuration 87 - Stroke: 650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	650 mm	925 mm	8.4 kg
Configuration 88 - Stroke: 1050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1050 mm	1325 mm	10.8 kg
Configuration 89 - Stroke: 2050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2050 mm	2325 mm	16.7 kg
Configuration 90 - Stroke: 2300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2300 mm	2575 mm	18.2 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 91 - Stroke: 1750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1750 mm	2025 mm	15 kg
Configuration 92 - Stroke: 950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	950 mm	1225 mm	10.2 kg
Configuration 93 - Stroke: 1100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1100 mm	1375 mm	11.1 kg
Configuration 94 - Stroke: 3000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3000 mm	3275 mm	22.4 kg
Configuration 95 - Stroke: 650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	650 mm	925 mm	8.4 kg
Configuration 96 - Stroke: 1300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1300 mm	1575 mm	12.3 kg
Configuration 97 - Stroke: 2250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2250 mm	2525 mm	17.9 kg
Configuration 98 - Stroke: 1500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1500 mm	1775 mm	13.5 kg
Configuration 99 - Stroke: 200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	200 mm	475 mm	5.7 kg
Configuration 100 - Stroke: 400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	400 mm	675 mm	6.9 kg
Configuration 101 - Stroke: 3800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3800 mm	4075 mm	27.2 kg
Configuration 102 - Stroke: 2400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2400 mm	2675 mm	18.8 kg
Configuration 103 - Stroke: 3050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3050 mm	3325 mm	22.7 kg
Configuration 104 - Stroke: 2600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2600 mm	2875 mm	20 kg
Configuration 105 - Stroke: 400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	400 mm	675 mm	6.9 kg
Configuration 106 - Stroke: 750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	750 mm	1025 mm	9 kg
Configuration 107 - Stroke: 1450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1450 mm	1725 mm	13.2 kg
Configuration 108 - Stroke: 1950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1950 mm	2225 mm	16.2 kg
Configuration 109 - Stroke: 1100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1100 mm	1375 mm	11.1 kg
Configuration 110 - Stroke: 1250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1250 mm	1525 mm	12 kg
Configuration 111 - Stroke: 2000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2000 mm	2275 mm	16.4 kg
Configuration 112 - Stroke: 1000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1000 mm	1275 mm	10.5 kg
Configuration 113 - Stroke: 3150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3150 mm	3425 mm	23.3 kg
Configuration 114 - Stroke: 550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	550 mm	825 mm	7.8 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 115 – Stroke: 1500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1500 mm	1775 mm	13.5 kg
Configuration 116 – Stroke: 350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	350 mm	625 mm	6.6 kg
Configuration 117 – Stroke: 1900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1900 mm	2175 mm	15.9 kg
Configuration 118 – Stroke: 2100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2100 mm	2375 mm	17 kg
Configuration 119 – Stroke: 2900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2900 mm	3175 mm	21.8 kg
Configuration 120 – Stroke: 2050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2050 mm	2325 mm	16.7 kg
Configuration 121 – Stroke: 400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	400 mm	675 mm	6.9 kg
Configuration 122 – Stroke: 1000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1000 mm	1275 mm	10.5 kg
Configuration 123 – Stroke: 1750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1750 mm	2025 mm	15 kg
Configuration 124 – Stroke: 750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	750 mm	1025 mm	9 kg
Configuration 125 – Stroke: 4000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	4000 mm	4275 mm	28.4 kg
Configuration 126 – Stroke: 1550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1550 mm	1825 mm	13.8 kg
Configuration 127 – Stroke: 150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	150 mm	425 mm	5.4 kg
Configuration 128 – Stroke: 1000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1000 mm	1275 mm	10.5 kg
Configuration 129 – Stroke: 350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	350 mm	625 mm	6.6 kg
Configuration 130 – Stroke: 3000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3000 mm	3275 mm	22.4 kg
Configuration 131 – Stroke: 300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	300 mm	575 mm	6.3 kg
Configuration 132 – Stroke: 450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	450 mm	725 mm	7.2 kg
Configuration 133 – Stroke: 3450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3450 mm	3725 mm	25.1 kg
Configuration 134 – Stroke: 2350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2350 mm	2625 mm	18.5 kg
Configuration 135 – Stroke: 1300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1300 mm	1575 mm	12.3 kg
Configuration 136 – Stroke: 1000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1000 mm	1275 mm	10.5 kg
Configuration 137 – Stroke: 1200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1200 mm	1475 mm	11.7 kg
Configuration 138 – Stroke: 3200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3200 mm	3475 mm	23.6 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 139 - Stroke: 800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	800 mm	1075 mm	9.3 kg
Configuration 140 - Stroke: 3600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3600 mm	3875 mm	26 kg
Configuration 141 - Stroke: 1250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1250 mm	1525 mm	12 kg
Configuration 142 - Stroke: 600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	600 mm	875 mm	8.1 kg
Configuration 143 - Stroke: 500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	500 mm	775 mm	7.5 kg
Configuration 144 - Stroke: 1350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1350 mm	1625 mm	12.6 kg
Configuration 145 - Stroke: 2350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2350 mm	2625 mm	18.5 kg
Configuration 146 - Stroke: 2200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2200 mm	2475 mm	17.6 kg
Configuration 147 - Stroke: 4000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	4000 mm	4275 mm	28.4 kg
Configuration 148 - Stroke: 950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	950 mm	1225 mm	10.2 kg
Configuration 149 - Stroke: 1250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1250 mm	1525 mm	12 kg
Configuration 150 - Stroke: 350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	350 mm	625 mm	6.6 kg
Configuration 151 - Stroke: 450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	450 mm	725 mm	7.2 kg
Configuration 152 - Stroke: 800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	800 mm	1075 mm	9.3 kg
Configuration 153 - Stroke: 3200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3200 mm	3475 mm	23.6 kg
Configuration 154 - Stroke: 1800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1800 mm	2075 mm	15.3 kg
Configuration 155 - Stroke: 3450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3450 mm	3725 mm	25.1 kg
Configuration 156 - Stroke: 2250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2250 mm	2525 mm	17.9 kg
Configuration 157 - Stroke: 2700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2700 mm	2975 mm	20.6 kg
Configuration 158 - Stroke: 400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	400 mm	675 mm	6.9 kg
Configuration 159 - Stroke: 2900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2900 mm	3175 mm	21.8 kg
Configuration 160 - Stroke: 2250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2250 mm	2525 mm	17.9 kg
Configuration 161 - Stroke: 1300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1300 mm	1575 mm	12.3 kg
Configuration 162 - Stroke: 1000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1000 mm	1275 mm	10.5 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 163 - Stroke: 2300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2300 mm	2575 mm	18.2 kg
Configuration 164 - Stroke: 3550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3550 mm	3825 mm	25.7 kg
Configuration 165 - Stroke: 3550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3550 mm	3825 mm	25.7 kg
Configuration 166 - Stroke: 450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	450 mm	725 mm	7.2 kg
Configuration 167 - Stroke: 3500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3500 mm	3775 mm	25.4 kg
Configuration 168 - Stroke: 2100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2100 mm	2375 mm	17 kg
Configuration 169 - Stroke: 3700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3700 mm	3975 mm	26.6 kg
Configuration 170 - Stroke: 1800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1800 mm	2075 mm	15.3 kg
Configuration 171 - Stroke: 2100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2100 mm	2375 mm	17 kg
Configuration 172 - Stroke: 1550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1550 mm	1825 mm	13.8 kg
Configuration 173 - Stroke: 3400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3400 mm	3675 mm	24.8 kg
Configuration 174 - Stroke: 2500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2500 mm	2775 mm	19.4 kg
Configuration 175 - Stroke: 2600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2600 mm	2875 mm	20 kg
Configuration 176 - Stroke: 1800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1800 mm	2075 mm	15.3 kg
Configuration 177 - Stroke: 100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	100 mm	375 mm	5.1 kg
Configuration 178 - Stroke: 1950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1950 mm	2225 mm	16.2 kg
Configuration 179 - Stroke: 1200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1200 mm	1475 mm	11.7 kg
Configuration 180 - Stroke: 1700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1700 mm	1975 mm	14.7 kg
Configuration 181 - Stroke: 550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	550 mm	825 mm	7.8 kg
Configuration 182 - Stroke: 2500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2500 mm	2775 mm	19.4 kg
Configuration 183 - Stroke: 2050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2050 mm	2325 mm	16.7 kg
Configuration 184 - Stroke: 3000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3000 mm	3275 mm	22.4 kg
Configuration 185 - Stroke: 700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	700 mm	975 mm	8.7 kg
Configuration 186 - Stroke: 1650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1650 mm	1925 mm	14.4 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 187 – Stroke: 3200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3200 mm	3475 mm	23.6 kg
Configuration 188 – Stroke: 850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	850 mm	1125 mm	9.6 kg
Configuration 189 – Stroke: 2500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2500 mm	2775 mm	19.4 kg
Configuration 190 – Stroke: 2800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2800 mm	3075 mm	21.2 kg
Configuration 191 – Stroke: 3450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3450 mm	3725 mm	25.1 kg
Configuration 192 – Stroke: 1200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1200 mm	1475 mm	11.7 kg
Configuration 193 – Stroke: 2800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2800 mm	3075 mm	21.2 kg
Configuration 194 – Stroke: 2450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2450 mm	2725 mm	19.1 kg
Configuration 195 – Stroke: 1050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1050 mm	1325 mm	10.8 kg
Configuration 196 – Stroke: 2200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2200 mm	2475 mm	17.6 kg
Configuration 197 – Stroke: 1700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1700 mm	1975 mm	14.7 kg
Configuration 198 – Stroke: 300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	300 mm	575 mm	6.3 kg
Configuration 199 – Stroke: 3650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3650 mm	3925 mm	26.3 kg
Configuration 200 – Stroke: 2400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2400 mm	2675 mm	18.8 kg
Configuration 201 – Stroke: 3650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3650 mm	3925 mm	26.3 kg
Configuration 202 – Stroke: 600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	600 mm	875 mm	8.1 kg
Configuration 203 – Stroke: 1700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1700 mm	1975 mm	14.7 kg
Configuration 204 – Stroke: 700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	700 mm	975 mm	8.7 kg
Configuration 205 – Stroke: 1900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1900 mm	2175 mm	15.9 kg
Configuration 206 – Stroke: 2500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2500 mm	2775 mm	19.4 kg
Configuration 207 – Stroke: 550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	550 mm	825 mm	7.8 kg
Configuration 208 – Stroke: 1850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1850 mm	2125 mm	15.6 kg
Configuration 209 – Stroke: 500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	500 mm	775 mm	7.5 kg
Configuration 210 – Stroke: 850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	850 mm	1125 mm	9.6 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 211 - Stroke: 3000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3000 mm	3275 mm	22.4 kg
Configuration 212 - Stroke: 450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	450 mm	725 mm	7.2 kg
Configuration 213 - Stroke: 2700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2700 mm	2975 mm	20.6 kg
Configuration 214 - Stroke: 500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	500 mm	775 mm	7.5 kg
Configuration 215 - Stroke: 3500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3500 mm	3775 mm	25.4 kg
Configuration 216 - Stroke: 1400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1400 mm	1675 mm	12.9 kg
Configuration 217 - Stroke: 1450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1450 mm	1725 mm	13.2 kg
Configuration 218 - Stroke: 1200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1200 mm	1475 mm	11.7 kg
Configuration 219 - Stroke: 1650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1650 mm	1925 mm	14.4 kg
Configuration 220 - Stroke: 3050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3050 mm	3325 mm	22.7 kg
Configuration 221 - Stroke: 2400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2400 mm	2675 mm	18.8 kg
Configuration 222 - Stroke: 2550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2550 mm	2825 mm	19.7 kg
Configuration 223 - Stroke: 1150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1150 mm	1425 mm	11.4 kg
Configuration 224 - Stroke: 250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	250 mm	525 mm	6 kg
Configuration 225 - Stroke: 700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	700 mm	975 mm	8.7 kg
Configuration 226 - Stroke: 2900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2900 mm	3175 mm	21.8 kg
Configuration 227 - Stroke: 1600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1600 mm	1875 mm	14.1 kg
Configuration 228 - Stroke: 3850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3850 mm	4125 mm	27.5 kg
Configuration 229 - Stroke: 3700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3700 mm	3975 mm	26.6 kg
Configuration 230 - Stroke: 3000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3000 mm	3275 mm	22.4 kg
Configuration 231 - Stroke: 2300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2300 mm	2575 mm	18.2 kg
Configuration 232 - Stroke: 1850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1850 mm	2125 mm	15.6 kg
Configuration 233 - Stroke: 1050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1050 mm	1325 mm	10.8 kg
Configuration 234 - Stroke: 800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	800 mm	1075 mm	9.3 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 235 - Stroke: 2100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2100 mm	2375 mm	17 kg
Configuration 236 - Stroke: 3300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3300 mm	3575 mm	24.2 kg
Configuration 237 - Stroke: 150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	150 mm	425 mm	5.4 kg
Configuration 238 - Stroke: 3400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3400 mm	3675 mm	24.8 kg
Configuration 239 - Stroke: 2100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2100 mm	2375 mm	17 kg
Configuration 240 - Stroke: 3300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3300 mm	3575 mm	24.2 kg
Configuration 241 - Stroke: 2600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2600 mm	2875 mm	20 kg
Configuration 242 - Stroke: 300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	300 mm	575 mm	6.3 kg
Configuration 243 - Stroke: 1750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1750 mm	2025 mm	15 kg
Configuration 244 - Stroke: 600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	600 mm	875 mm	8.1 kg
Configuration 245 - Stroke: 1100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1100 mm	1375 mm	11.1 kg
Configuration 246 - Stroke: 1150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1150 mm	1425 mm	11.4 kg
Configuration 247 - Stroke: 2500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2500 mm	2775 mm	19.4 kg
Configuration 248 - Stroke: 200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	200 mm	475 mm	5.7 kg
Configuration 249 - Stroke: 1500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1500 mm	1775 mm	13.5 kg
Configuration 250 - Stroke: 2150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2150 mm	2425 mm	17.3 kg
Configuration 251 - Stroke: 1500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1500 mm	1775 mm	13.5 kg
Configuration 252 - Stroke: 1300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1300 mm	1575 mm	12.3 kg
Configuration 253 - Stroke: 1000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1000 mm	1275 mm	10.5 kg
Configuration 254 - Stroke: 1950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1950 mm	2225 mm	16.2 kg
Configuration 255 - Stroke: 1900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1900 mm	2175 mm	15.9 kg
Configuration 256 - Stroke: 200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	200 mm	475 mm	5.7 kg
Configuration 257 - Stroke: 1150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1150 mm	1425 mm	11.4 kg
Configuration 258 - Stroke: 1300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1300 mm	1575 mm	12.3 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 259 - Stroke: 3100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3100 mm	3375 mm	23 kg
Configuration 260 - Stroke: 1500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1500 mm	1775 mm	13.5 kg
Configuration 261 - Stroke: 2650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2650 mm	2925 mm	20.3 kg
Configuration 262 - Stroke: 700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	700 mm	975 mm	8.7 kg
Configuration 263 - Stroke: 3350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3350 mm	3625 mm	24.5 kg
Configuration 264 - Stroke: 1350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1350 mm	1625 mm	12.6 kg
Configuration 265 - Stroke: 2250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2250 mm	2525 mm	17.9 kg
Configuration 266 - Stroke: 2300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2300 mm	2575 mm	18.2 kg
Configuration 267 - Stroke: 250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	250 mm	525 mm	6 kg
Configuration 268 - Stroke: 2900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2900 mm	3175 mm	21.8 kg
Configuration 269 - Stroke: 3050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3050 mm	3325 mm	22.7 kg
Configuration 270 - Stroke: 3100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3100 mm	3375 mm	23 kg
Configuration 271 - Stroke: 2050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2050 mm	2325 mm	16.7 kg
Configuration 272 - Stroke: 750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	750 mm	1025 mm	9 kg
Configuration 273 - Stroke: 900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	900 mm	1175 mm	9.9 kg
Configuration 274 - Stroke: 3100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3100 mm	3375 mm	23 kg
Configuration 275 - Stroke: 300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	300 mm	575 mm	6.3 kg
Configuration 276 - Stroke: 1850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1850 mm	2125 mm	15.6 kg
Configuration 277 - Stroke: 500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	500 mm	775 mm	7.5 kg
Configuration 278 - Stroke: 450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	450 mm	725 mm	7.2 kg
Configuration 279 - Stroke: 200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	200 mm	475 mm	5.7 kg
Configuration 280 - Stroke: 1900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1900 mm	2175 mm	15.9 kg
Configuration 281 - Stroke: 700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	700 mm	975 mm	8.7 kg
Configuration 282 - Stroke: 550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	550 mm	825 mm	7.8 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 283 - Stroke: 2700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2700 mm	2975 mm	20.6 kg
Configuration 284 - Stroke: 850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	850 mm	1125 mm	9.6 kg
Configuration 285 - Stroke: 3000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3000 mm	3275 mm	22.4 kg
Configuration 286 - Stroke: 1800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1800 mm	2075 mm	15.3 kg
Configuration 287 - Stroke: 3100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3100 mm	3375 mm	23 kg
Configuration 288 - Stroke: 2800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2800 mm	3075 mm	21.2 kg
Configuration 289 - Stroke: 2400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2400 mm	2675 mm	18.8 kg
Configuration 290 - Stroke: 1650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1650 mm	1925 mm	14.4 kg
Configuration 291 - Stroke: 1800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1800 mm	2075 mm	15.3 kg
Configuration 292 - Stroke: 2850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2850 mm	3125 mm	21.5 kg
Configuration 293 - Stroke: 2150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2150 mm	2425 mm	17.3 kg
Configuration 294 - Stroke: 3750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3750 mm	4025 mm	26.9 kg
Configuration 295 - Stroke: 3200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3200 mm	3475 mm	23.6 kg
Configuration 296 - Stroke: 750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	750 mm	1025 mm	9 kg
Configuration 297 - Stroke: 200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	200 mm	475 mm	5.7 kg
Configuration 298 - Stroke: 3050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3050 mm	3325 mm	22.7 kg
Configuration 299 - Stroke: 300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	300 mm	575 mm	6.3 kg
Configuration 300 - Stroke: 3200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3200 mm	3475 mm	23.6 kg
Configuration 301 - Stroke: 2500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2500 mm	2775 mm	19.4 kg
Configuration 302 - Stroke: 3500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3500 mm	3775 mm	25.4 kg
Configuration 303 - Stroke: 2000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2000 mm	2275 mm	16.4 kg
Configuration 304 - Stroke: 2850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2850 mm	3125 mm	21.5 kg
Configuration 305 - Stroke: 1650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1650 mm	1925 mm	14.4 kg
Configuration 306 - Stroke: 2600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2600 mm	2875 mm	20 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 307 - Stroke: 950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	950 mm	1225 mm	10.2 kg
Configuration 308 - Stroke: 1500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1500 mm	1775 mm	13.5 kg
Configuration 309 - Stroke: 3700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3700 mm	3975 mm	26.6 kg
Configuration 310 - Stroke: 600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	600 mm	875 mm	8.1 kg
Configuration 311 - Stroke: 1950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1950 mm	2225 mm	16.2 kg
Configuration 312 - Stroke: 2300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2300 mm	2575 mm	18.2 kg
Configuration 313 - Stroke: 1350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1350 mm	1625 mm	12.6 kg
Configuration 314 - Stroke: 450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	450 mm	725 mm	7.2 kg
Configuration 315 - Stroke: 1850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1850 mm	2125 mm	15.6 kg
Configuration 316 - Stroke: 600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	600 mm	875 mm	8.1 kg
Configuration 317 - Stroke: 3400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3400 mm	3675 mm	24.8 kg
Configuration 318 - Stroke: 2600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2600 mm	2875 mm	20 kg
Configuration 319 - Stroke: 1050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1050 mm	1325 mm	10.8 kg
Configuration 320 - Stroke: 3600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3600 mm	3875 mm	26 kg
Configuration 321 - Stroke: 700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	700 mm	975 mm	8.7 kg
Configuration 322 - Stroke: 650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	650 mm	925 mm	8.4 kg
Configuration 323 - Stroke: 250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	250 mm	525 mm	6 kg
Configuration 324 - Stroke: 2200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2200 mm	2475 mm	17.6 kg
Configuration 325 - Stroke: 2600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2600 mm	2875 mm	20 kg
Configuration 326 - Stroke: 1150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1150 mm	1425 mm	11.4 kg
Configuration 327 - Stroke: 1900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1900 mm	2175 mm	15.9 kg
Configuration 328 - Stroke: 900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	900 mm	1175 mm	9.9 kg
Configuration 329 - Stroke: 350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	350 mm	625 mm	6.6 kg
Configuration 330 - Stroke: 2800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2800 mm	3075 mm	21.2 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 331 - Stroke: 1400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1400 mm	1675 mm	12.9 kg
Configuration 332 - Stroke: 1500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1500 mm	1775 mm	13.5 kg
Configuration 333 - Stroke: 3750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3750 mm	4025 mm	26.9 kg
Configuration 334 - Stroke: 2100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2100 mm	2375 mm	17 kg
Configuration 335 - Stroke: 3900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3900 mm	4175 mm	27.8 kg
Configuration 336 - Stroke: 1050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1050 mm	1325 mm	10.8 kg
Configuration 337 - Stroke: 1400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1400 mm	1675 mm	12.9 kg
Configuration 338 - Stroke: 3000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3000 mm	3275 mm	22.4 kg
Configuration 339 - Stroke: 2200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2200 mm	2475 mm	17.6 kg
Configuration 340 - Stroke: 650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	650 mm	925 mm	8.4 kg
Configuration 341 - Stroke: 3500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3500 mm	3775 mm	25.4 kg
Configuration 342 - Stroke: 3800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3800 mm	4075 mm	27.2 kg
Configuration 343 - Stroke: 3300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3300 mm	3575 mm	24.2 kg
Configuration 344 - Stroke: 900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	900 mm	1175 mm	9.9 kg
Configuration 345 - Stroke: 2300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2300 mm	2575 mm	18.2 kg
Configuration 346 - Stroke: 2700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2700 mm	2975 mm	20.6 kg
Configuration 347 - Stroke: 3700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3700 mm	3975 mm	26.6 kg
Configuration 348 - Stroke: 1700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1700 mm	1975 mm	14.7 kg
Configuration 349 - Stroke: 350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	350 mm	625 mm	6.6 kg
Configuration 350 - Stroke: 3600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3600 mm	3875 mm	26 kg
Configuration 351 - Stroke: 1700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1700 mm	1975 mm	14.7 kg
Configuration 352 - Stroke: 3150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3150 mm	3425 mm	23.3 kg
Configuration 353 - Stroke: 3850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3850 mm	4125 mm	27.5 kg
Configuration 354 - Stroke: 2950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2950 mm	3225 mm	22.1 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 355 - Stroke: 1750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1750 mm	2025 mm	15 kg
Configuration 356 - Stroke: 1600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1600 mm	1875 mm	14.1 kg
Configuration 357 - Stroke: 1400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1400 mm	1675 mm	12.9 kg
Configuration 358 - Stroke: 2450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2450 mm	2725 mm	19.1 kg
Configuration 359 - Stroke: 1600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1600 mm	1875 mm	14.1 kg
Configuration 360 - Stroke: 800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	800 mm	1075 mm	9.3 kg
Configuration 361 - Stroke: 700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	700 mm	975 mm	8.7 kg
Configuration 362 - Stroke: 3400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3400 mm	3675 mm	24.8 kg
Configuration 363 - Stroke: 3250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3250 mm	3525 mm	23.9 kg
Configuration 364 - Stroke: 500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	500 mm	775 mm	7.5 kg
Configuration 365 - Stroke: 3900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3900 mm	4175 mm	27.8 kg
Configuration 366 - Stroke: 750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	750 mm	1025 mm	9 kg
Configuration 367 - Stroke: 3100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3100 mm	3375 mm	23 kg
Configuration 368 - Stroke: 800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	800 mm	1075 mm	9.3 kg
Configuration 369 - Stroke: 250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	250 mm	525 mm	6 kg
Configuration 370 - Stroke: 1050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1050 mm	1325 mm	10.8 kg
Configuration 371 - Stroke: 150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	150 mm	425 mm	5.4 kg
Configuration 372 - Stroke: 1250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1250 mm	1525 mm	12 kg
Configuration 373 - Stroke: 3300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3300 mm	3575 mm	24.2 kg
Configuration 374 - Stroke: 3700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3700 mm	3975 mm	26.6 kg
Configuration 375 - Stroke: 950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	950 mm	1225 mm	10.2 kg
Configuration 376 - Stroke: 1400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1400 mm	1675 mm	12.9 kg
Configuration 377 - Stroke: 2600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2600 mm	2875 mm	20 kg
Configuration 378 - Stroke: 950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	950 mm	1225 mm	10.2 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 379 - Stroke: 3150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3150 mm	3425 mm	23.3 kg
Configuration 380 - Stroke: 2000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2000 mm	2275 mm	16.4 kg
Configuration 381 - Stroke: 2850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2850 mm	3125 mm	21.5 kg
Configuration 382 - Stroke: 250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	250 mm	525 mm	6 kg
Configuration 383 - Stroke: 1800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1800 mm	2075 mm	15.3 kg
Configuration 384 - Stroke: 1100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1100 mm	1375 mm	11.1 kg
Configuration 385 - Stroke: 3350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3350 mm	3625 mm	24.5 kg
Configuration 386 - Stroke: 3400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3400 mm	3675 mm	24.8 kg
Configuration 387 - Stroke: 1550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1550 mm	1825 mm	13.8 kg
Configuration 388 - Stroke: 950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	950 mm	1225 mm	10.2 kg
Configuration 389 - Stroke: 1900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1900 mm	2175 mm	15.9 kg
Configuration 390 - Stroke: 2700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2700 mm	2975 mm	20.6 kg
Configuration 391 - Stroke: 400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	400 mm	675 mm	6.9 kg
Configuration 392 - Stroke: 2750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2750 mm	3025 mm	20.9 kg
Configuration 393 - Stroke: 550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	550 mm	825 mm	7.8 kg
Configuration 394 - Stroke: 1800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1800 mm	2075 mm	15.3 kg
Configuration 395 - Stroke: 3250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3250 mm	3525 mm	23.9 kg
Configuration 396 - Stroke: 1600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1600 mm	1875 mm	14.1 kg
Configuration 397 - Stroke: 900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	900 mm	1175 mm	9.9 kg
Configuration 398 - Stroke: 3700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3700 mm	3975 mm	26.6 kg
Configuration 399 - Stroke: 600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	600 mm	875 mm	8.1 kg
Configuration 400 - Stroke: 1200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1200 mm	1475 mm	11.7 kg
Configuration 401 - Stroke: 2300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2300 mm	2575 mm	18.2 kg
Configuration 402 - Stroke: 2550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2550 mm	2825 mm	19.7 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 403 - Stroke: 3400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3400 mm	3675 mm	24.8 kg
Configuration 404 - Stroke: 550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	550 mm	825 mm	7.8 kg
Configuration 405 - Stroke: 1100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1100 mm	1375 mm	11.1 kg
Configuration 406 - Stroke: 1300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1300 mm	1575 mm	12.3 kg
Configuration 407 - Stroke: 2900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2900 mm	3175 mm	21.8 kg
Configuration 408 - Stroke: 1850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1850 mm	2125 mm	15.6 kg
Configuration 409 - Stroke: 1900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1900 mm	2175 mm	15.9 kg
Configuration 410 - Stroke: 850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	850 mm	1125 mm	9.6 kg
Configuration 411 - Stroke: 600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	600 mm	875 mm	8.1 kg
Configuration 412 - Stroke: 2800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2800 mm	3075 mm	21.2 kg
Configuration 413 - Stroke: 2900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2900 mm	3175 mm	21.8 kg
Configuration 414 - Stroke: 2850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2850 mm	3125 mm	21.5 kg
Configuration 415 - Stroke: 2700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2700 mm	2975 mm	20.6 kg
Configuration 416 - Stroke: 3800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3800 mm	4075 mm	27.2 kg
Configuration 417 - Stroke: 1300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1300 mm	1575 mm	12.3 kg
Configuration 418 - Stroke: 1200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1200 mm	1475 mm	11.7 kg
Configuration 419 - Stroke: 400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	400 mm	675 mm	6.9 kg
Configuration 420 - Stroke: 3800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3800 mm	4075 mm	27.2 kg
Configuration 421 - Stroke: 3800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3800 mm	4075 mm	27.2 kg
Configuration 422 - Stroke: 2100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2100 mm	2375 mm	17 kg
Configuration 423 - Stroke: 2500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2500 mm	2775 mm	19.4 kg
Configuration 424 - Stroke: 350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	350 mm	625 mm	6.6 kg
Configuration 425 - Stroke: 250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	250 mm	525 mm	6 kg
Configuration 426 - Stroke: 850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	850 mm	1125 mm	9.6 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 427 - Stroke: 2650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2650 mm	2925 mm	20.3 kg
Configuration 428 - Stroke: 550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	550 mm	825 mm	7.8 kg
Configuration 429 - Stroke: 1600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1600 mm	1875 mm	14.1 kg
Configuration 430 - Stroke: 2750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2750 mm	3025 mm	20.9 kg
Configuration 431 - Stroke: 1650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1650 mm	1925 mm	14.4 kg
Configuration 432 - Stroke: 100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	100 mm	375 mm	5.1 kg
Configuration 433 - Stroke: 1450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1450 mm	1725 mm	13.2 kg
Configuration 434 - Stroke: 950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	950 mm	1225 mm	10.2 kg
Configuration 435 - Stroke: 3800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3800 mm	4075 mm	27.2 kg
Configuration 436 - Stroke: 200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	200 mm	475 mm	5.7 kg
Configuration 437 - Stroke: 1900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1900 mm	2175 mm	15.9 kg
Configuration 438 - Stroke: 2500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2500 mm	2775 mm	19.4 kg
Configuration 439 - Stroke: 2400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2400 mm	2675 mm	18.8 kg
Configuration 440 - Stroke: 3100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3100 mm	3375 mm	23 kg
Configuration 441 - Stroke: 500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	500 mm	775 mm	7.5 kg
Configuration 442 - Stroke: 1500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1500 mm	1775 mm	13.5 kg
Configuration 443 - Stroke: 2650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2650 mm	2925 mm	20.3 kg
Configuration 444 - Stroke: 300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	300 mm	575 mm	6.3 kg
Configuration 445 - Stroke: 2200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2200 mm	2475 mm	17.6 kg
Configuration 446 - Stroke: 1550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1550 mm	1825 mm	13.8 kg
Configuration 447 - Stroke: 1700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1700 mm	1975 mm	14.7 kg
Configuration 448 - Stroke: 2150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2150 mm	2425 mm	17.3 kg
Configuration 449 - Stroke: 3150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3150 mm	3425 mm	23.3 kg
Configuration 450 - Stroke: 3550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3550 mm	3825 mm	25.7 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 451 - Stroke: 1050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1050 mm	1325 mm	10.8 kg
Configuration 452 - Stroke: 2450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2450 mm	2725 mm	19.1 kg
Configuration 453 - Stroke: 3700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3700 mm	3975 mm	26.6 kg
Configuration 454 - Stroke: 2300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2300 mm	2575 mm	18.2 kg
Configuration 455 - Stroke: 2000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2000 mm	2275 mm	16.4 kg
Configuration 456 - Stroke: 950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	950 mm	1225 mm	10.2 kg
Configuration 457 - Stroke: 1200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1200 mm	1475 mm	11.7 kg
Configuration 458 - Stroke: 2800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2800 mm	3075 mm	21.2 kg
Configuration 459 - Stroke: 2000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2000 mm	2275 mm	16.4 kg
Configuration 460 - Stroke: 750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	750 mm	1025 mm	9 kg
Configuration 461 - Stroke: 3350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3350 mm	3625 mm	24.5 kg
Configuration 462 - Stroke: 4000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	4000 mm	4275 mm	28.4 kg
Configuration 463 - Stroke: 1700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1700 mm	1975 mm	14.7 kg
Configuration 464 - Stroke: 150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	150 mm	425 mm	5.4 kg
Configuration 465 - Stroke: 1450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1450 mm	1725 mm	13.2 kg
Configuration 466 - Stroke: 1800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1800 mm	2075 mm	15.3 kg
Configuration 467 - Stroke: 250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	250 mm	525 mm	6 kg
Configuration 468 - Stroke: 2400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2400 mm	2675 mm	18.8 kg
Configuration 469 - Stroke: 400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	400 mm	675 mm	6.9 kg
Configuration 470 - Stroke: 3650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3650 mm	3925 mm	26.3 kg
Configuration 471 - Stroke: 3800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3800 mm	4075 mm	27.2 kg
Configuration 472 - Stroke: 200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	200 mm	475 mm	5.7 kg
Configuration 473 - Stroke: 1150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1150 mm	1425 mm	11.4 kg
Configuration 474 - Stroke: 2200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2200 mm	2475 mm	17.6 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 475 - Stroke: 3650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3650 mm	3925 mm	26.3 kg
Configuration 476 - Stroke: 1600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1600 mm	1875 mm	14.1 kg
Configuration 477 - Stroke: 3300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3300 mm	3575 mm	24.2 kg
Configuration 478 - Stroke: 2400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2400 mm	2675 mm	18.8 kg
Configuration 479 - Stroke: 3400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3400 mm	3675 mm	24.8 kg
Configuration 480 - Stroke: 2100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2100 mm	2375 mm	17 kg
Configuration 481 - Stroke: 850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	850 mm	1125 mm	9.6 kg
Configuration 482 - Stroke: 2350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2350 mm	2625 mm	18.5 kg
Configuration 483 - Stroke: 2550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2550 mm	2825 mm	19.7 kg
Configuration 484 - Stroke: 2950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	2950 mm	3225 mm	22.1 kg
Configuration 485 - Stroke: 700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	700 mm	975 mm	8.7 kg
Configuration 486 - Stroke: 350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	350 mm	625 mm	6.6 kg
Configuration 487 - Stroke: 3350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3350 mm	3625 mm	24.5 kg
Configuration 488 - Stroke: 2350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2350 mm	2625 mm	18.5 kg
Configuration 489 - Stroke: 900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	900 mm	1175 mm	9.9 kg
Configuration 490 - Stroke: 800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	800 mm	1075 mm	9.3 kg
Configuration 491 - Stroke: 1950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1950 mm	2225 mm	16.2 kg
Configuration 492 - Stroke: 2900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2900 mm	3175 mm	21.8 kg
Configuration 493 - Stroke: 4000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	4000 mm	4275 mm	28.4 kg
Configuration 494 - Stroke: 1150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1150 mm	1425 mm	11.4 kg
Configuration 495 - Stroke: 2750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	2750 mm	3025 mm	20.9 kg
Configuration 496 - Stroke: 3250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3250 mm	3525 mm	23.9 kg
Configuration 497 - Stroke: 1350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1350 mm	1625 mm	12.6 kg
Configuration 498 - Stroke: 1400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1400 mm	1675 mm	12.9 kg

CONFIGURATION	WORKING STROKE	OVERALL LENGTH	MODULE MASS
Configuration 499 - Stroke: 3600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	3600 mm	3875 mm	26 kg
Configuration 500 - Stroke: 100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	100 mm	375 mm	5.1 kg
Configuration 501 - Stroke: 650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	650 mm	925 mm	8.4 kg
Configuration 502 - Stroke: 300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	300 mm	575 mm	6.3 kg
Configuration 503 - Stroke: 100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	100 mm	375 mm	5.1 kg
Configuration 504 - Stroke: 1400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	1400 mm	1675 mm	12.9 kg
Configuration 505 - Stroke: 3250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3250 mm	3525 mm	23.9 kg
Configuration 506 - Stroke: 3100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3100 mm	3375 mm	23 kg
Configuration 507 - Stroke: 450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	450 mm	725 mm	7.2 kg
Configuration 508 - Stroke: 900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	900 mm	1175 mm	9.9 kg
Configuration 509 - Stroke: 3750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3750 mm	4025 mm	26.9 kg
Configuration 510 - Stroke: 1400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	1400 mm	1675 mm	12.9 kg
Configuration 511 - Stroke: 3200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	3200 mm	3475 mm	23.6 kg

Motor Interface Configuration

Motor Interface Configuration

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 01 - Stroke: 750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 02 - Stroke: 1000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 03 - Stroke: 2950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 04 - Stroke: 100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 05 - Stroke: 1150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 06 - Stroke: 850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 07 - Stroke: 2600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 08 - Stroke: 2650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 09 - Stroke: 2200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 10 - Stroke: 2150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 11 - Stroke: 650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 12 - Stroke: 1100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 13 - Stroke: 3300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 14 - Stroke: 800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 15 - Stroke: 1600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 16 - Stroke: 2550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 17 - Stroke: 2200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 18 - Stroke: 1350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 19 - Stroke: 1750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 20 - Stroke: 3600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 21 - Stroke: 3500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 22 - Stroke: 2400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 23 - Stroke: 350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 24 - Stroke: 3500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 25 - Stroke: 3200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 26 - Stroke: 1000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 27 - Stroke: 3750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 28 - Stroke: 500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 29 - Stroke: 750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 30 - Stroke: 1350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 31 - Stroke: 900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 32 - Stroke: 2900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 33 - Stroke: 1200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 34 - Stroke: 1350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 35 - Stroke: 2800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 36 - Stroke: 1250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 37 - Stroke: 2000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 38 - Stroke: 3400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 39 - Stroke: 900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 40 - Stroke: 3600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 41 - Stroke: 800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 42 - Stroke: 1050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 43 - Stroke: 3850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 44 - Stroke: 1250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 45 - Stroke: 2800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 46 - Stroke: 1100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 47 - Stroke: 250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 48 - Stroke: 2050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 49 - Stroke: 3550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 50 - Stroke: 3000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 51 - Stroke: 600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 52 - Stroke: 3200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 53 - Stroke: 100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 54 - Stroke: 300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 55 - Stroke: 1300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 56 - Stroke: 3500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 57 - Stroke: 3600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 58 - Stroke: 650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 59 - Stroke: 3500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 60 - Stroke: 500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 61 - Stroke: 650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 62 - Stroke: 400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 63 - Stroke: 550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 64 - Stroke: 1550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 65 - Stroke: 1450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 66 - Stroke: 3300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 67 - Stroke: 150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 68 - Stroke: 1450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 69 - Stroke: 2750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 70 - Stroke: 450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 71 - Stroke: 850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 72 - Stroke: 2450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 73 - Stroke: 2950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 74 - Stroke: 1100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 75 - Stroke: 3800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 76 - Stroke: 3850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 77 - Stroke: 200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 78 - Stroke: 1700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 79 - Stroke: 3450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 80 - Stroke: 2700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 81 - Stroke: 2000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 82 - Stroke: 3100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 83 - Stroke: 2000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 84 - Stroke: 2700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 85 - Stroke: 1250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 86 - Stroke: 1150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 87 - Stroke: 650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 88 - Stroke: 1050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 89 - Stroke: 2050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 90 - Stroke: 2300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 91 - Stroke: 1750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 92 - Stroke: 950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 93 - Stroke: 1100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 94 - Stroke: 3000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 95 - Stroke: 650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 96 - Stroke: 1300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 97 - Stroke: 2250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 98 - Stroke: 1500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 99 - Stroke: 200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 100 - Stroke: 400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 101 - Stroke: 3800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 102 - Stroke: 2400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 103 - Stroke: 3050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 104 - Stroke: 2600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 105 - Stroke: 400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 106 - Stroke: 750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 107 - Stroke: 1450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 108 - Stroke: 1950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 109 - Stroke: 1100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 110 - Stroke: 1250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 111 - Stroke: 2000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 112 - Stroke: 1000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 113 - Stroke: 3150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 114 - Stroke: 550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 115 - Stroke: 1500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 116 - Stroke: 350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 117 - Stroke: 1900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 118 - Stroke: 2100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 119 - Stroke: 2900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 120 - Stroke: 2050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 121 - Stroke: 400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 122 - Stroke: 1000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 123 - Stroke: 1750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 124 - Stroke: 750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 125 - Stroke: 4000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 126 - Stroke: 1550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 127 - Stroke: 150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 128 - Stroke: 1000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 129 - Stroke: 350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 130 - Stroke: 3000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 131 - Stroke: 300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 132 - Stroke: 450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 133 - Stroke: 3450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 134 - Stroke: 2350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 135 - Stroke: 1300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 136 - Stroke: 1000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 137 - Stroke: 1200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 138 - Stroke: 3200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 139 - Stroke: 800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 140 - Stroke: 3600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 141 - Stroke: 1250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 142 - Stroke: 600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 143 - Stroke: 500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 144 - Stroke: 1350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 145 - Stroke: 2350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 146 - Stroke: 2200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 147 - Stroke: 4000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 148 - Stroke: 950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 149 - Stroke: 1250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 150 - Stroke: 350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 151 - Stroke: 450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 152 - Stroke: 800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 153 - Stroke: 3200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 154 - Stroke: 1800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 155 - Stroke: 3450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 156 - Stroke: 2250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 157 - Stroke: 2700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 158 - Stroke: 400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 159 - Stroke: 2900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 160 - Stroke: 2250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 161 - Stroke: 1300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 162 - Stroke: 1000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 163 - Stroke: 2300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 164 - Stroke: 3550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 165 - Stroke: 3550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 166 - Stroke: 450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 167 - Stroke: 3500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 168 - Stroke: 2100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 169 - Stroke: 3700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 170 - Stroke: 1800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 171 - Stroke: 2100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 172 - Stroke: 1550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 173 - Stroke: 3400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 174 - Stroke: 2500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 175 - Stroke: 2600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 176 - Stroke: 1800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 177 - Stroke: 100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 178 - Stroke: 1950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 179 - Stroke: 1200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 180 - Stroke: 1700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 181 - Stroke: 550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 182 - Stroke: 2500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 183 - Stroke: 2050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 184 - Stroke: 3000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 185 - Stroke: 700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 186 - Stroke: 1650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 187 - Stroke: 3200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 188 - Stroke: 850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 189 - Stroke: 2500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 190 - Stroke: 2800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 191 - Stroke: 3450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 192 - Stroke: 1200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 193 - Stroke: 2800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 194 - Stroke: 2450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 195 - Stroke: 1050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 196 - Stroke: 2200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 197 - Stroke: 1700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 198 - Stroke: 300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 199 - Stroke: 3650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 200 - Stroke: 2400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 201 - Stroke: 3650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 202 - Stroke: 600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 203 - Stroke: 1700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 204 - Stroke: 700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 205 - Stroke: 1900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 206 - Stroke: 2500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 207 - Stroke: 550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 208 - Stroke: 1850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 209 - Stroke: 500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 210 - Stroke: 850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 211 - Stroke: 3000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 212 - Stroke: 450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 213 - Stroke: 2700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 214 - Stroke: 500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 215 - Stroke: 3500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 216 - Stroke: 1400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 217 - Stroke: 1450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 218 - Stroke: 1200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 219 - Stroke: 1650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 220 - Stroke: 3050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 221 - Stroke: 2400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 222 - Stroke: 2550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 223 - Stroke: 1150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 224 - Stroke: 250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 225 - Stroke: 700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 226 - Stroke: 2900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 227 - Stroke: 1600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 228 - Stroke: 3850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 229 - Stroke: 3700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 230 - Stroke: 3000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 231 - Stroke: 2300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 232 - Stroke: 1850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 233 - Stroke: 1050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 234 - Stroke: 800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 235 - Stroke: 2100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 236 - Stroke: 3300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 237 - Stroke: 150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 238 - Stroke: 3400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 239 - Stroke: 2100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 240 - Stroke: 3300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 241 - Stroke: 2600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 242 - Stroke: 300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 243 - Stroke: 1750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 244 - Stroke: 600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 245 - Stroke: 1100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 246 - Stroke: 1150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 247 - Stroke: 2500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 248 - Stroke: 200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 249 - Stroke: 1500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 250 - Stroke: 2150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 251 - Stroke: 1500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 252 - Stroke: 1300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 253 - Stroke: 1000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 254 - Stroke: 1950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 255 - Stroke: 1900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 256 - Stroke: 200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 257 - Stroke: 1150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 258 - Stroke: 1300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 259 - Stroke: 3100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 260 - Stroke: 1500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 261 - Stroke: 2650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 262 - Stroke: 700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 263 - Stroke: 3350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 264 - Stroke: 1350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 265 - Stroke: 2250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 266 - Stroke: 2300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 267 - Stroke: 250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 268 - Stroke: 2900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 269 - Stroke: 3050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 270 - Stroke: 3100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 271 - Stroke: 2050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 272 - Stroke: 750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 273 - Stroke: 900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 274 - Stroke: 3100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 275 - Stroke: 300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 276 - Stroke: 1850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 277 - Stroke: 500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 278 - Stroke: 450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 279 - Stroke: 200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 280 - Stroke: 1900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 281 - Stroke: 700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 282 - Stroke: 550 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 283 - Stroke: 2700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 284 - Stroke: 850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 285 - Stroke: 3000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 286 - Stroke: 1800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 287 - Stroke: 3100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 288 - Stroke: 2800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 289 - Stroke: 2400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 290 - Stroke: 1650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 291 - Stroke: 1800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 292 - Stroke: 2850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 293 - Stroke: 2150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 294 - Stroke: 3750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 295 - Stroke: 3200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 296 - Stroke: 750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 297 - Stroke: 200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 298 - Stroke: 3050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 299 - Stroke: 300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 300 - Stroke: 3200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 301 - Stroke: 2500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 302 - Stroke: 3500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 303 - Stroke: 2000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 304 - Stroke: 2850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 305 - Stroke: 1650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 306 - Stroke: 2600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 307 - Stroke: 950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 308 - Stroke: 1500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 309 – Stroke: 3700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 310 – Stroke: 600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 311 – Stroke: 1950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 312 – Stroke: 2300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 313 – Stroke: 1350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 314 – Stroke: 450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 315 – Stroke: 1850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 316 – Stroke: 600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 317 – Stroke: 3400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 318 – Stroke: 2600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 319 – Stroke: 1050 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 320 – Stroke: 3600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 321 – Stroke: 700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 322 – Stroke: 650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 323 – Stroke: 250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 324 – Stroke: 2200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 325 – Stroke: 2600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 326 – Stroke: 1150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 327 – Stroke: 1900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 328 – Stroke: 900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 329 – Stroke: 350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 330 – Stroke: 2800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 331 – Stroke: 1400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 332 – Stroke: 1500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 333 – Stroke: 3750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 334 – Stroke: 2100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 335 – Stroke: 3900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 336 – Stroke: 1050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 337 – Stroke: 1400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 338 – Stroke: 3000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 339 – Stroke: 2200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 340 – Stroke: 650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 341 – Stroke: 3500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 342 – Stroke: 3800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 343 – Stroke: 3300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 344 – Stroke: 900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 345 – Stroke: 2300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 346 – Stroke: 2700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 347 – Stroke: 3700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 348 – Stroke: 1700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 349 – Stroke: 350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 350 – Stroke: 3600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 351 – Stroke: 1700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 352 – Stroke: 3150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 353 – Stroke: 3850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 354 – Stroke: 2950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 355 – Stroke: 1750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 356 – Stroke: 1600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 357 – Stroke: 1400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 358 – Stroke: 2450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 359 – Stroke: 1600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 360 – Stroke: 800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 361 – Stroke: 700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 362 – Stroke: 3400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 363 – Stroke: 3250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 364 – Stroke: 500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 365 – Stroke: 3900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 366 – Stroke: 750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 367 – Stroke: 3100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 368 – Stroke: 800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 369 – Stroke: 250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 370 – Stroke: 1050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 371 – Stroke: 150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 372 – Stroke: 1250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 373 – Stroke: 3300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 374 – Stroke: 3700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 375 – Stroke: 950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 376 – Stroke: 1400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 377 – Stroke: 2600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 378 – Stroke: 950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 379 – Stroke: 3150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 380 – Stroke: 2000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 381 - Stroke: 2850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 382 - Stroke: 250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 383 - Stroke: 1800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 384 - Stroke: 1100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 385 - Stroke: 3350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 386 - Stroke: 3400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 387 - Stroke: 1550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 388 - Stroke: 950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 389 - Stroke: 1900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 390 - Stroke: 2700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 391 - Stroke: 400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 392 - Stroke: 2750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 393 - Stroke: 550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 394 - Stroke: 1800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 395 - Stroke: 3250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 396 - Stroke: 1600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 397 - Stroke: 900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 398 - Stroke: 3700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 399 - Stroke: 600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 400 - Stroke: 1200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 401 - Stroke: 2300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 402 - Stroke: 2550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 403 - Stroke: 3400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 404 - Stroke: 550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 405 - Stroke: 1100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 406 - Stroke: 1300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 407 - Stroke: 2900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 408 - Stroke: 1850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 409 - Stroke: 1900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 410 - Stroke: 850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 411 - Stroke: 600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 412 - Stroke: 2800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 413 - Stroke: 2900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 414 - Stroke: 2850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 415 - Stroke: 2700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 416 - Stroke: 3800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 417 - Stroke: 1300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 418 - Stroke: 1200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 419 - Stroke: 400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 420 - Stroke: 3800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 421 - Stroke: 3800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 422 - Stroke: 2100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 423 - Stroke: 2500 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 424 - Stroke: 350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 425 - Stroke: 250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 426 - Stroke: 850 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 427 - Stroke: 2650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 428 - Stroke: 550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 429 - Stroke: 1600 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 430 - Stroke: 2750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 431 - Stroke: 1650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 432 - Stroke: 100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 433 - Stroke: 1450 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 434 - Stroke: 950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 435 - Stroke: 3800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 436 - Stroke: 200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 437 - Stroke: 1900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 438 - Stroke: 2500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 439 - Stroke: 2400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 440 - Stroke: 3100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 441 - Stroke: 500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 442 - Stroke: 1500 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 443 - Stroke: 2650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 444 - Stroke: 300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 445 - Stroke: 2200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 446 - Stroke: 1550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 447 - Stroke: 1700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 448 - Stroke: 2150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 449 - Stroke: 3150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 450 - Stroke: 3550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 451 - Stroke: 1050 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 452 - Stroke: 2450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 453 - Stroke: 3700 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 454 - Stroke: 2300 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 455 - Stroke: 2000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 456 - Stroke: 950 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 457 - Stroke: 1200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 458 - Stroke: 2800 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 459 - Stroke: 2000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 460 - Stroke: 750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 461 - Stroke: 3350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 462 - Stroke: 4000 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 463 - Stroke: 1700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 464 - Stroke: 150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 465 - Stroke: 1450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 466 - Stroke: 1800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 467 - Stroke: 250 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 468 - Stroke: 2400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 469 - Stroke: 400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 470 - Stroke: 3650 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 471 - Stroke: 3800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 472 - Stroke: 200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 473 - Stroke: 1150 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 474 - Stroke: 2200 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 475 - Stroke: 3650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 476 - Stroke: 1600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 477 - Stroke: 3300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 478 - Stroke: 2400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 479 - Stroke: 3400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 480 - Stroke: 2100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 481 - Stroke: 850 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 482 - Stroke: 2350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 483 - Stroke: 2550 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 484 - Stroke: 2950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 485 - Stroke: 700 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 486 - Stroke: 350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 487 - Stroke: 3350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 488 - Stroke: 2350 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 489 - Stroke: 900 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 490 - Stroke: 800 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 491 - Stroke: 1950 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 492 - Stroke: 2900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 493 - Stroke: 4000 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 494 - Stroke: 1150 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 495 - Stroke: 2750 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 496 - Stroke: 3250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 497 - Stroke: 1350 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 498 - Stroke: 1400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 499 - Stroke: 3600 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 500 - Stroke: 100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount

CONFIGURATION	MOTOR MOUNTING STYLE
Configuration 501 - Stroke: 650 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 502 - Stroke: 300 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 503 - Stroke: 100 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 504 - Stroke: 1400 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 505 - Stroke: 3250 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 506 - Stroke: 3100 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 507 - Stroke: 450 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 508 - Stroke: 900 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 509 - Stroke: 3750 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount
Configuration 510 - Stroke: 1400 mm; Motor mounting: Right side motor mount; Motor power: 400 W	Right side motor mount
Configuration 511 - Stroke: 3200 mm; Motor mounting: Left side motor mount; Motor power: 400 W	Left side motor mount

Overall Dimensions and Mounting Interface

- Confirm this exact SKU, the selected motor-mounting configuration and the applicable mechanical views before using dimensions or interface geometry.
- Keep mounting faces flat, clean and free of burrs, raised holes, debris and coating buildup.
- Reserve assembly, inspection, cable, lubrication and removal access around the module and motor interface.

Load Path and Installation Orientation

- Route axial force through the carriage, supported mounting structure and host guide; include offset, side load, acceleration, shock and emergency-stop cases.
- Validate horizontal, wall and vertical installation loads with the actual payload center, guide spacing, host stiffness and duty cycle.
- Control payload center of gravity and overhung moment; verify the complete installed load path rather than inferring capacity from module mass or size.

Motion and Duty-Cycle Validation

- Validate the complete acceleration, travel, dwell, reversal and stop cycle using the stroke and selected motor configuration.
- Establish speed, acceleration, payload and moment limits from the complete selected module, motor, guide and host calculation.
- Verify temperature and resonance behavior using the installed motor, stroke, load, mounting heat path and operating cycle.

Motor, Coupling and Sensor Integration

PARAMETER	VALUE	UNIT
Configured Motor Power	400	W

- Match the motor mounting style, adapter, configured motor power and interface dimensions before assembly.
- Verify coupling bore, engagement, concentricity, axial position and tightening controls, then check smooth travel at zero energy.
- Provide cable slack, bend radius, strain relief and sensor clearance across the complete motion envelope.

Maintenance, Contamination and Service Envelope

- Prevent chips, fibers, cleaning residue and moisture from entering the ball screw, guide, sensor and coupling interfaces.
- Provide access for lubrication, inspection, sensor adjustment, fastener verification and specified removal.
- Stop and inspect after binding, impact, abnormal noise, rising temperature, unexpected friction or protection damage.

Commissioning and Safety

- Commission in stages with the host guide, limits, guards and cable routing installed; verify each boundary before increasing speed or load.
- At low energy verify travel direction, home and limit behavior, command polarity, stroke and sensor state.
- Verify emergency stop, fault response, recovery behavior and safe holding requirements for the installed orientation.

Integration Checklist

- 01 Confirm the exact SKU, parameters and selected mechanical-view configuration.
- 02 Verify working stroke, overall length, module mass, mounting-hole count and service clearance.
- 03 Establish the complete axial, side-load and moment load path for the host structure.
- 04 Validate horizontal, wall and vertical installation cases using the actual payload center and duty cycle.
- 05 Match motor mounting style, configured motor power, adapter and coupling dimensions.
- 06 Verify coupling alignment, engagement, tightening and smooth travel before applying drive power.
- 07 Provide cable slack, bend radius, strain relief and sensor clearance across the full motion envelope.
- 08 Protect the ball screw, guide, sensors and coupling from contamination and moisture.
- 09 At low energy verify direction, home, limits, stroke, speed and fault-stop behavior.
- 10 Request current 2D, STEP, motor-interface, wiring, lubrication and maintenance data before final integration.

[View SKU Product Datasheet](#) [Request controlled 2D drawing](#) [Request controlled STEP review](#) [Request a Quote](#)

Engineering Use and Verification Notice

01. This Dimensional & Integration Guide applies only to EmbodyStack SKU ES-LA-S06-P01 and is intended for dimensional evaluation and preliminary integration. It is not a applicable manufacturing drawing, module or motor selection approval, payload or safety approval, wiring final integration, machinery risk assessment or integration planning document and must not be used as the sole basis for machining, host-structure design, coupling manufacture, fastener selection, cable assembly or final integration. Before design freeze, assembly or commissioning, verify dimensions, interface geometry, mounting holes, travel and collision envelope, load path, orientation, payload center, speed, acceleration, motor, adapter, coupling, sensors, cable routing, limits, thermal behavior, contamination control and maintenance requirements against the applicable EmbodyStack engineering data for this exact SKU and selected configuration. Where this guide and applicable product documentation differ, the applicable product documentation governs. Validate the complete module, motor, guide, host structure, motion cycle, guarding, fault cases and applicable regulatory requirements under intended operating conditions.