ENGINEERING DOCUMENTATION

Rotary Servo Motor

Dimensional & Integration Guide

DOCUMENT	REVISION / ISSUE	STATUS
DIG-ES-SM-A01-130D-T7P16NM-1500W-002	DRAFT-08 / 27 Aug 2026	Engineering Integration Reference

Integration Overview

Closed-loop rotary servo motor for specified motion axes. This guide supports mechanical mounting, shaft and coupling integration, feedback and brake planning, cable routing, thermal validation and staged commissioning.

Key Integration Facts

INTEGRATION ITEM	PUBLISHED VALUE
Rated Torque	7.16 N·m
Rated Speed	2000 rpm
Flange Size	130 mm

Product Structure & Views

These views present product structure, mounting interfaces and relevant integration geometry for this SKU.

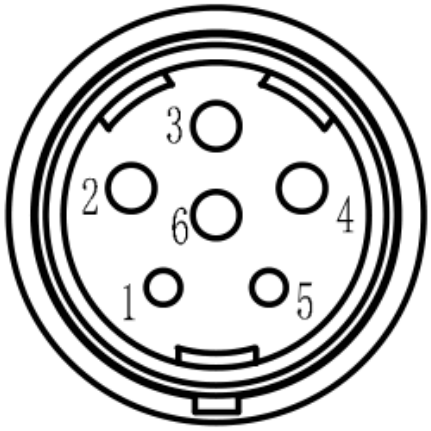

Mechanical View 4

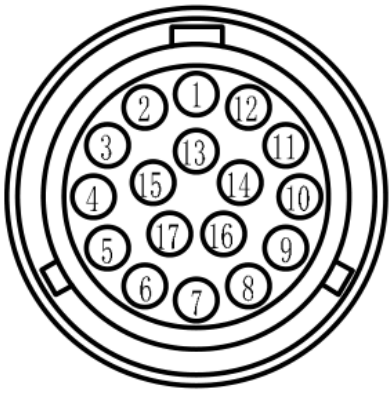

Mechanical View 5

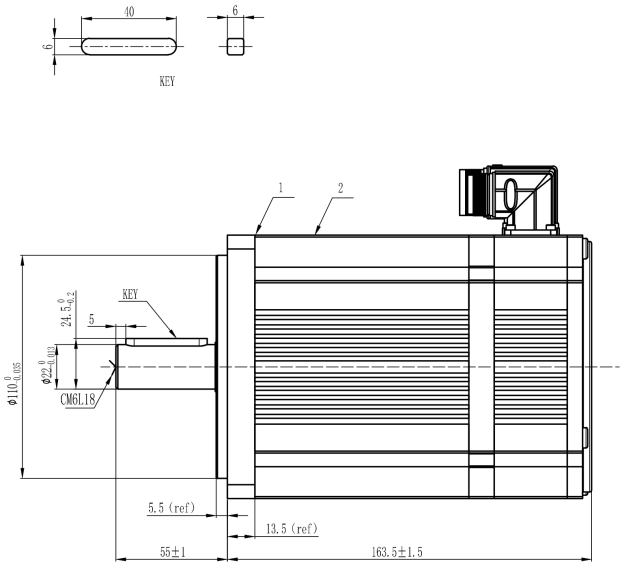

Mechanical View 6

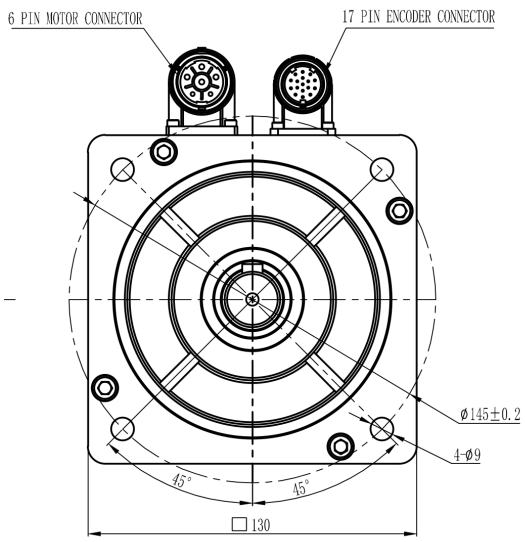

Mechanical View 7

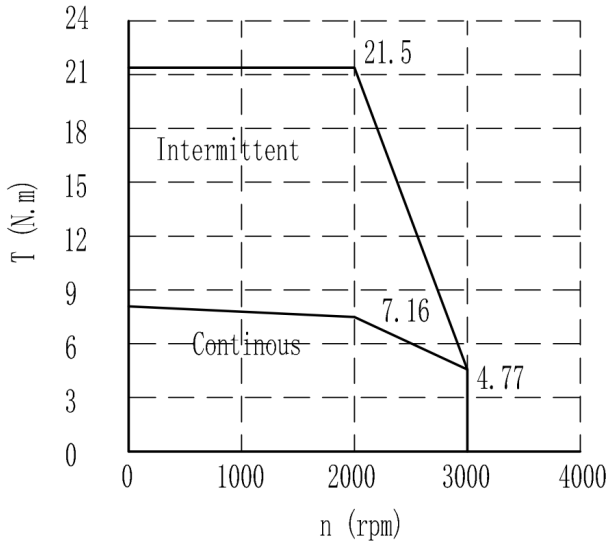

Mechanical View 9

VIEW	FIELD	VALUE
Mechanical View 4	Pin number 1	Pin 1
	Pin number 2	Pin 2
	Pin number 3	Pin 3
	Pin number 4	Pin 4
	Pin number 5	Pin 5
	Pin number 6	Pin 6
Mechanical View 5	Feedback connector pin 1	Pin 1
	Feedback connector pin 2	Pin 2
	Feedback connector pin 3	Pin 3
	Feedback connector pin 4	Pin 4
	Feedback connector pin 5	Pin 5
	Feedback connector pin 6	Pin 6
	Feedback connector pin 7	Pin 7
	Feedback connector pin 8	Pin 8
	Feedback connector pin 9	Pin 9
	Feedback connector pin 10	Pin 10
	Feedback connector pin 11	Pin 11
	Feedback connector pin 12	Pin 12
	Feedback connector pin 13	Pin 13
	Feedback connector pin 14	Pin 14
	Feedback connector pin 15	Pin 15
	Feedback connector pin 16	Pin 16
	Feedback connector pin 17	Pin 17
Mechanical View 6	Key length	40 mm
	Key width	6 mm
	Part label 1	Part callout 1
	Part label 2	Part callout 2
	Key depth with tolerance	24.5 mm 0/-0.2
	Key depth	5 mm
	Shaft outer diameter with tolerance	Ø22 mm 0/-0.013
	Overall outer diameter with tolerance	Ø110 mm 0/-0.035
	Mounting dimension (reference)	5.5 mm (reference)
	Mounting dimension (reference)	13.5 mm (reference)
	Mounting length with tolerance	55±1 mm
	Overall length with tolerance	163.5±1.5 mm
	Keyway width	6

VIEW	FIELD	VALUE
Key feature label	Key feature label	
Mechanical View 7	Encoder Connector	17-pin encoder connector
	Motor Connector	6-pin motor connector
	Mounting Hole Pitch Circle Diameter	ϕ145±0.2
	Mounting Hole Diameter and Quantity	4×ϕ9
	Mounting Hole Angular Position 1	45°
	Mounting Hole Angular Position 2	45°
	Flange Side Length	130×130
Mechanical View 9	Torque-Speed Curve Y-axis Maximum Scale	24 N.m
	Intermittent Duty Rated Torque	21.5 N.m
	Torque-Speed Curve Y-axis Scale	21 N.m
	Torque-Speed Curve Y-axis Scale	18 N.m
	Duty Mode Label	Intermittent
	Torque-Speed Curve Y-axis Scale	15 N.m
	Torque-Speed Curve Y-axis Scale	12 N.m
	Torque-Speed Curve Y-axis Scale	9 N.m
	Torque Value Callout	7.16 N.m
	Duty Mode Label	Continuous
	Torque-Speed Curve Y-axis Scale	6 N.m
	Continuous Duty Rated Torque	4.77 N.m
	Torque-Speed Curve Y-axis Scale	3 N.m
	Torque-Speed Curve Y-axis Minimum Scale	0 N.m
	Speed Scale	1000 rpm
	Speed Scale	2000 rpm
	Speed Scale	3000 rpm
	Speed Scale Maximum	4000 rpm
	X-axis Parameter Symbol	n
	X-axis Parameter Unit	(rpm)
	Y-axis Parameter	T (N.m)

Overall Dimensions and Mounting Interface

PARAMETER	PUBLISHED VALUE	UNIT
Flange Size	130	mm

- Confirm the mounting face, locating feature, shaft geometry, fastener engagement and removal clearance against the applicable exact-SKU drawing.
- Mount the motor on a flat, rigid interface and avoid using fasteners to pull a misaligned assembly into position.

Shaft, Coupling and Load Path

PARAMETER	PUBLISHED VALUE	UNIT
Rotor Inertia	15.95	kg·cm²

- Align the driven shaft and coupling before tightening; validate radial, axial and moment loads against applicable bearing-load data.
- Do not hammer, uncontrolled press-fit or transmit installation force through the motor bearings.

Electrical, Feedback and Brake Integration

PARAMETER	PUBLISHED VALUE	UNIT
Position Feedback Device	Single-turn communication magnetic encoder	

- Use only the current winding, feedback, brake and connector definitions for this exact SKU.
- Verify drive compatibility, polarity, current limits, feedback direction and brake sequencing before enabling torque.

Thermal, Duty and Environmental Conditions

PARAMETER	PUBLISHED VALUE	UNIT
Rated Torque	7.16	N·m
Operating Temperature	20 40	°C

- Validate winding and housing temperature under the installed duty cycle, ambient condition, mounting heat path and enclosure airflow.
- Published peak values are transient boundaries and must not be treated as continuous operating ratings.

Cable Routing, Grounding and EMC

PARAMETER	PUBLISHED VALUE	UNIT
Position Feedback Device	Single-turn communication magnetic encoder	

- Provide strain relief and bend radius through the full machine motion envelope.
- Separate motor power, brake and feedback wiring and terminate shields according to the specified system grounding architecture.

Commissioning and Motion Validation

PARAMETER	PUBLISHED VALUE	UNIT
Rated Speed	2000	rpm
Rated Torque	7.16	N·m

- Commission at low energy with the transmission unloaded or safely restrained, then confirm direction, feedback polarity, brake final integration, current limit and fault response.
- Validate the complete axis through intended acceleration, speed, load, stop and fault cycles during integration planning.

Integration Checklist

01	Confirm the exact SKU, 2D drawing and applicable wiring data.
02	Verify mounting, shaft, coupling, alignment, fasteners and removal clearance.
03	Validate radial and axial loads, inertia, acceleration and credible shock cases.
04	Confirm drive, winding, feedback, brake and connector compatibility.
05	Set current, speed, acceleration and thermal limits from the installed duty cycle.
06	Verify cable routing, shielding, grounding, strain relief and bend radius.
07	Commission at low energy before validating the full machine cycle.

View SKU Product Datasheet Request controlled 2D drawing Request controlled STEP review Request a Quote

Engineering Use and Verification Notice

01. This Dimensional & Integration Guide applies only to EmbodyStack SKU ES-SM-A01-130D-T7P16NM-1500W-002 and is intended for dimensional evaluation and preliminary integration. It is not a applicable manufacturing drawing, wiring definition, application approval, machinery risk assessment, safety validation or integration planning document. Before design freeze, machining, wiring or energization, verify all dimensions, tolerances, mounting and locating features, load boundaries, electrical interfaces, thermal conditions, cabling, grounding, protection, commissioning and applicable regulatory requirements against the applicable EmbodyStack engineering data for this exact SKU. Where this guide and applicable product documentation differ, the applicable product documentation governs. Validate the complete installed system under intended duty cycles, loads, accelerations, environmental conditions and credible fault cases.