

ENGINEERING DOCUMENTATION

Rotary Servo Motor

Dimensional & Integration Guide

DOCUMENT	REVISION / ISSUE	STATUS
DIG-ES-SM-A01-130D-T7P16NM-1500W-011	DRAFT-08 / 27 Aug 2026	Engineering Integration Reference

Integration Overview


Closed-loop rotary servo motor for specified motion axes. This guide supports mechanical mounting, shaft and coupling integration, feedback and brake planning, cable routing, thermal validation and staged commissioning.

Key Integration Facts


INTEGRATION ITEM	PUBLISHED VALUE
Rated Torque	7.16 Nm
Rated Speed	2000 rpm
Flange Size	130 mm

Product Structure & Views


These views present product structure, mounting interfaces and relevant integration geometry for this SKU.

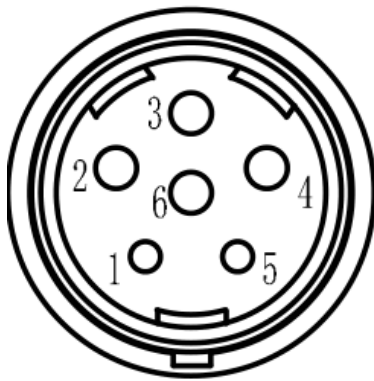


Mechanical View 3




Mechanical View 4

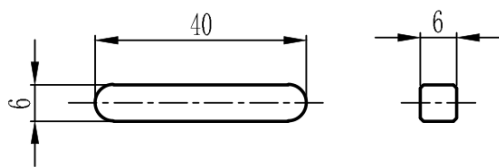


Mechanical View 6

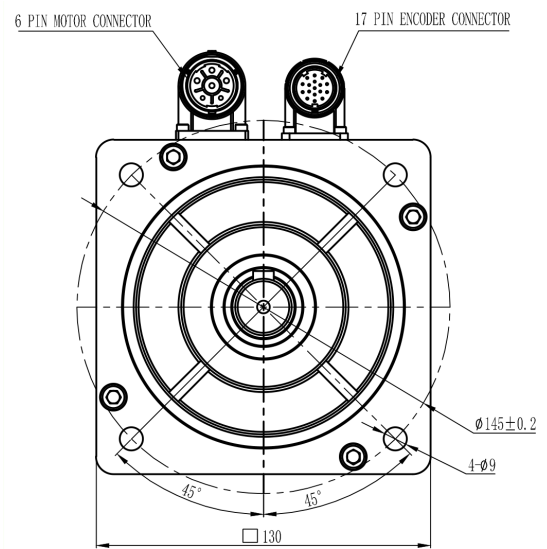

Mechanical View 7

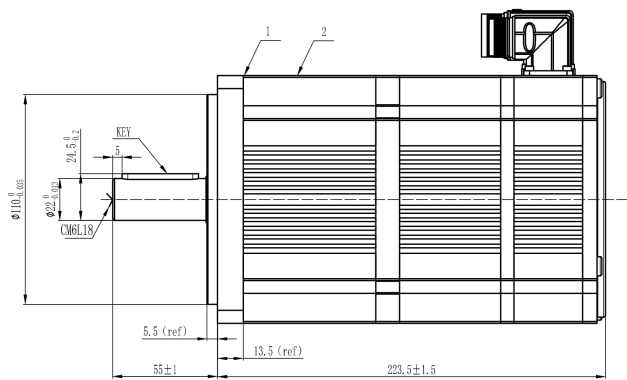

Mechanical View 8

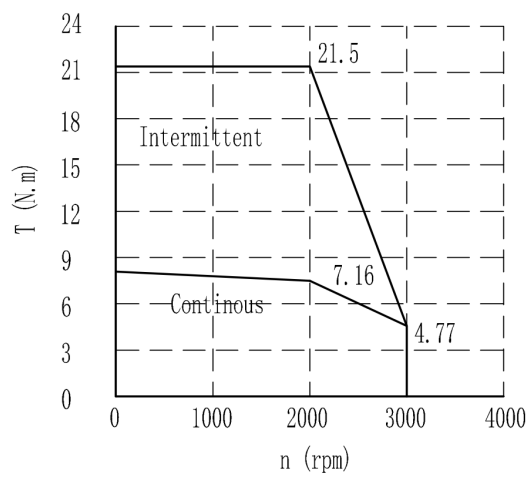

Mechanical View 10

VIEW	FIELD	VALUE
Mechanical View 3	Connector pin number 3	Pin 3 identifier
	Connector pin number 2	Pin 2 identifier
	Connector pin number 6	Pin 6 identifier
	Connector pin number 4	Pin 4 identifier
	Connector pin number 1	Pin 1 identifier
	Connector pin number 5	Pin 5 identifier
Mechanical View 4	Feedback connector pin number 2	Pin 2
	Feedback connector pin number 12	Pin 12
	Feedback connector pin number 3	Pin 3
	Feedback connector pin number 13	Pin 13
	Feedback connector pin number 14	Pin 14
	Feedback connector pin number 15	Pin 15
	Feedback connector pin number 10	Pin 10
	Feedback connector pin number 16	Pin 16
	Feedback connector pin number 17	Pin 17
	Feedback connector pin number 5	Pin 5
	Feedback connector pin number 6	Pin 6
	Feedback connector pin number 1	Pin 1
	Feedback connector pin number 4	Pin 4
	Feedback connector pin number 7	Pin 7
	Feedback connector pin number 8	Pin 8
	Feedback connector pin number 9	Pin 9
	Feedback connector pin number 11	Pin 11
Mechanical View 6	Key length	Key length 40 mm
	Key width	Key width 6 mm
	Key height	Key height 6 mm
	Key feature label	Key feature
Mechanical View 7	Motor connector	6-pin motor connector
	Encoder connector	17-pin encoder connector
	Mounting hole pitch circle diameter	Diameter 145 ±0.2
	Mounting hole quantity and diameter	4 holes, diameter 9
	Mounting hole angular position	45 degrees
	Square mounting flange size	130
Mechanical View 8	Component label 1	Label 1
	Component label 2	Label 2
	Key feature label	KEY

VIEW	FIELD	VALUE
Keyway related height or depth dimension	24.5 +0/-0.2	
Key width	5	
Shaft diameter	Diameter 22 +0/-0.013	
Outer diameter	Diameter 110 +0/-0.035	
Shaft end thread specification	CM6L18	
Reference shoulder distance	5.5 reference	
Reference axial distance	13.5 reference	
Overall body length	223.5 ±1.5	
Shaft extension length	55 ±1	
Mechanical View 10	Torque axis label and unit	Torque T in N.m
	Speed axis label and unit	Rotational speed n in rpm
	Intermittent operation curve label	Intermittent operation curve
	Continuous operation curve label	Continuous operation curve
	Intermittent stall torque	21.5 N.m
	Continuous stall torque	7.16 N.m
	Torque at 3000 rpm	4.77 N.m at 3000 rpm
	Torque axis tick values	Torque ticks: 0, 3, 6, 9, 12, 15, 18, 21, 24
	Speed axis tick values	Speed ticks: 0, 1000, 2000, 3000, 4000 rpm

Overall Dimensions and Mounting Interface

PARAMETER	PUBLISHED VALUE	UNIT
Flange Size	130	mm

- Confirm the mounting face, locating feature, shaft geometry, fastener engagement and removal clearance against the applicable exact-SKU drawing.
- Mount the motor on a flat, rigid interface and avoid using fasteners to pull a misaligned assembly into position.

Shaft, Coupling and Load Path

PARAMETER	PUBLISHED VALUE	UNIT
Rotor Inertia	16.95	kgcm ²

- Align the driven shaft and coupling before tightening; validate radial, axial and moment loads against applicable bearing-load data.
- Do not hammer, uncontrolled press-fit or transmit installation force through the motor bearings.

Electrical, Feedback and Brake Integration

PARAMETER	PUBLISHED VALUE	UNIT
Position Feedback Device	Single-turn communication optical encoder	

- Use only the current winding, feedback, brake and connector definitions for this exact SKU.
- Verify drive compatibility, polarity, current limits, feedback direction and brake sequencing before enabling torque.

Thermal, Duty and Environmental Conditions

PARAMETER	PUBLISHED VALUE	UNIT
Rated Torque	7.16	Nm
Operating Temperature	20 40	°C

- Validate winding and housing temperature under the installed duty cycle, ambient condition, mounting heat path and enclosure airflow.
- Published peak values are transient boundaries and must not be treated as continuous operating ratings.

Cable Routing, Grounding and EMC

PARAMETER	PUBLISHED VALUE	UNIT
Position Feedback Device	Single-turn communication optical encoder	

- Provide strain relief and bend radius through the full machine motion envelope.
- Separate motor power, brake and feedback wiring and terminate shields according to the specified system grounding architecture.

Commissioning and Motion Validation

PARAMETER	PUBLISHED VALUE	UNIT
Rated Speed	2000	rpm
Rated Torque	7.16	Nm

- Commission at low energy with the transmission unloaded or safely restrained, then confirm direction, feedback polarity, brake final integration, current limit and fault response.
- Validate the complete axis through intended acceleration, speed, load, stop and fault cycles during integration planning.

Integration Checklist

- | | |
|----|--|
| 01 | Confirm the exact SKU, 2D drawing and applicable wiring data. |
| 02 | Verify mounting, shaft, coupling, alignment, fasteners and removal clearance. |
| 03 | Validate radial and axial loads, inertia, acceleration and credible shock cases. |
| 04 | Confirm drive, winding, feedback, brake and connector compatibility. |
| 05 | Set current, speed, acceleration and thermal limits from the installed duty cycle. |
| 06 | Verify cable routing, shielding, grounding, strain relief and bend radius. |
| 07 | Commission at low energy before validating the full machine cycle. |

[View SKU Product Datasheet](#) [Request controlled 2D drawing](#) [Request controlled STEP review](#) [Request a Quote](#)

Engineering Use and Verification Notice

01. This Dimensional & Integration Guide applies only to EmbodyStack SKU ES-SM-A01-130D-T7P16NM-1500W-011 and is intended for dimensional evaluation and preliminary integration. It is not a applicable manufacturing drawing, wiring definition, application approval, machinery risk assessment, safety validation or integration planning document. Before design freeze, machining, wiring or energization, verify all dimensions, tolerances, mounting and locating features, load boundaries, electrical interfaces, thermal conditions, cabling, grounding, protection, commissioning and applicable regulatory requirements against the applicable EmbodyStack engineering data for this exact SKU. Where this guide and applicable product documentation differ, the applicable product documentation governs. Validate the complete installed system under intended duty cycles, loads, accelerations, environmental conditions and credible fault cases.