

ENGINEERING DOCUMENTATION

Rotary Servo Motor

Dimensional & Integration Guide

DOCUMENT	REVISION / ISSUE	STATUS
DIG-ES-SM-A01-130D-T9P55NM-2000W-016	DRAFT-08 / 27 Aug 2026	Engineering Integration Reference

Integration Overview


Closed-loop rotary servo motor for specified motion axes. This guide supports mechanical mounting, shaft and coupling integration, feedback and brake planning, cable routing, thermal validation and staged commissioning.

Key Integration Facts


INTEGRATION ITEM	PUBLISHED VALUE
Rated Torque	9.55 N·m
Rated Speed	2000 rpm
Flange Size	130 mm

Product Structure & Views


These views present product structure, mounting interfaces and relevant integration geometry for this SKU.

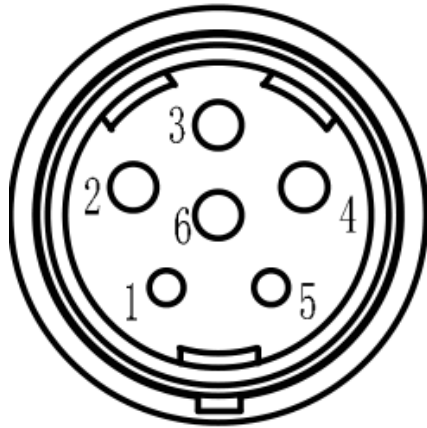


Mechanical View 4

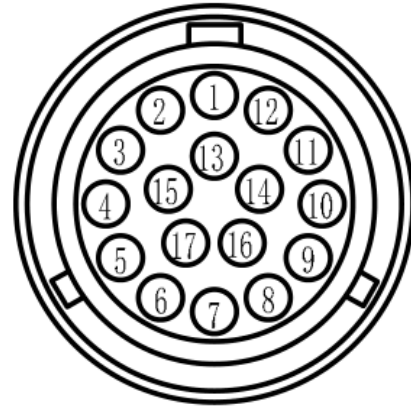


Mechanical View 6

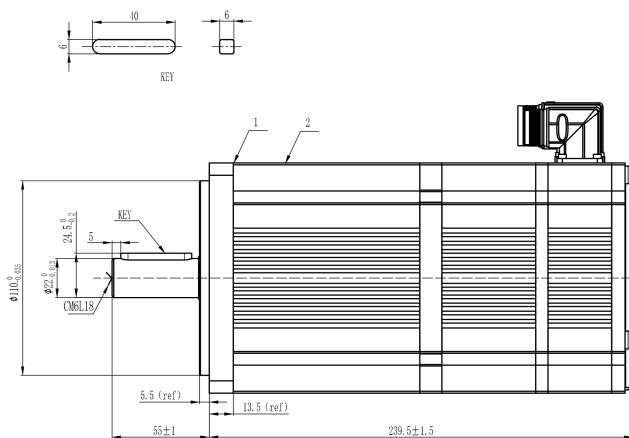

Mechanical View 7

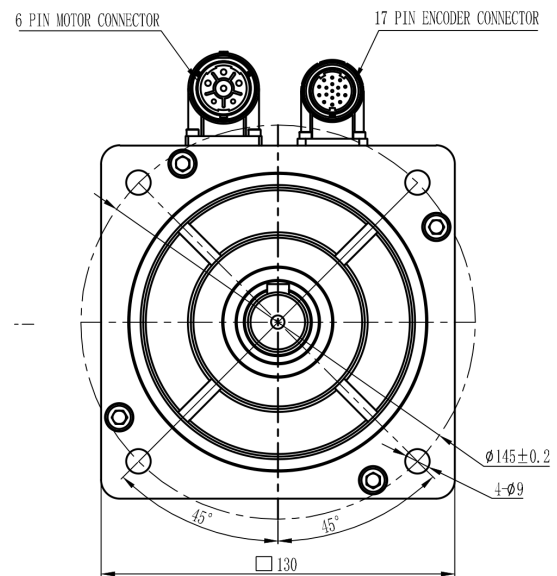

Mechanical View 8

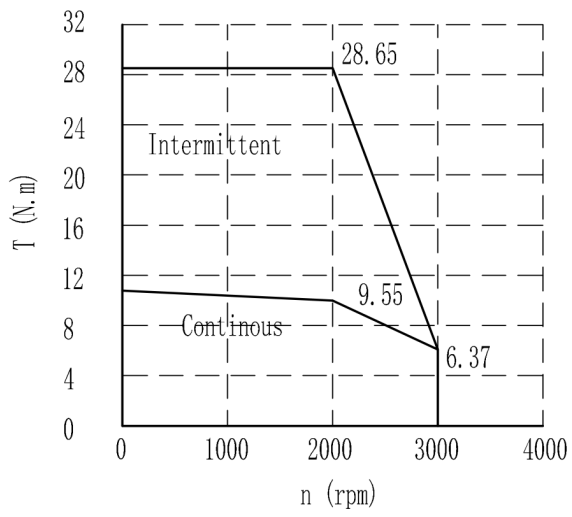

Mechanical View 10

VIEW	FIELD	VALUE
Mechanical View 4	Pin number	Pin 3
	Pin number	Pin 2
	Pin number	Pin 6
	Pin number	Pin 4
	Pin number	Pin 5
	Pin number	Pin 1
Mechanical View 6	Feedback connector pin 1 label	Pin 1
	Feedback connector pin 2 label	Pin 2
	Feedback connector pin 12 label	Pin 12
	Feedback connector pin 13 label	Pin 13
	Feedback connector pin 15 label	Pin 15
	Feedback connector pin 14 label	Pin 14
	Feedback connector pin 10 label	Pin 10
	Feedback connector pin 16 label	Pin 16
	Feedback connector pin 17 label	Pin 17
	Feedback connector pin 5 label	Pin 5
	Feedback connector pin 9 label	Pin 9
	Feedback connector pin 8 label	Pin 8
	Feedback connector pin 6 label	Pin 6
	Feedback connector pin 7 label	Pin 7
	Feedback connector pin 11 label	Pin 11
	Encoder connector pin number	Pin 3
	Encoder connector pin number	Pin 4
Mechanical View 7	Key cross-section height	6 mm
	Key length	40 mm
	Key width	6 mm
	Key label	Key
	Part callout 1	Item 1
	Part callout 2	Item 2
	Shaft keyway label	Keyway indicated
	Shaft shoulder or keyway related vertical dimension	24.5 mm +0/-0.2
	Shaft keyway width	5 mm
	Output shaft diameter	Diameter 22 mm +0/-0.013
	Mounting pilot diameter	Diameter 110 mm +0/-0.035
	Thread or hole callout	CM6L18
	Reference offset dimension	5.5 mm reference

VIEW	FIELD	VALUE
Reference end offset dimension	13.5 mm reference	
Main body length	239.5 mm ±1.5	
Output shaft extension length	55 mm ±1	
Mechanical View 8	17-pin encoder connector	17-pin encoder connector
	6-pin motor connector	6-pin motor connector
	Mounting hole pitch circle diameter	Diameter 145 ±0.2
	Mounting hole quantity and diameter	4 holes, diameter 9
	Mounting hole angular position	Mounting holes positioned at 45 degrees on both sides
	Square mounting flange envelope size	Square 130
Mechanical View 10	Y-axis: Torque	T (N.m)
	X-axis: Speed	n (rpm)
	Intermittent operation curve label	Intermittent
	Continuous operation curve label	Continuous
	Intermittent curve data point (torque at 2000 rpm)	28.65 N.m
	Continuous curve data point (torque at 2000 rpm)	9.55 N.m
	Continuous curve data point (torque at 3000 rpm)	6.37 N.m
	Torque Scale	0–32 N.m
	Motor Speed Scale	0–4000 rpm

Overall Dimensions and Mounting Interface

PARAMETER	PUBLISHED VALUE	UNIT
Flange Size	130	mm

- Confirm the mounting face, locating feature, shaft geometry, fastener engagement and removal clearance against the applicable exact-SKU drawing.
- Mount the motor on a flat, rigid interface and avoid using fasteners to pull a misaligned assembly into position.

Shaft, Coupling and Load Path

PARAMETER	PUBLISHED VALUE	UNIT
Rotor Inertia	21.25	kgcm ²

- Align the driven shaft and coupling before tightening; validate radial, axial and moment loads against applicable bearing-load data.
- Do not hammer, uncontrolled press-fit or transmit installation force through the motor bearings.

Electrical, Feedback and Brake Integration

PARAMETER	PUBLISHED VALUE	UNIT
Position Feedback Device	23-bit multi-turn communication optical absolute encoder	

- Use only the current winding, feedback, brake and connector definitions for this exact SKU.
- Verify drive compatibility, polarity, current limits, feedback direction and brake sequencing before enabling torque.

Thermal, Duty and Environmental Conditions

PARAMETER	PUBLISHED VALUE	UNIT
Rated Torque	9.55	Nm
Operating Temperature	20 40	°C

- Validate winding and housing temperature under the installed duty cycle, ambient condition, mounting heat path and enclosure airflow.
- Published peak values are transient boundaries and must not be treated as continuous operating ratings.

Cable Routing, Grounding and EMC

PARAMETER	PUBLISHED VALUE	UNIT
Position Feedback Device	23-bit multi-turn communication optical absolute encoder	

- Provide strain relief and bend radius through the full machine motion envelope.
- Separate motor power, brake and feedback wiring and terminate shields according to the specified system grounding architecture.

Commissioning and Motion Validation

PARAMETER	PUBLISHED VALUE	UNIT
Rated Speed	2000	rpm
Rated Torque	9.55	Nm

- Commission at low energy with the transmission unloaded or safely restrained, then confirm direction, feedback polarity, brake final integration, current limit and fault response.
- Validate the complete axis through intended acceleration, speed, load, stop and fault cycles during integration planning.

Integration Checklist

- | | |
|----|--|
| 01 | Confirm the exact SKU, 2D drawing and applicable wiring data. |
| 02 | Verify mounting, shaft, coupling, alignment, fasteners and removal clearance. |
| 03 | Validate radial and axial loads, inertia, acceleration and credible shock cases. |
| 04 | Confirm drive, winding, feedback, brake and connector compatibility. |
| 05 | Set current, speed, acceleration and thermal limits from the installed duty cycle. |
| 06 | Verify cable routing, shielding, grounding, strain relief and bend radius. |
| 07 | Commission at low energy before validating the full machine cycle. |

[View SKU Product Datasheet](#) [Request controlled 2D drawing](#) [Request controlled STEP review](#) [Request a Quote](#)

Engineering Use and Verification Notice

01. This Dimensional & Integration Guide applies only to EmbodyStack SKU ES-SM-A01-130D-T9P55NM-2000W-016 and is intended for dimensional evaluation and preliminary integration. It is not a applicable manufacturing drawing, wiring definition, application approval, machinery risk assessment, safety validation or integration planning document. Before design freeze, machining, wiring or energization, verify all dimensions, tolerances, mounting and locating features, load boundaries, electrical interfaces, thermal conditions, cabling, grounding, protection, commissioning and applicable regulatory requirements against the applicable EmbodyStack engineering data for this exact SKU. Where this guide and applicable product documentation differ, the applicable product documentation governs. Validate the complete installed system under intended duty cycles, loads, accelerations, environmental conditions and credible fault cases.