

ENGINEERING DOCUMENTATION

Rotary Servo Motor

Dimensional & Integration Guide

DOCUMENT	REVISION / ISSUE	STATUS
DIG-ES-SM-A03-040-TOP32NM-100W-001	DRAFT-08 / 27 Aug 2026	Engineering Integration Reference

Integration Overview


Closed-loop rotary servo motor for specified motion axes. This guide supports mechanical mounting, shaft and coupling integration, feedback and brake planning, cable routing, thermal validation and staged commissioning.

Key Integration Facts



INTEGRATION ITEM	PUBLISHED VALUE
Rated Torque	0.32 Nm
Rated Speed	3000 rpm
Rated Voltage	220 VAC
Flange Size	40 mm

Product Structure & Views


These views present product structure, mounting interfaces and relevant integration geometry for this SKU.

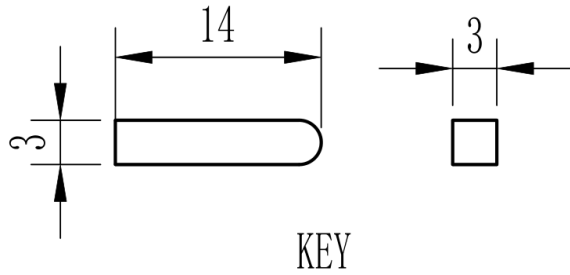


Mechanical View 1

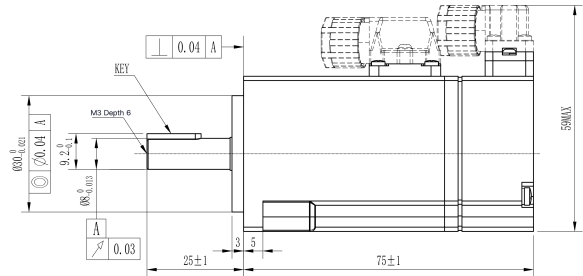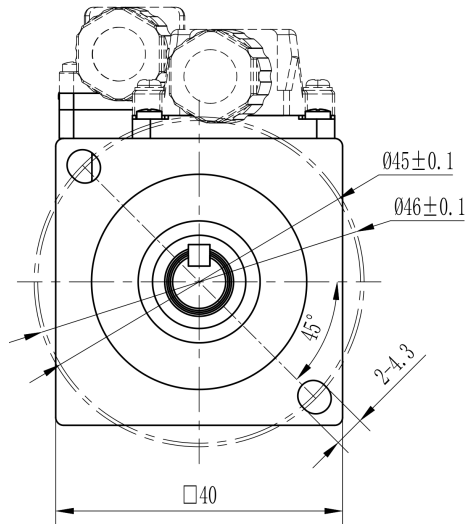


Mechanical View 3

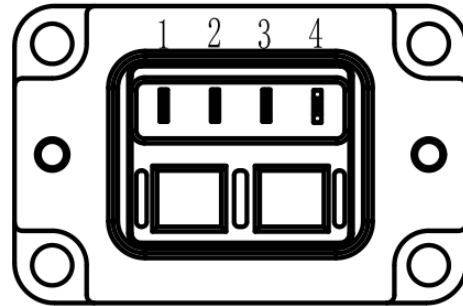

Mechanical View 5

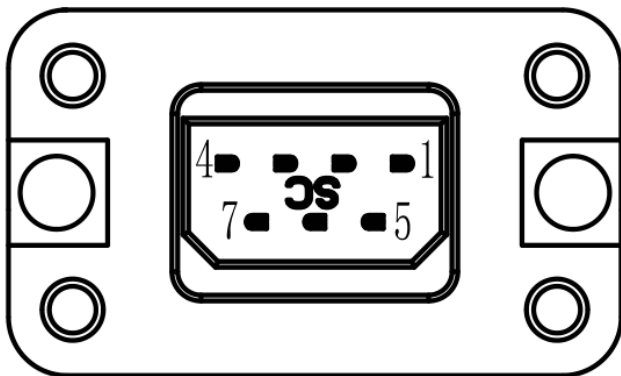

Mechanical View 8

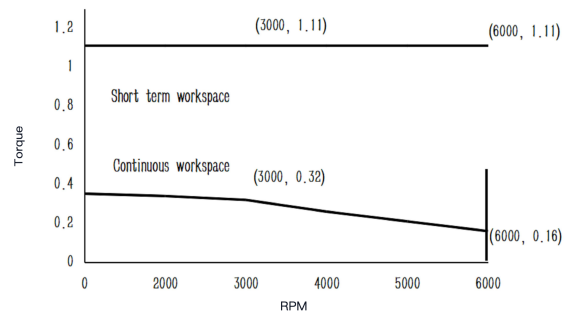

Mechanical View 10

VIEW	FIELD	VALUE
Mechanical View 1	Key length	Key length 14 mm
	Key width	Key width 3 mm
	Key height	Key height 3 mm
	Key label	KEY
Mechanical View 2	Perpendicularity tolerance	Perpendicularity tolerance 0.04 relative to datum A
	Key feature label	Key feature indicated
	M3 threaded hole depth	M3 thread depth 6
	Maximum overall height	Maximum height 59
	Main shaft diameter	Diameter 30 with upper deviation 0 and lower deviation -0.021
	Geometric tolerance for shaft feature	Cylindrical geometric tolerance diameter 0.04 relative to datum A
	Key feature height dimension	9.2 with upper deviation 0 and lower deviation -0.1
	Small shaft diameter	Diameter 8 with upper deviation 0 and lower deviation -0.013
	Datum A	Datum A indicated
	Step length	Length 3
	Step length	Length 5
	Geometric tolerance value	Geometric tolerance value 0.03; characteristic symbol not OCR captured
	Main body length	Length 75 ±1
	Front shaft extension length	Length 25 ±1
Mechanical View 3	Diameter 45 fit dimension	Diameter 45 ±0.1
	Diameter 46 fit dimension	Diameter 46 ±0.1
	Square mounting size	Square 40
	Mounting hole angular position	45 degrees
	Mounting Holes	2-4.3
Mechanical View 5	Connector terminal numbers 1 to 3	Connector terminals labeled 1, 2, and 3
	Connector terminal number 4	Connector terminal labeled 4
Mechanical View 8	Connector right-side pin numbers	Pin labels 1 and 5
	Connector pin number	Pin label: 4
	Connector pin number	Pin label: 7
Mechanical View 10	Torque axis label	Torque
	Speed axis label	Rotational speed in rpm
	Short-term workspace region label	Short-term operating region
	Continuous workspace region label	Continuous operating region
	Maximum torque plateau point at 3000 rpm	Speed 3000 rpm, torque 1.11
	Maximum torque plateau point at 6000 rpm	Speed 6000 rpm, torque 1.11
	Continuous torque point at 3000 rpm	Speed 3000 rpm, torque 0.32

VIEW	FIELD	VALUE
Continuous torque point at 6000 rpm	Speed 6000 rpm, torque 0.16	
Torque axis tick values	Torque scale ticks: 0 to 1.2	
Speed axis tick values	Speed scale ticks: 0, 2000, 3000, 4000, 5000, 6000 rpm	

Overall Dimensions and Mounting Interface

PARAMETER	PUBLISHED VALUE	UNIT
Flange Size	40	mm

- Confirm the mounting face, locating feature, shaft geometry, fastener engagement and removal clearance against the applicable exact-SKU drawing.
- Mount the motor on a flat, rigid interface and avoid using fasteners to pull a misaligned assembly into position.

Shaft, Coupling and Load Path

PARAMETER	PUBLISHED VALUE	UNIT
Rotor Inertia	0.046 ()	Kg·cm ²

- Align the driven shaft and coupling before tightening; validate radial, axial and moment loads against applicable bearing-load data.
- Do not hammer, uncontrolled press-fit or transmit installation force through the motor bearings.

Electrical, Feedback and Brake Integration

PARAMETER	PUBLISHED VALUE	UNIT
Rated Voltage	220	VAC
Position Feedback Device	17-bit multi-turn communication magnetic absolute encoder	

- Use only the current winding, feedback, brake and connector definitions for this exact SKU.
- Verify drive compatibility, polarity, current limits, feedback direction and brake sequencing before enabling torque.

Thermal, Duty and Environmental Conditions

PARAMETER	PUBLISHED VALUE	UNIT
Rated Torque	0.32	Nm
Operating Temperature	-20 40	°C

- Validate winding and housing temperature under the installed duty cycle, ambient condition, mounting heat path and enclosure airflow.
- Published peak values are transient boundaries and must not be treated as continuous operating ratings.

Cable Routing, Grounding and EMC

PARAMETER	PUBLISHED VALUE	UNIT
Position Feedback Device	17-bit multi-turn communication magnetic absolute encoder	

- Provide strain relief and bend radius through the full machine motion envelope.
- Separate motor power, brake and feedback wiring and terminate shields according to the specified system grounding architecture.

Commissioning and Motion Validation

PARAMETER	PUBLISHED VALUE	UNIT
Rated Speed	3000	rpm
Rated Torque	0.32	Nm

- Commission at low energy with the transmission unloaded or safely restrained, then confirm direction, feedback polarity, brake final integration, current limit and fault response.
- Validate the complete axis through intended acceleration, speed, load, stop and fault cycles during integration planning.

Integration Checklist

- | | |
|----|--|
| 01 | Confirm the exact SKU, 2D drawing and applicable wiring data. |
| 02 | Verify mounting, shaft, coupling, alignment, fasteners and removal clearance. |
| 03 | Validate radial and axial loads, inertia, acceleration and credible shock cases. |
| 04 | Confirm drive, winding, feedback, brake and connector compatibility. |
| 05 | Set current, speed, acceleration and thermal limits from the installed duty cycle. |
| 06 | Verify cable routing, shielding, grounding, strain relief and bend radius. |
| 07 | Commission at low energy before validating the full machine cycle. |

[View SKU Product Datasheet](#) [Request controlled 2D drawing](#) [Request controlled STEP review](#) [Request a Quote](#)

Engineering Use and Verification Notice

01. This Dimensional & Integration Guide applies only to EmbodyStack SKU ES-SM-A03-040-TOP32NM-100W-001 and is intended for dimensional evaluation and preliminary integration. It is not a applicable manufacturing drawing, wiring definition, application approval, machinery risk assessment, safety validation or integration planning document. Before design freeze, machining, wiring or energization, verify all dimensions, tolerances, mounting and locating features, load boundaries, electrical interfaces, thermal conditions, cabling, grounding, protection, commissioning and applicable regulatory requirements against the applicable EmbodyStack engineering data for this exact SKU. Where this guide and applicable product documentation differ, the applicable product documentation governs. Validate the complete installed system under intended duty cycles, loads, accelerations, environmental conditions and credible fault cases.