

ENGINEERING DOCUMENTATION

Rotary Servo Motor

Dimensional & Integration Guide

DOCUMENT	REVISION / ISSUE	STATUS
DIG-ES-SM-A03-180G-T47P8NM-7500W-003	DRAFT-08 / 27 Aug 2026	Engineering Integration Reference

Integration Overview


Closed-loop rotary servo motor for specified motion axes. This guide supports mechanical mounting, shaft and coupling integration, feedback and brake planning, cable routing, thermal validation and staged commissioning.

Key Integration Facts


INTEGRATION ITEM	PUBLISHED VALUE
Rated Torque	47.8 N·m
Rated Speed	1500 rpm
Rated Voltage	380 VAC
Flange Size	180 mm

Product Structure & Views


These views present product structure, mounting interfaces and relevant integration geometry for this SKU.

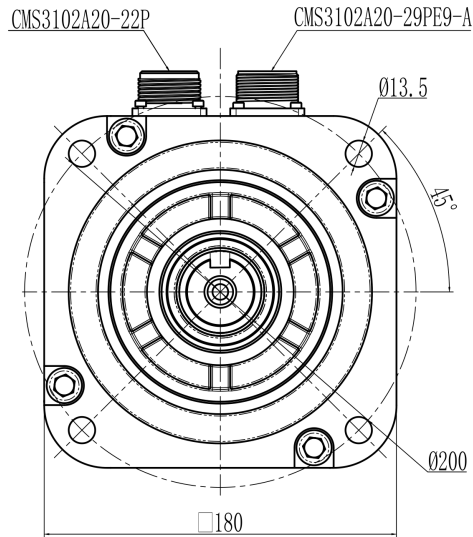


Mechanical View 1

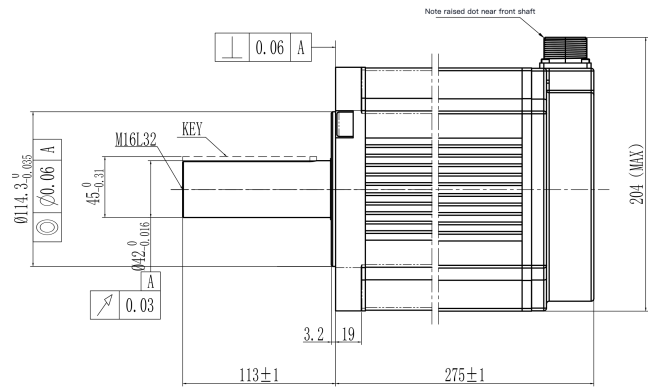

Mechanical View 2

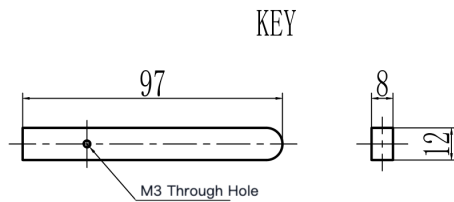

Mechanical View 3

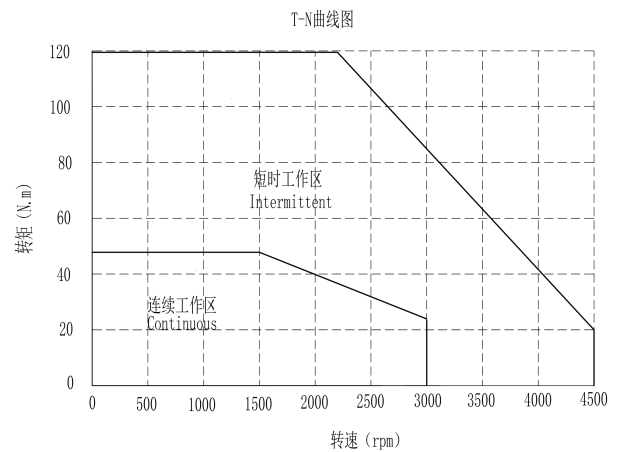

Mechanical View 10

VIEW	FIELD	VALUE
Mechanical View 1	Mounting hole diameter	Ø13.5 mm
	Mounting circle diameter	Ø200 mm
	Overall width	180 mm
	Mounting hole angular position	45°
Mechanical View 2	Connector mounting note	Raised dot near front shaft
	Position tolerance relative to datum A	Position 0.06 A
	Keyway designation	M16L32
	Maximum length	204 max
	Datum A	Datum A
	Shaft diameter (large end)	Ø114.3 0/-0.035
	Circular runout tolerance	Circular runout Ø0.06
	Shaft diameter (small end)	Ø42 0/-0.016
	Datum A (shaft end)	Datum A
	Perpendicularity tolerance	Perpendicularity 0.03
	Keyway depth	3.2
	Keyway width	19
	Axial distance 1	113±1
	Axial distance 2	275±1
	Shaft shoulder diameter	45 0/-0.31
Mechanical View 3	Keyway length	97 mm
	Keyway width	8 mm
	Keyway depth	12 mm
	M3 through hole	M3 through hole
	Key label	Key feature indicated
Mechanical View 10	Maximum torque	120 N.m
	Torque scale 100	100 N.m
	Torque scale 80	80 N.m
	Torque scale 60	60 N.m
	Torque scale 40	40 N.m
	Torque scale 20	20 N.m
	Torque origin	0 N.m
	Speed scale 500	500 rpm
	Speed scale 1000	1000 rpm
	Speed scale 1500	1500 rpm
	Speed scale 2000	2000 rpm
	Speed scale 2500	2500 rpm

VIEW	FIELD	VALUE
Speed scale 3000	3000 rpm	
Speed scale 3500	3500 rpm	
Speed scale 4000	4000 rpm	
Maximum speed	4500 rpm	
Speed axis label	Rotational speed n in rpm	
Torque axis label	Torque T in N.m	
Short-term workspace label	Short term workspace	
Continuous workspace label	Continuous workspace	

Overall Dimensions and Mounting Interface

PARAMETER	PUBLISHED VALUE	UNIT
Flange Size	180	mm

- Confirm the mounting face, locating feature, shaft geometry, fastener engagement and removal clearance against the applicable exact-SKU drawing.
- Mount the motor on a flat, rigid interface and avoid using fasteners to pull a misaligned assembly into position.

Shaft, Coupling and Load Path

PARAMETER	PUBLISHED VALUE	UNIT
Rotor Inertia	146.43 ()	Kg·cm ²

- Align the driven shaft and coupling before tightening; validate radial, axial and moment loads against applicable bearing-load data.
- Do not hammer, uncontrolled press-fit or transmit installation force through the motor bearings.

Electrical, Feedback and Brake Integration

PARAMETER	PUBLISHED VALUE	UNIT
Rated Voltage	380	VAC
Position Feedback Device	23-bit multi-turn communication optical absolute encoder	

- Use only the current winding, feedback, brake and connector definitions for this exact SKU.
- Verify drive compatibility, polarity, current limits, feedback direction and brake sequencing before enabling torque.

Thermal, Duty and Environmental Conditions

PARAMETER	PUBLISHED VALUE	UNIT
Rated Torque	47.8	Nm
Operating Temperature	20 40	°C

- Validate winding and housing temperature under the installed duty cycle, ambient condition, mounting heat path and enclosure airflow.
- Published peak values are transient boundaries and must not be treated as continuous operating ratings.

Cable Routing, Grounding and EMC

PARAMETER	PUBLISHED VALUE	UNIT
Position Feedback Device	23-bit multi-turn communication optical absolute encoder	

- Provide strain relief and bend radius through the full machine motion envelope.
- Separate motor power, brake and feedback wiring and terminate shields according to the specified system grounding architecture.

Commissioning and Motion Validation

PARAMETER	PUBLISHED VALUE	UNIT
Rated Speed	1500	rpm
Rated Torque	47.8	Nm

- Commission at low energy with the transmission unloaded or safely restrained, then confirm direction, feedback polarity, brake final integration, current limit and fault response.
- Validate the complete axis through intended acceleration, speed, load, stop and fault cycles during integration planning.

Integration Checklist

- | | |
|----|--|
| 01 | Confirm the exact SKU, 2D drawing and applicable wiring data. |
| 02 | Verify mounting, shaft, coupling, alignment, fasteners and removal clearance. |
| 03 | Validate radial and axial loads, inertia, acceleration and credible shock cases. |
| 04 | Confirm drive, winding, feedback, brake and connector compatibility. |
| 05 | Set current, speed, acceleration and thermal limits from the installed duty cycle. |
| 06 | Verify cable routing, shielding, grounding, strain relief and bend radius. |
| 07 | Commission at low energy before validating the full machine cycle. |

[View SKU Product Datasheet](#) [Request controlled 2D drawing](#) [Request controlled STEP review](#) [Request a Quote](#)

Engineering Use and Verification Notice

01. This Dimensional & Integration Guide applies only to EmbodyStack SKU ES-SM-A03-180G-T47P8NM-7500W-003 and is intended for dimensional evaluation and preliminary integration. It is not a applicable manufacturing drawing, wiring definition, application approval, machinery risk assessment, safety validation or integration planning document. Before design freeze, machining, wiring or energization, verify all dimensions, tolerances, mounting and locating features, load boundaries, electrical interfaces, thermal conditions, cabling, grounding, protection, commissioning and applicable regulatory requirements against the applicable EmbodyStack engineering data for this exact SKU. Where this guide and applicable product documentation differ, the applicable product documentation governs. Validate the complete installed system under intended duty cycles, loads, accelerations, environmental conditions and credible fault cases.