

PRODUCT DATASHEET

ES-BR-C27-S011-V024

65 mm Precision Transmission Component

Precision Crossed Roller Bearings | Precision Crossed Roller Bearing Platform 06 Series

Product Overview

65 mm Precision Transmission Component with body Outer Diameter 65 mm, radial Dynamic Load Rating 8.33 kN and mass 0.16 kg.

Key Specifications

PARAMETER	VALUE	UNIT
Body Outer Diameter	65	mm
Radial Dynamic Load Rating	8.33	kN
Mass	0.16	kg
Bearing Width	10	mm
Minimum Chamfer Radius	0.6	mm
Inner Ring Diameter	40	mm
Pitch Circle Diameter	51.2	mm
Radial Static Load Rating	10.6	kN
Shaft Diameter	40	mm

Technical Specifications


PARAMETER	SPECIFICATION	UNIT
PERFORMANCE		
Radial Dynamic Load Rating	8.33	kN
Radial Static Load Rating	10.6	kN
MECHANICAL		
Body Outer Diameter	65	mm
Mass	0.16	kg
Bearing Width	10	mm
Shaft Diameter	40	mm
Minimum Chamfer Radius	0.6	mm
Pitch Circle Diameter	51.2	mm
Shoulder Diameter Dh	57.5	mm
Inner Ring Diameter	40	mm
Shoulder Diameter ds	47.5	mm

Dimensional & Integration Overview

Mechanical Overview

PARAMETER	VALUE	UNIT
Body Outer Diameter	65	mm
Mass	0.16	kg
Bearing Width	10	mm
Shaft Diameter	40	mm
Minimum Chamfer Radius	0.6	mm
Pitch Circle Diameter	51.2	mm

Dimensional Drawings

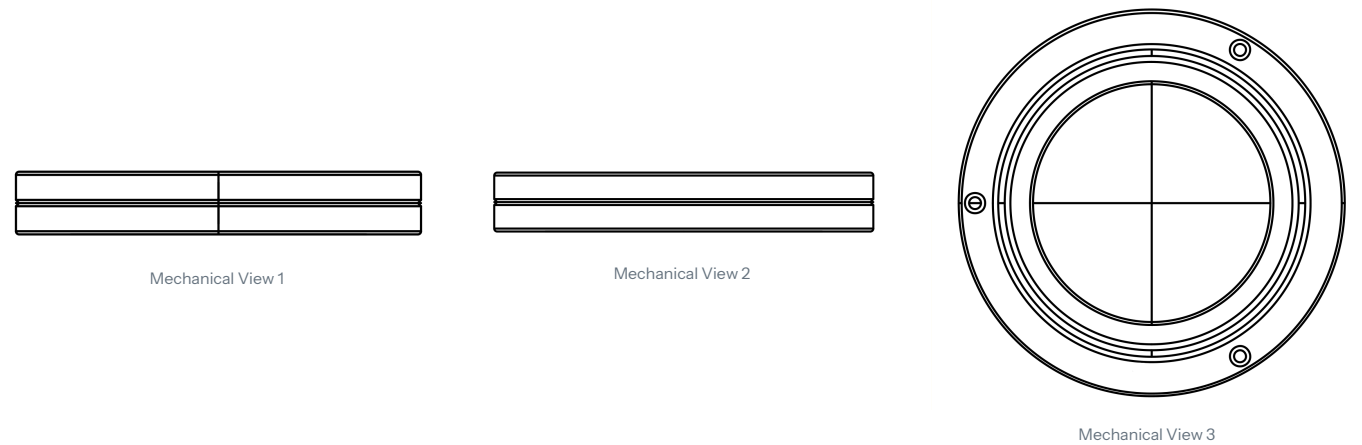

[View Product Online](#)[Request Engineering Data](#)[Request a Quote](#)

- 01

Specifications are subject to change without notice. Verify the current product configuration before final design release.
- 02

2D drawings, CAD files and integration documentation are controlled documents and are supplied separately on request.