

ENGINEERING DOCUMENTATION

# Standard Hat Unit Type I

## Dimensional & Integration Guide

| DOCUMENT              | REVISION / ISSUE       | STATUS                            |
|-----------------------|------------------------|-----------------------------------|
| DIG-ES-HG-S24-F20-R30 | DRAFT-08 / 28 Aug 2026 | Engineering Integration Reference |

### Integration Overview


Standard Hat Unit Type I for compact, coaxial, high-ratio rotary-axis integration. This guide supports interface planning, mounting alignment, duty validation, torsional behavior, lubrication, sealing and commissioning for ES-HG-S24-F20-R30.

### Key Integration Facts


| INTEGRATION ITEM | VALUE |
|------------------|-------|
| Reduction Ratio  | 30    |
| Frame Size       | 20    |

## Product Structure & Views


These views present the selected product structure, mounting interfaces and relevant integration geometry for this SKU.

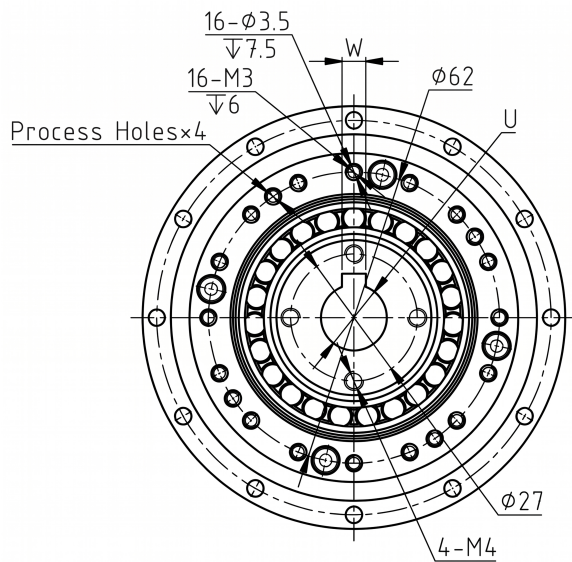


Mechanical View 1

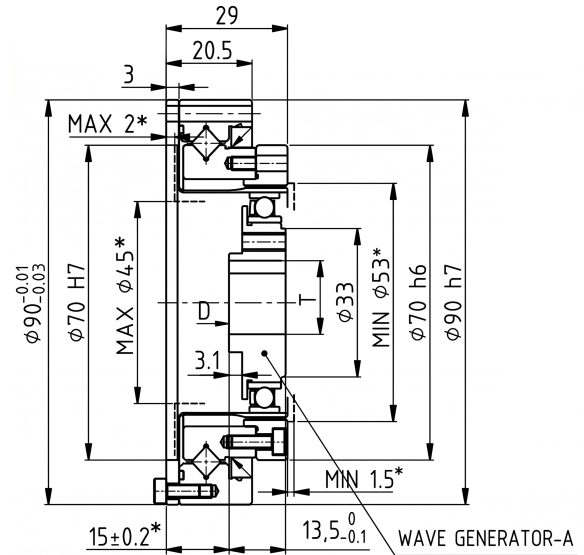

Mechanical View 2

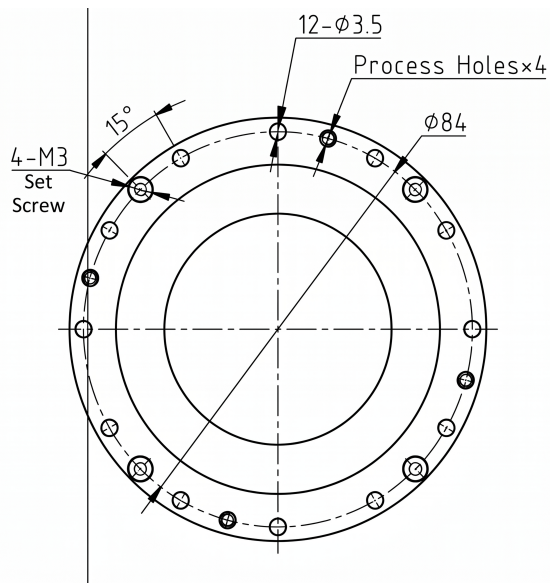

Mechanical View 3

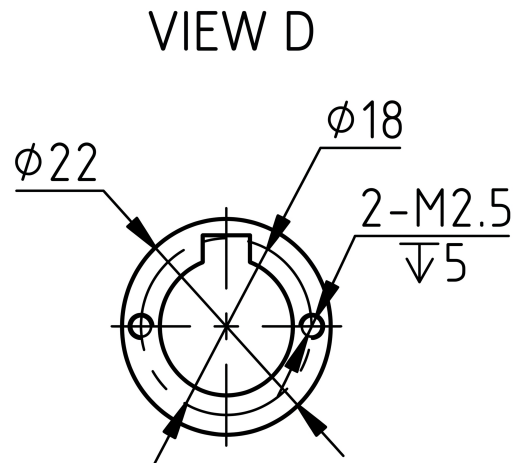

Mechanical View 4



| VIEW              | FIELD                                           | VALUE                                                              |
|-------------------|-------------------------------------------------|--------------------------------------------------------------------|
| Mechanical View 1 | Sixteen diameter 3.5 holes                      | 16 holes, diameter 3.5 mm                                          |
|                   | Depth-style value for diameter 3.5 hole callout | D/depth-style value 7.5 mm associated with 16- $\varnothing$ 3.5   |
|                   | Sixteen M3 threaded holes                       | 16 threaded holes, M3                                              |
|                   | Depth-style value for M3 threaded holes         | D/depth-style value 6 mm associated with 16-M3                     |
|                   | Outer diameter                                  | Diameter 62 mm                                                     |
|                   | Width symbol W                                  | Width symbol W; numeric value not specified in this crop           |
|                   | Interface or orientation label U                | Label U; numeric value not specified                               |
|                   | Process holes quantity                          | Process holes $\times$ 4                                           |
|                   | Diameter 27 hole or circular feature            | Diameter 27 mm                                                     |
|                   | Four M4 threaded holes                          | 4 threaded holes, M4                                               |
| Mechanical View 2 | Upper overall length                            | 29 mm                                                              |
|                   | Upper step length                               | 20.5 mm                                                            |
|                   | End small step width                            | 3 mm                                                               |
|                   | Maximum clearance or chamfer dimension          | Maximum 2 mm, starred condition                                    |
|                   | Left outer mounting diameter with tolerance     | Diameter 90 mm, upper deviation -0.01 mm, lower deviation -0.03 mm |
|                   | Left bore or mating diameter                    | Diameter 70 mm H7 fit                                              |
|                   | Maximum allowed diameter                        | Maximum diameter 45 mm, starred condition                          |
|                   | Datum or section marker D                       | Datum/marker D                                                     |
|                   | Local end dimension                             | 3.1 mm                                                             |
|                   | Shaft end diameter                              | Diameter 33 mm                                                     |
|                   | Minimum allowed diameter                        | Minimum diameter 53 mm, starred condition                          |
|                   | Right shaft fit diameter                        | Diameter 70 mm h6 fit                                              |
|                   | Right outer fit diameter                        | Diameter 90 mm h7 fit                                              |
|                   | Minimum clearance dimension                     | Minimum 1.5 mm, starred condition                                  |
|                   | Bottom local length with tolerance              | 13.5 mm, upper deviation 0 mm, lower deviation -0.1 mm             |
|                   | Bottom left length with tolerance               | 15 mm $\pm$ 0.2 mm, starred condition                              |
|                   | Component name                                  | Wave Generator-A                                                   |
|                   | Datum or section marker T                       | Datum/marker T                                                     |
| Mechanical View 3 | Diameter of 12 holes                            | 12 holes, diameter $\varnothing$ 3.5                               |
|                   | Number of process holes                         | Process holes quantity 4                                           |
|                   | Hole pitch circle diameter                      | Diameter $\varnothing$ 4                                           |
|                   | M3 set screw quantity                           | 4 $\times$ M3 set screws                                           |
|                   | Hole angular spacing                            | 15°                                                                |
| Mechanical View 4 | View D label                                    | View D                                                             |
|                   | Hole diameter                                   | Diameter 18 mm                                                     |
|                   | Outer diameter                                  | Diameter 22 mm                                                     |
|                   | Threaded hole quantity and size                 | 2 $\times$ M2.5 threaded holes                                     |
|                   | Depth-style value for M2.5 threaded holes       | D/depth-style value 5 mm associated with 2-M2.5                    |

## Overall Dimensions and Input Interface

| PARAMETER       | VALUE | UNIT |
|-----------------|-------|------|
| Frame Size      | 20    |      |
| Reduction Ratio | 30    |      |

## Input Interface Design Guidance

- Confirm the selected series, frame size, ratio and product form before using dimensions or interface geometry.
- Design the input shaft, key, engagement and axial retention for the verified torque and assembly state.
- Reserve assembly, sealing, inspection and removal access around input, housing and output interfaces.

## Mounting, Alignment and Fastener Control

- Keep mounting faces flat, clean and free of burrs, debris and coating buildup.
- Control concentricity, tilt and axial position of input and housing datums.
- Tighten fasteners in a staged diagonal sequence and verify free, even rotation during assembly.

---

## Torque, Speed and Duty Boundaries

- Calculate torque and speed from acceleration, constant-speed, deceleration, dwell and reversal portions of the complete cycle.
- Treat start/stop peak and instantaneous maximum torque as transient boundaries.
- Validate life against actual torque, speed, shock frequency, lubrication, temperature, alignment and external loading.

## Transmission Accuracy and Torsional Rigidity

- Installed positioning depends on reducer behavior, datum control, structural stiffness, motor and encoder errors and thermal growth.
- Use stiffness regions and transition torques when evaluating compliance, resonance, control gain and reversal.

---

## Lubrication, Sealing and Thermal Control

- Use the specified lubricant, fill method and quantity for the exact configuration; do not mix incompatible lubricants.
- Provide compatible sealing at input, output and housing interfaces without distorting the reducer.
- Validate lubricant distribution and temperature for orientation, speed, load cycle and enclosure.
- Prevent chips, fibers, residue and moisture from entering gear or bearing cavities.

## Output Bearing and External Load Path

- Calculate radial, axial and moment loads including offset, acceleration, gravity, process force, impact and emergency stops.
- Do not infer permissible external load from reducer torque capacity or frame size.
- Avoid forcing, impact, misalignment or host distortion through the output support during installation and operation.

---

## Integration Checklist

- |    |                                                                                                 |
|----|-------------------------------------------------------------------------------------------------|
| 01 | Confirm the selected series, frame size, ratio and product form for this SKU.                   |
| 02 | Verify available dimensions and interface geometry without substituting a nearby configuration. |
| 03 | Check mounting-face flatness, concentricity, tilt, reliefs, cleanliness and support stiffness.  |
| 04 | Verify input shaft, key, engagement length and axial retention.                                 |
| 05 | Use staged diagonal tightening and verify free, even rotation.                                  |
| 06 | Calculate average, start/stop peak and shock torque over the complete cycle.                    |
| 07 | Validate average and maximum input speed, design life and thermal condition.                    |
| 08 | Evaluate backlash, angular accuracy, hysteresis and stiffness for the control system.           |
| 09 | Confirm lubricant, fill quantity, orientation, sealing and contamination controls.              |
| 10 | Validate output radial, axial and moment loads using applicable bearing data.                   |

---

[View SKU Product Datasheet](#)   [Request controlled 2D drawing](#)   [Request controlled STEP review](#)   [Request a Quote](#)

### Engineering Use and Verification Notice

---

**01.** This Dimensional & Integration Guide applies only to EmbodyStack SKU ES-HG-S24-F20-R30 and supports preliminary dimensional evaluation and integration. It is not a manufacturing drawing, reducer selection approval, bearing-load approval, lubrication specification, machinery risk assessment, safety validation or integration planning document. Before design freeze, assembly or commissioning, verify all dimensions, datum geometry, fits, interfaces, retention, fasteners, torque and speed duty, shock cases, torsional behavior, external loads, lubrication, sealing, temperature, contamination and maintenance requirements against the current EmbodyStack engineering data for this exact SKU. Validate the complete reducer, motor, host structure, output load, motion cycle, guarding, fault cases and applicable regulatory requirements under intended operating conditions.